

2025
LIGHTING CATALOGUE



NANOLED LIGHTING

It is a brand of Tecnocavi Service srl
61021 Carpegna (PU) via Pian dei Roghi, 32
Tel. + 39 0722 77418
info@nanoledlighting.com
www.nanoledlighting.com

Our research and knowledge leads us time and time again to experiment with new forms of lighting and to supply our customers with quality products that last.

NANOLED LIGHTING is the lighting brand belonging to Tecnocavi Service, an Italian company founded in 1994 that has been producing and marketing LED lights nationally and internationally since 2003.

The aim of NANOLED LIGHTING is to offer lighting specialists, the furniture industry, architects and interior design contractors targeted, reliable and high-quality LED lighting solutions as they are exclusively manufactured in Italy by qualified craftsmen. NANOLED LIGHTING selects reliable suppliers and quality materials to make its lights, so that the finished product provides the user with long-lasting use.

Thanks to its own equipment and production facilities, NANOLED LIGHTING can process aluminium, steel and polycarbonate, and assemble electronic boards.

This offers a great advantage to architects and designers who also have the possibility of customising and adapting products to their clients' broader needs.

The exponential development of LED technology has also highlighted photobiological issues, and NANOLED LIGHTING - considering this aspect that is fundamental for people's health and in some cases also for environmental protection - offers sustainable and ecodesign-compliant products.

Lastly, NANOLED LIGHTING provides and accompanies its partners with all the photometric, technical and commercial support needed to integrate its lighting systems into a wide variety of projects. 100% of the products are checked and tested before being shipped. The company's entire production system is accredited by the European body IMQ, which periodically checks that all procedures adopted are up to date and comply with ISO9001:2015 certification.





INDEX BY PRODUCT FAMILY

MICROSPOT

DUST	16
DUST KIT	17
SKY	18
SKY KIT	19
ALGOL	20
HALLEY	21

INDOOR FLUSH FITTINGS

MINI VESTA	24
EOS	25
EOS Q	26
EOS CEILING LIGHT	27
EOS W	28
EOS W Q	29
EOS METAL	30
EOS METAL Q	31
IRIDE W	32
ZEFIRO W	33
VALLY	34
GIORDAN	35
GIORDAN CEILING LIGHT	36
TICHE	37
TICHE CEILING LIGHT	38
TICHE Q	39
TICHE Q CEILING LIGHT	40
TICHE MAXI	41
BASIK 1	42
BASIK Q	43
BIONIK 1	44
BIONIK Q	45
SIMPLE	46
SIMPLE Q	47
SIMPLE M	48
SIMPLE M Q	49
SIMPLE W	50
FOUR HOLE	51

FOUR HOLE Q	52
EGO METAL	53
EGO METAL Q	54
REMOVE PLUS	55
REMOVE MINUS	56
PAD	57
ERMA	58

INDOOR AND OUTDOOR RECESSED LIGHTS

REMOVE PLUS WP	62
HOLLY	63
HALISSA	64
MEMO	65
DEHO 2	66
DEHO 3	67
DEHO 4	68
DEHO 5	69
DEHO Q	70
DARDO 2	71
DARDO 3	72
DARDO Q	73
ACSO 1	74
ACSO 2	75
ACSO 3	76
ACRUX 1	77

316 L RECESSED LIGHTS

DEHO 1 L	80
DEHO 1 L Q	81
DEHO 2 L	82
DEHO 3 L	83
DEHO 4 L	84
DEHO 5 L	85
DEHO Q L	86

INDEX BY PRODUCT FAMILY

PROJECTORS

DUVAR	90
VERTIGO	91
ZEPPELIN	92

DECORATIVE TECHNICAL LIGHTING

PIXEL 1	96
ROMY	97
SARY	98
ISA	99
LILLY	100
EVA	101
LINEA	102
QUADRA Q1	103
QUADRA Q2	104
QUADRA Q3	105
QUADRA Q4	106
QUADRA R1	107
QUADRA R2	108
QUADRA R3	109
REM	110
CISO P31 CEILING LIGHT	111
CISO P33 CEILING LIGHT	112
CISO P50 CEILING LIGHT	113
CISO P80 CEILING LIGHT	114
CISO S31 PENDANT LIGHT	115
CISO S33 PENDANT LIGHT	116
CISO S50 PENDANT LIGHT	117
CISO S80 PENDANT LIGHT	118
CEILING ROSES FOR OTHER CISO COMPOSITIONS	119

LINEAR FLUSH-MOUNTED SYSTEM

EPTA	122
SIGMA	124
REFLEX	126
IOTA	128

RASO	130
RHO 1	132
YPSILON 1	134
DELTA 3	136
TAU	138
MILKY	140

CEILING-MOUNTED OR FLUSH-MOUNTED LINEAR SYSTEMS

MINI	144
JEY 1	146
JEY 2	148
ZETA 1	150
ZETA 2	152
RHO 3	154
VELA 1	156
VELA 2	158
GAMMA	160
VEGA	162
BETA	164
DELTA 1	166
KAPPA 3	168
QU	170
H1	172
H2	174
H3	176
C1	178
C2	180

LINEAR PENDANT SYSTEMS

JEY PENDANT	184
MAGNETIC JEY PENDANT	186
RHO PENDANT	188
DELTA PENDANT	190
KAPPA PENDANT	192
MAGNETIC KAPPA PENDANT	194

INDEX BY PRODUCT FAMILY

LINEAR WALL SYSTEMS

KAPPA 1	198
JEY 5	200

DIRECTIONAL LINEAR SYSTEMS

DIRECTIONAL RHO	204
DIRECTIONAL DELTA	206

FLOOR LINEAR SYSTEM

YPSILON FLOOR LIGHT	210
---------------------	-----

RGB SYSTEMS

SKY RGB	214
ALGOL RGB	215
HALLEY RGB	216
EOS RGB	217
BASIK 1 RGB	218
BASIK Q RGB	219
BIONIK 1 RGB	220
BIONIK Q RGB	221
FOUR HOLE RGB	222
FOUR HOLE Q RGB	223
DEHO 2 RGB	224
DEHO Q RGB	225
ACSO 1 RGB	226
VERTIGO RGB	227
DUVAR RGB	228

POWER SUPPLIES

350mA CONSTANT CURRENT	232
500mA CONSTANT CURRENT	233
CONSTANT CURRENT FOR COB	234
MULTICURRENT	235
CONSTANT VOLTAGE 12Vdc	236
CONSTANT VOLTAGE 24Vdc	237
CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH	239
EMERGENCY DEVICE	241

CONNECTION SYSTEMS

SERIES CONNECTION	244
PARALLEL CONNECTION	245
SERIES-PARALLEL CONNECTION	246
RGB CONNECTION	247

CONTROL SYSTEMS

SK-V1 CONTROL UNIT	250
RF.001 CONTROL UNIT	251
SR-1029 CONTROL UNIT	252
RFL20K CONTROL UNIT	253
SR-1029W CONTROL UNIT	254
1009FA3 CONTROL UNIT	255
DLM1224-1CV CONTROL UNIT	256
MINI-1CV CONTROL UNIT	257
MINI-1CV-DALI CONTROL UNIT	258
MINI-1CV-CASAMBI CONTROL UNIT	259
LINE-5CV CONTROL UNIT	260
DLX1224-4CV-DALI CONTROL UNIT	261
LINE 5CV-CASAMBI CONTROL UNIT	262
DLC1248-1CC350 CONTROL UNIT	263
DLC1248-1CC500 CONTROL UNIT	263
DLX1224-4CC350 CONTROL UNIT	264
DLX1224-4CC500 CONTROL UNIT	264
VOLUMETRIC SENSOR	265
INFRARED SENSOR	265
TOUCH SENSOR	265
TOUCH MINI SENSOR	266
TOUCH DIMMER SENSOR	266
MINI MOTION DETECTOR SENSOR	267
TOUCH SENSOR SWITCH SENSOR	267
IR SENSOR SWITCH SENSOR	267

INDEX BY PRODUCT FAMILY

INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK	270
ACSO AND ACRUX SERIES FORMWORK	270
ACSO AND ACRUX SERIES RING	270
DEHO AND DARDO SERIES FORMWORK	271
DEHO AND DARDO SERIES RING	271
PAD FORMWORK	271
REMOVE PLUS FORMWORK	272
REMOVE MINUS FORMWORK	272
DUVAR BASE AND STAKE	272

COMPLEMENTARY SYSTEMS

REM COMPLEMENTARY SYSTEMS	276
DARK COMPLEMENTARY SYSTEMS	276

ALPHABETICAL INDEX

12Vdc CONSTANT VOLTAGE POWER SUPPLIES	236
24Vdc CONSTANT VOLTAGE POWER SUPPLIES	237
24Vdc DALI2 and PUSH CONSTANT VOLTAGE POWER SUPPLIES	239
350mA CONSTANT CURRENT POWER SUPPLIES	232
500mA CONSTANT CURRENT POWER SUPPLIES	233

A

ACRUX 1	77
ACSO 1 RGB	226
ACSO 1	74
ACSO 2	75
ACSO 3	76
ACSO AND ACRUX SERIES FORMWORK	270
ACSO AND ACRUX SERIES RING	270
ALGOL RGB	215
ALGOL	20

B

BASIK 1 RGB	218
BASIK 1	42
BASIK Q RGB	219
BASIK Q	43
BETA	164
BIONIK 1 RGB	220
BIONIK 1	44
BIONIK Q RGB	221
BIONIK Q	45

C

C1	178
C2	180
CEILING ROSES FOR OTHER CISO COMPOSITIONS	119
CISO P31 CEILING LIGHT	111
CISO P33 CEILING LIGHT	112
CISO P50 CEILING LIGHT	113
CISO P80 CEILING LIGHT	114
CISO S31 PENDANT LIGHT	115
CISO S33 PENDANT LIGHT	116
CISO S50 PENDANT LIGHT	117

CISO S80 PENDANT LIGHT	118
CONSTANT CURRENT POWER SUPPLIES FOR COB	234

D

DARDO 2	71
DARDO 3	72
DARDO Q	73
DARK COMPLEMENTARY SYSTEMS	276
DEHO 1 L Q	81
DEHO 1 L	80
DEHO 2 L	82
DEHO 2 RGB	224
DEHO 2	66
DEHO 3 L	83
DEHO 3	67
DEHO 4 L	84
DEHO 4	68
DEHO 5 L	85
DEHO 5	69
DEHO AND DARDO SERIES FORMWORK	271
DEHO AND DARDO SERIES RING	271
DEHO Q L	86
DEHO Q RGB	225
DEHO Q	70
DELTA 1	166
DELTA 3	136
DELTA PENDANT	190
DIRECTIONAL DELTA	206
DIRECTIONAL RHO	204
DLC1248-1CC350 CONTROL UNIT	263
DLC1248-1CC500 CONTROL UNIT	263
DLM1224-1CV CONTROL UNIT	256
DLX1224-4CC350 CONTROL UNIT	264
DLX1224-4CC500 CONTROL UNIT	264
DLX1224-4CV-DALI CONTROL UNIT	261
DUST KIT	17
DUST	16
DUVAR BASE AND STAKE	272
DUVAR RGB	228
DUVAR	90

ALPHABETICAL INDEX

E

EGO METAL Q	54
EGO METAL	53
EMERGENCY DEVICES	241
EOS CEILING LIGHT	27
EOS METAL Q	31
EOS METAL	30
EOS Q	26
EOS RGB	217
EOS W Q	29
EOS W	28
EOS	25
EPTA	122
ERMA	58
EVA	101

F

FOUR HOLE Q RGB	223
FOUR HOLE Q	52
FOUR HOLE RGB	222
FOUR HOLE	51

G

GAMMA	160
GIORDAN CEILING LIGHT	36
GIORDAN	35

H

H1	172
H2	174
H3	176
HALISSA	64
HALLEY RGB	216
HALLEY	21
HOLLY	63
HOLLY, HALISSA AND MEMO FORMWORK	270

I

INFRARED SENSOR	265
IOTA	128

IR SENSOR SWITCH SENSOR	267
IRIDE W	32
ISA	99

J

JEY 1	146
JEY 2	148
JEY 5	200
JEY PENDANT	184

K

KAPPA 1	198
KAPPA 3	168
KAPPA PENDANT	192

L

LILLY	100
LINE 5CV-CASAMBI CONTROL UNIT	262
LINE-5CV CONTROL UNIT	260
LINEA	102

M

MAGNETIC JEY PENDANT	186
MAGNETIC KAPPA PENDANT	194
MEMO	65
MILKY	140
MINI MOTION DETECTOR SENSOR	267
MINI VESTA	24
MINI	144
MINI-1CV CONTROL UNIT	257
MINI-1CV-CASAMBI CONTROL UNIT	259
MINI-1CV-DALI CONTROL UNIT	258
MULTI-CURRENT POWER SUPPLIES	235

P

PAD FORMWORK	271
PAD	57
PARALLEL CONNECTION ACCESSORIES	245
PIXEL 1	96

ALPHABETICAL INDEX

Q

QU	170
QUADRA Q1	103
QUADRA Q2	104
QUADRA Q3	105
QUADRA Q4	106
QUADRA R1	107
QUADRA R2	108
QUADRA R3	109

R

RASO	130
REFLEX	126
REM COMPLEMENTARY SYSTEMS	276
REM	110
REMOVE MINUS FORMWORK	272
REMOVE MINUS	56
REMOVE PLUS FORMWORK	272
REMOVE PLUS WP	62
REMOVE PLUS	55
RF.001 CONTROL UNIT	251
RFL20K CONTROL UNIT	253
RGB CONNECTION ACCESSORIES	247
RHO 1	132
RHO 3	154
RHO PENDANT	188
ROMY	97

S

SARY	98
SERIES CONNECTION ACCESSORIES	244
SERIES-PARALLEL CONNECTION ACCESSORIES	246
SIGMA	124
SIMPLE M Q	49
SIMPLE M	48
SIMPLE Q	47
SIMPLE W	50
SIMPLE	46
SK-V1 CONTROL UNIT	250
SKY	18
SKY KIT	19

SKY RGB	214
SR-1009FA3 CONTROL UNIT	255
SR-1029 CONTROL UNIT	252
SR-1029W CONTROL UNIT	254

T

TAU	138
TICHE CEILING LIGHT	38
TICHE MAXI	41
TICHE Q CEILING LIGHT	40
TICHE Q	39
TICHE	37
TOUCH DIMMER SENSOR	266
TOUCH MINI SENSOR	266
TOUCH SENSOR SWITCH SENSOR	267
TOUCH SENSOR	265

V

VALLY	34
VEGA	162
VELA 1	156
VELA 2	158
VERTIGO RGB	227
VERTIGO	91
VOLUMETRIC SENSOR	265

Y

YPSILON 1	134
YPSILON FLOOR LIGHT	210

Z

ZEFIRO W	33
ZEPELIN	92
ZETA 1	150
ZETA 2	152

SYMBOLS

	Product compliant with European Electrical Safety Regulations.		Product that can be inserted in furniture.
	Product subject to European WEEE regulations on disposal of items.		Indicates that the product can be walked on.
	Product made with recyclable materials.		Indicates the type of optics (symmetrical or asymmetrical) and the degrees of aperture.
	Category III Products powered by safety voltage below 50V.		Size of hole to be drilled for mounting without formwork.
	Ingress Protection (see below).		Indicates that the product can be dimmed.
	Product that can be installed both indoors and outdoors.		Class I. Lighting system with earthing device.
	Product that can be installed indoors.		Category II Lighting system with reinforced or double insulation, without earthing device.
	Indicates the theoretical weight of the product, without wiring.		Can be switched on by touching the metal surface.
	Product suitable for mounting on normally flammable surfaces.		Compliance with the RoHs Directive 2002/95/EC that bans the use of hazardous substances in electrical and electronic equipment (lead, mercury, etc.)
	It means that the "wine" Amber color avoid the "taste of light". Compliant with the standards of the Comité Interprofessionnel du vin de Champagne (CIVC) for the lighting of cellars, storage rooms and furnishings.		

INGRESS PROTECTION

IP..

The 'resistance' offered by the device to penetration by solids and liquids is indicated by the prefix IP (international protection) followed by two significant numbers. The first number identifies the degree of protection against the ingress of solids. The second number identifies the degree of protection against the ingress of liquids.

IP0. Unprotected.

IP1. Protected against a solid object greater than 50 mm.

IP2. Protected against a solid object greater than 12 mm.

IP3. Protected against a solid object greater than 2.5 mm.

IP4. Protected against a solid object greater than 1 mm.

IP5. Protected against ingress of dust.

IP6. Completely protected against ingress of dust.

IP.0 Unprotected.

IP.1 Protected against vertical dripping water.

IP.2 Protected against vertical dripping water when tilted up 15°.

IP.3 Protected against rain.

IP.4 Protected against vertical splashing.

IP.5 Protected against jets of water.

IP.6 Protected against waves.

IP.7 Protected against effects from temporary immersion.




MICROSPOT

DUST	16
DUST KIT	17
SKY	18
SKY KIT	19
ALGOL	20
HALLEY	21

DUST

L93.

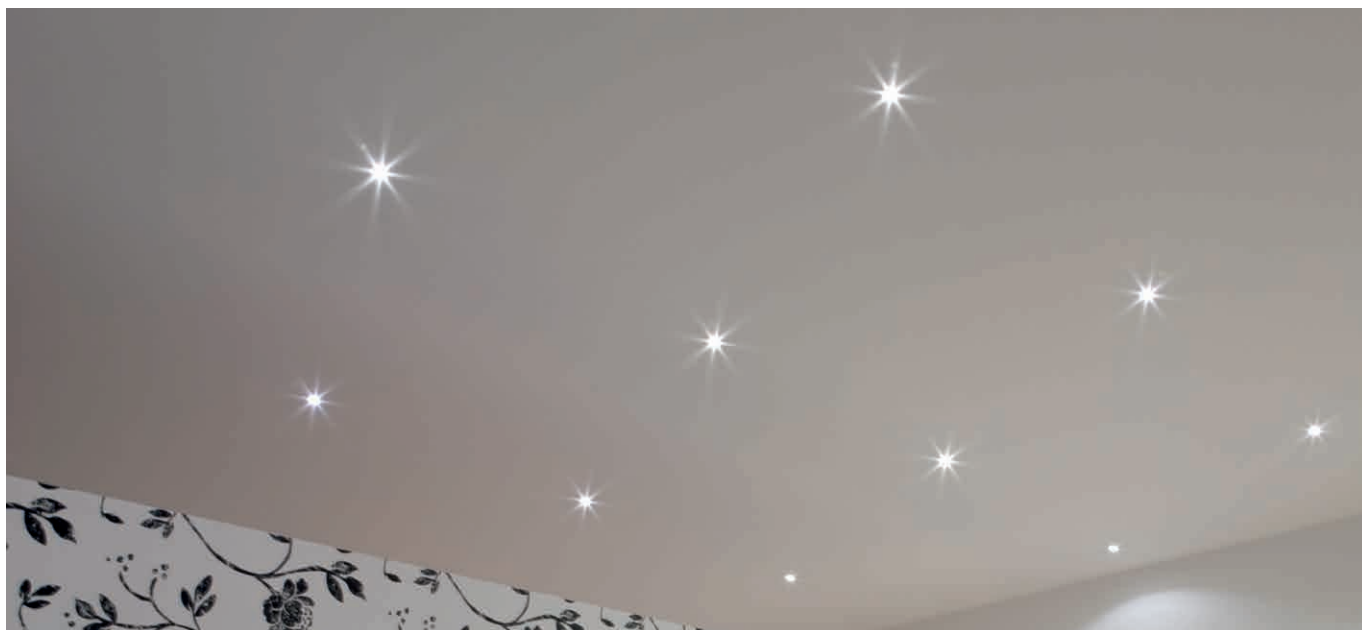

Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect. Can be installed indoors and outdoors if partially protected, spring-mounted.

3mm high-brightness LED

Power: 0.1W@3.2Vdc

Lumen: 2Lm@3.2Vdc

Constant voltage supply 12Vdc only with CNTG box and in groups of three

Mandatory connection in multiples of three with CNTG box, cable 150 cm


Compulsory accessories for connection page 246

Constant voltage power supplies page 236

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L93.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome

LED COLOUR


- ☒ **BF** 6000K
- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **BL** Blue
- ☐ **VE** Green

Code example:

DUST + White + 6000K = Code: L93.1BF

DUST KIT

KMQ.L93.

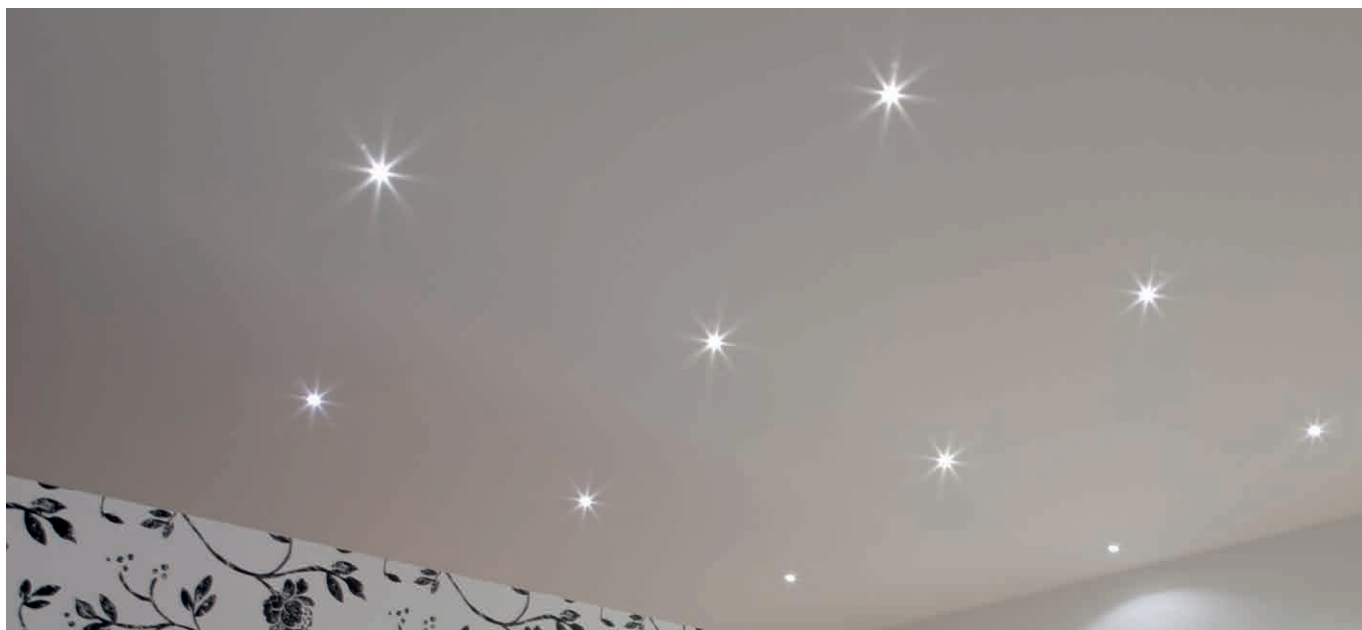

18-pack of the DUST model for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect on an area of 1 square metre. The package includes the connection box and power supply. Can be installed indoors and outdoors if partially protected, spring-mounted.

3mm high-brightness LED

Power: 0.1W@3.2Vdc

Lumen: 2Lm@3.2Vdc

Constant 12Vdc voltage supply and CNTG/18 box

Mandatory connection in multiples of three with CNTG box, cable 150 cm

Dimming Accessories page 249


No. 18 DUST




No. 1 CNTG/18 BOX




No. 1 POWER SUPPLY




 **MADE IN ITALY**



CNTG/18 BOX



POWER SUPPLY



BASIC CODES

KMQ.L93.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome

LED COLOUR

- ☒ **BF** 6000K
- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **BL** Blue
- ☐ **VE** Green

Code example:

DUST KIT + White + 6000K = Code: KMQ.L93.1BF

SKY

L90.



Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect. Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED

Power: 0.1W@3.2Vdc

Lumen: 2Lm@3.2Vdc

Constant voltage supply 12Vdc only with CNTG box and in groups of three

Mandatory connection in multiples of three with CNTG box, cable 150 cm


Compulsory accessories for connection page 246

Constant voltage power supplies page 236

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L90.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome

LED COLOUR

- ☒ **BF** 6000K
- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **BL** Blue

Code example:

SKY + Chrome + 3000K = Code: L90.6BC

SKY KIT

KMQ.L90.



18-pack of the SKY model for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect on an area of 1 square metre. The package includes the connection box and power supply. Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED

Power: 0.1W@3.2Vdc

Lumen: 2Lm@3.2Vdc

Constant 12Vdc voltage supply and CNTG/18 box

Mandatory connection in multiples of three with CNTG box, cable 150 cm

Dimming Accessories page 249


N°18 SKY




No. 1 CNTG/18 BOX




No. 1 POWER SUPPLY




 **MADE IN ITALY**



CNTG/18 BOX



POWER SUPPLY



BASIC CODES

KMQ.L90.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 6 Chrome

LED COLOUR

- ☒ BF 6000K
- ☐ BN 4000K
- ☐ BC 3000K
- ☐ BL Blue

Code example:

SKY KIT + Chrome + 3000K = Code: KMQ.L90.6BC

ALGOL

L80.




Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect. Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED
Power: 0.5W@12Vdc
Lumen: 6Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 150 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L80.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome

LED COLOUR

- ☒ **BF** 6000K
- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **BL** Blue

Code example:

ALGOL + Chrome + Blue = Code: L80.6BL

HALLEY

L31.



Flush-fitted in polished aluminium for accent, decoration and courtesy lighting. Also indicated for 'starry sky'. Choice of secondary optics, can be installed indoors and outdoors if partially protected, spring-mounted.

Power LED CRI>80

Power: 1W@350mA

Lumen: 135Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



Constant current power supplies page 232

Accessories for connection page 244

Dimming Accessories page 249



 **MADE IN ITALY**

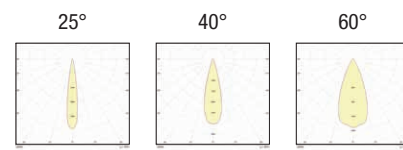

BASIC CODES

L31.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium

LIGHT BAND

- ☒ **25** 25°
- ☐ **40** 40°
- ☐ **60** 60°

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K
- ☐ **BL** Blue
- ☐ **VE** Green
- ☐ **RO** Red
- ☐ **AM** "Wine" Amber



Approved by
CIVC

Code example:

HALLEY + White + Light Beam 40° + 3000K = Code: L31.140BC




INDOOR FLUSH FITTINGS

MINI VESTA	24
EOS	25
EOS Q	26
EOS CEILING LIGHT	27
EOS W	28
EOS W Q	29
EOS METAL	30
EOS METAL Q	31
IRIDE W	32
ZEFIRO W	33
VALLY	34
GIORDAN	35
GIORDAN CEILING LIGHT	36
TICHE	37
TICHE CEILING LIGHT	38
TICHE Q	39
TICHE Q CEILING LIGHT	40
TICHE MAXI	41
BASIK 1	42
BASIK Q	43
BIONIK 1	44
BIONIK Q	45
SIMPLE	46
SIMPLE Q	47
SIMPLE M	48
SIMPLE M Q	49
SIMPLE W	50
FOUR HOLE	51
FOUR HOLE Q	52
EGO METAL	53
EGO METAL Q	54
REMOVE PLUS	55
REMOVE MINUS	56
PAD	57
ERMA	58

MINI VESTA

L9X.

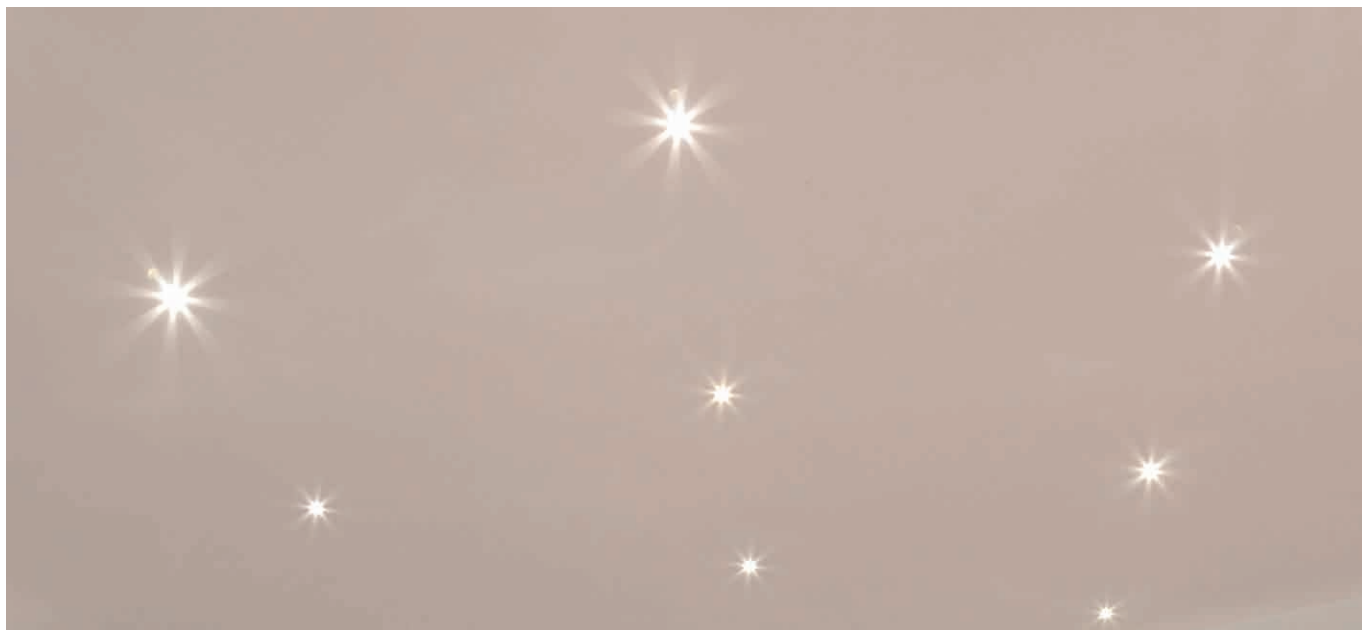

Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



Constant current power supplies page 232-233

Accessories for quick connection page 244

Dimming Accessories page 249



 **MADE IN ITALY**

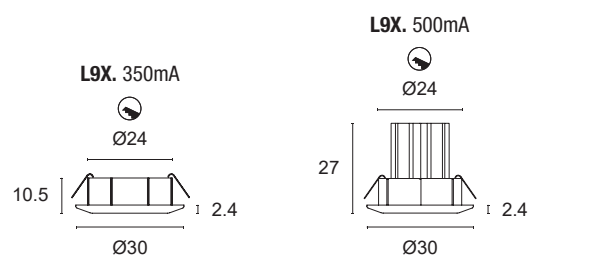

BASIC CODES

L9X.

FINISHES

- ☐ 1 White
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent

LIGHT BAND

- ☐ 00 120°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber



Approved by
CIVC

POWER

- 3 1x1W - 350mA - 135 lm**
- 5 1x2W - 500mA - 216 lm**

Code example:

MINI VESTA + White + 120° light beam + 3000K + 1W = Code: L9X.100BC3

EOS

L95.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



Constant current power supplies page 232-233

Accessories for quick connection page 244

Dimming Accessories page 249



 **MADE IN ITALY**

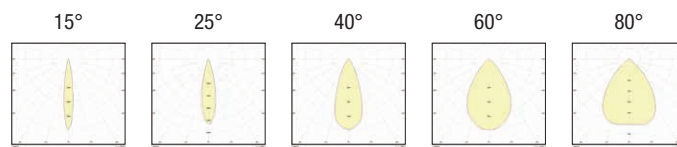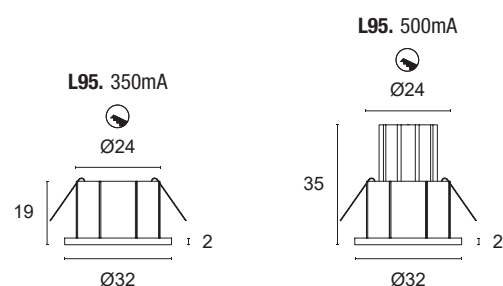

BASIC CODES

L95.

FINISHES

- ☐ 1 White
- ☐ 2 Matt black
- ☐ 3 Brushed gold
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent
- ☐ 9 Polished gold

LIGHT BAND

- ☐ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber

POWER

- 3 1x1W - 350mA - 135 lm**
- 5 1x2W - 500mA - 216 lm**



Approved by
CIVC

Code example:

EOS + Brushed Aluminium + 15° light beam + 3000K + 1W = Code: L95.715BC3

EOS Q

L9Q.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



Constant current power supplies page 232-233

Accessories for quick connection page 244

Dimming Accessories page 249



MADE IN ITALY

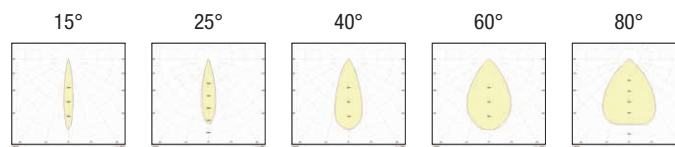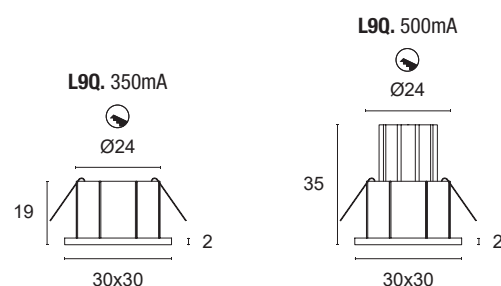

BASIC CODES

L9Q.

FINISHES

- ☐ 1 White
- ☐ 2 Matt black
- ☐ 3 Brushed gold
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent
- ☐ 9 Polished gold

LIGHT BAND

- ☐ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber

POWER

- 3 1x1W - 350mA - 135 lm**
- 5 1x2W - 500mA - 216 lm**



Approved by
CIVC

Code example:

EOS Q + Brushed Aluminium + 15° light beam + 3000K + 1W = Code: L9Q.715BC3

EOS CEILING LIGHT

L95D.



Thermoplastic ceiling light for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, mounting with concealed screws.

Power LED CRI>80

Power: 1W@350mA

Lumen: 135Lm@350mA


350mA constant current power supply

Series connection, 50 cm cable



Constant current power supplies page 232

Accessories for quick connection page 244

Dimming Accessories page 249



 **MADE IN ITALY**

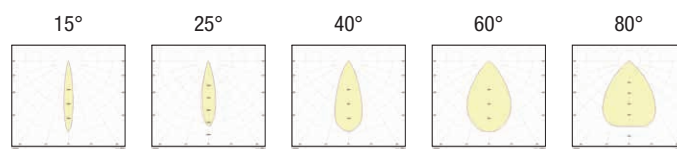

BASIC CODES

L95D.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 3 Brushed gold
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent
- ☐ 9 Polished gold

LIGHT BAND

- ☒ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber



Approved by
CIVC

Code example:

EOS CEILING LIGHT + Brushed Aluminium + 25° light beam + 3000K + 1W = Code: L95D.725RO

EOS W

L9512.





Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L9512.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 3 Brushed gold
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent
- ☐ 9 Polished gold

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

EOS W + White + 3000K = Code: L9512.1BC

EOS W Q

L9Q12.





Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L9Q12.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 3 Brushed gold
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent
- ☐ 9 Polished gold

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

EOS W Q + White + 3000K = Code: L9Q12.1BC

EOS METAL

L95M.



Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting.
Choice of secondary optics, can be installed indoors. Flush-mounted with springs.

Power LED CRI>80

Power: 2W@500mA


Lumen: 216Lm@500mA

500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 233

Dimming Accessories page 249



 **MADE IN ITALY**

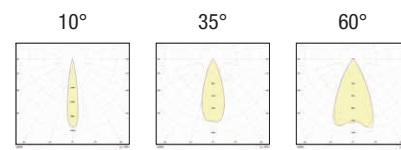

BASIC CODES

L95M.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LIGHT BAND

- ☒ **10** 10°
- ☐ **35** 35°
- ☐ **60** 60°

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K
- ☐ **BL** Blue
- ☐ **VE** Green
- ☐ **RO** Red
- ☐ **AM** "Wine" Amber




Approved by
C I V C

Code example:

EOS METAL + Brushed Aluminium + 40° light beam + 3000K = Code: L95M.740BC

EOS METAL Q

L9QM.

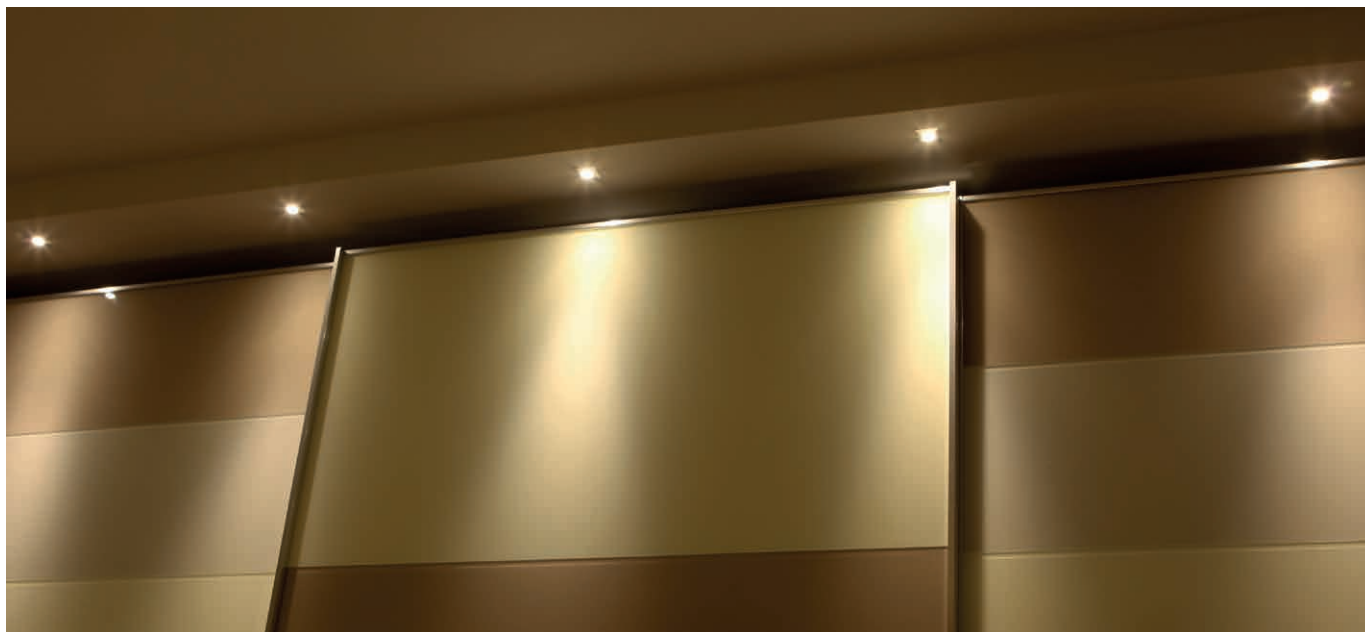

Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting.
Choice of secondary optics, can be installed indoors. Flush-mounted with springs.

Power LED CRI>80

Power: 2W@500mA


Lumen: 216Lm@500mA

500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 233

Dimming Accessories page 249



 **MADE IN ITALY**

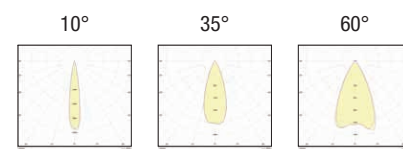

BASIC CODES

L95QM.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 7 Brushed aluminium

LIGHT BAND

- ☒ 10 10°
- ☐ 35 35°
- ☐ 60 60°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber



Approved by
CIVC

Code example:

EOS METAL Q + Brushed Aluminium + 40° light beam + 3000K = Code: L9QM.740BC

IRIDE W

L9912.





Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L9912.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **3** Brushed gold
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium
- ☐ **8** Transparent
- ☐ **9** Polished gold

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

IRIDE W + White + 3000K = Code: L9912.1BC

ZEFIRO W


L9812.





Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L9812.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 3 Brushed gold
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent
- ☐ 9 Polished gold

LED COLOUR


- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

ZEFIRO W + White + 3000K = Code: L9812.1BC

VALLY

F02LD.

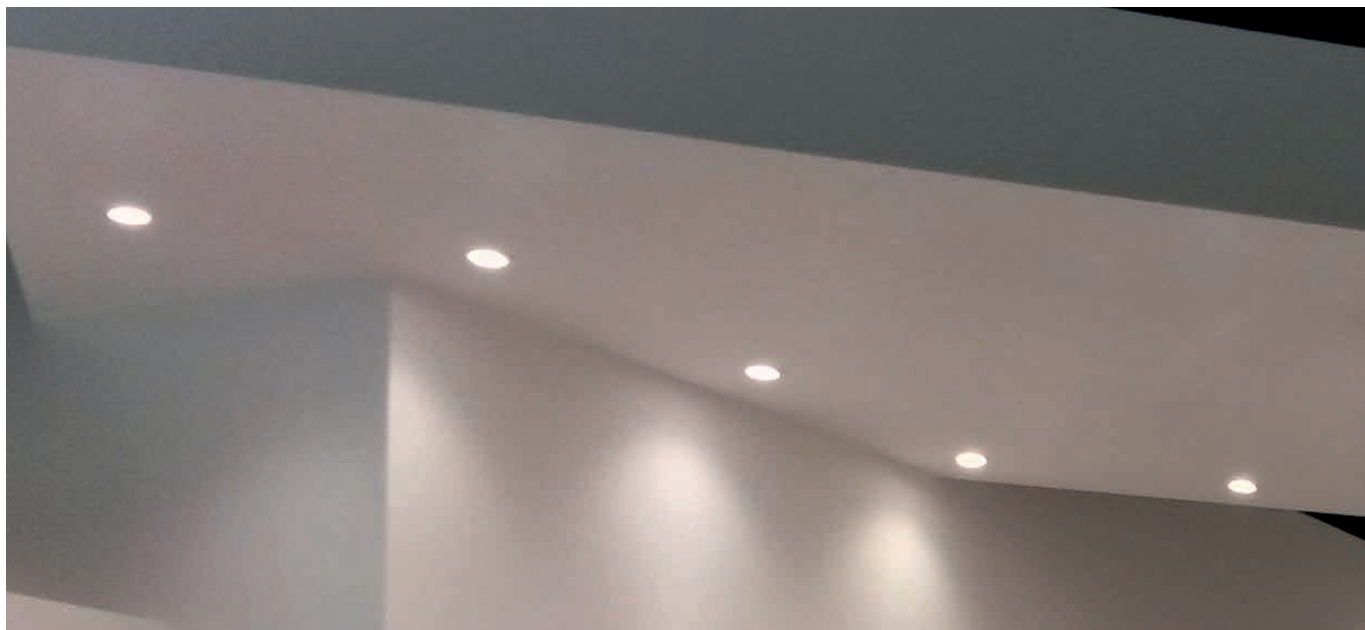

Printed metal light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 324Lm@12Vdc

Constant 12Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 236

Accessories for quick connection page 245

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

F02LD.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **4** Bronze
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium
- ☐ **9** Polished gold

GLASS

- ☒ **0** Opaline

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

VALLY + Brushed Aluminium + Opal Glass + 4000K = Code: F02LD.70BN

GIORDAN

F01LD.



Thermoplastic recessed light system for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 324Lm@12Vdc


Constant 12Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 236

Accessories for quick connection page 245

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

F01LD.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 4 Bronze
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 9 Polished gold

GLASS

- ☒ 0 Opaline

LED COLOUR

- ☐ BN 4000K
- ☒ BC 3000K
- ☐ CC 2700K

Code example:

GIORDAN + Brushed Aluminium + Opal Glass + 3000K = Code: F01LD.70BC

GIORDAN CEILING LIGHT

F01LDD.



Thermoplastic ceiling light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with concealed screws.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 324Lm@12Vdc


Constant 12Vdc voltage supply

Parallel connection, 50 cm cable


Constant voltage power supplies page 236

Accessories for quick connection page 245


Dimming Accessories page 249



 **MADE IN ITALY**



120°



BASIC CODES

F01LDD.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 4 Bronze
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 9 Polished gold

GLASS

- ☒ 0 Opaline

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

GIORDAN CEILING LIGHT + Brushed Aluminium + Opal Glass + 3000K = Code: F01LDD.70BC

TICHE

L15.



Polished aluminium light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs even on small surfaces.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 459Lm@12Vdc

Constant 12Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 236

Accessories for quick connection page 245

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L15.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **3** Brushed gold
- ☐ **4** Bronze
- ☐ **5** Gloss aluminium
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium
- ☐ **9** Polished gold

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

TICHE + Brushed aluminium + 3000K = Code: L15.7BC

TICHE CEILING LIGHT

L15D.



Polished aluminium ceiling light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with concealed screws.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 459Lm@12Vdc


Constant 12Vdc voltage supply

Parallel connection, 50 cm cable


Constant voltage power supplies page 236

Accessories for quick connection page 245


Dimming Accessories page 249



 **MADE IN ITALY**



120°



BASIC CODES

L15D.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LED COLOUR


- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

TICHE CEILING LIGHT + White + 3000K = Code: L15D.1BC

TICHE Q

L15Q.

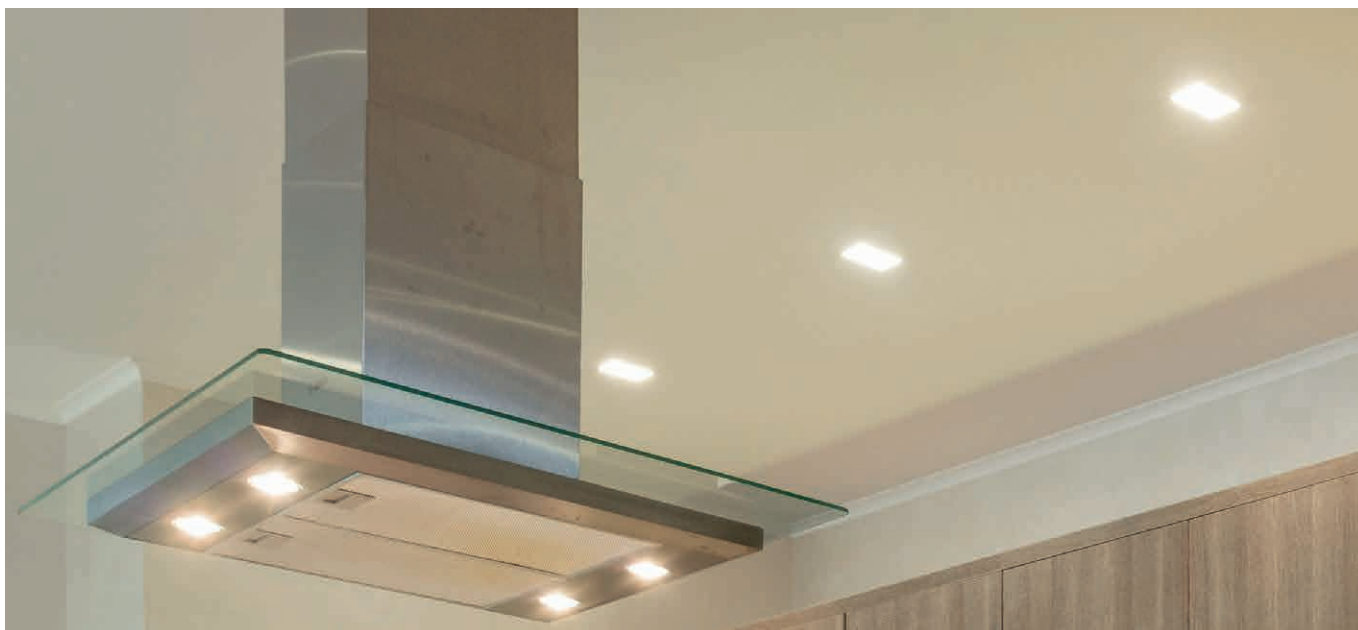

Polished aluminium light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs even on small surfaces.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 459Lm@12Vdc

Constant 12Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 236

Accessories for quick connection page 245

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L15Q.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **3** Brushed gold
- ☐ **4** Bronze
- ☐ **5** Gloss aluminium
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium
- ☐ **9** Polished gold

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

TICHE Q + Brushed aluminium + 3000K = Code: L15Q.7BC

TICHE Q CEILING LIGHT

L15QD.



Polished aluminium ceiling light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with concealed screws.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 459Lm@12Vdc

Constant 12Vdc voltage supply

Parallel connection, 50 cm cable


Constant voltage power supplies page 236

Accessories for quick connection page 245


Dimming Accessories page 249



 **MADE IN ITALY**



120°



BASIC CODES

L15QD.

FINISHES

- ☐ **1** White
- ☐ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LED COLOUR


- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

TICHE Q CEILING LIGHT + White + 3000K = Code: L15QD.1BC

TICHE MAXI

L15M.

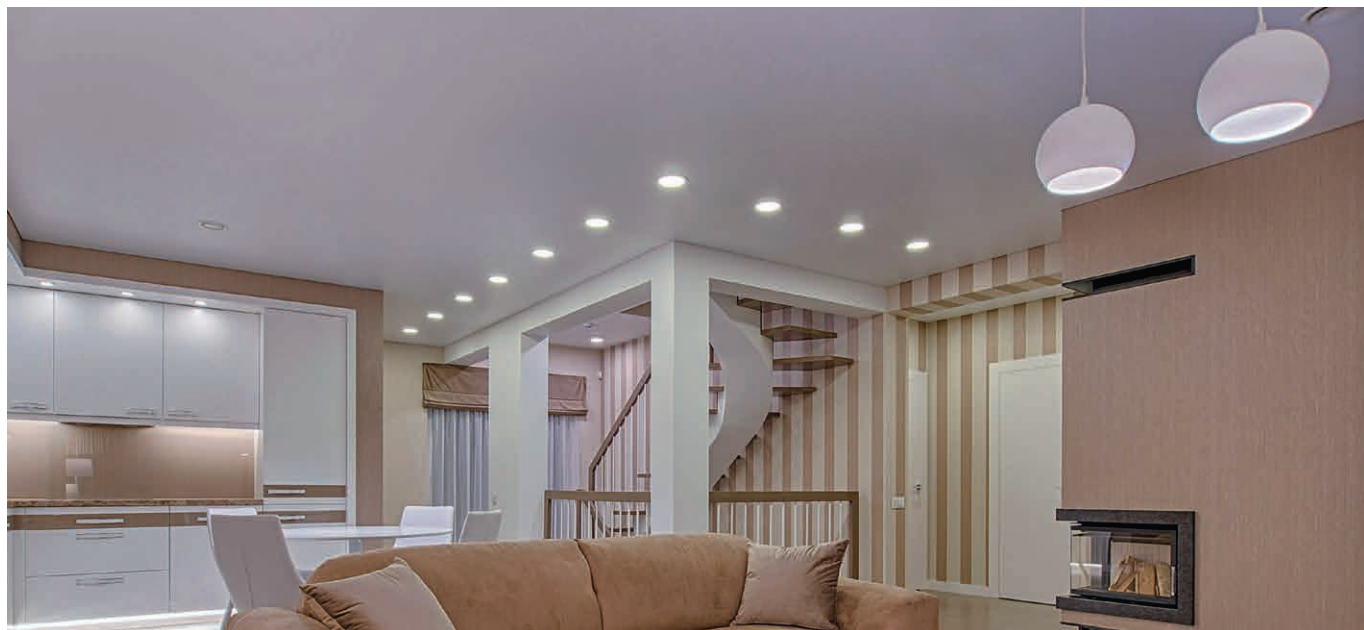

Polished aluminium recessed light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Flush mounting on plasterboard with pressure springs.

MID POWER LED CRI>80

Power: 9W@12Vdc

Lumen: 945Lm@12Vdc


Constant 12Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 236

Accessories for quick connection page 245

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L15M.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LED COLOUR


- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

TICHE MAXI + Brushed aluminium + 3000K = Code: L15M.7BC

BASIK 1

L01.

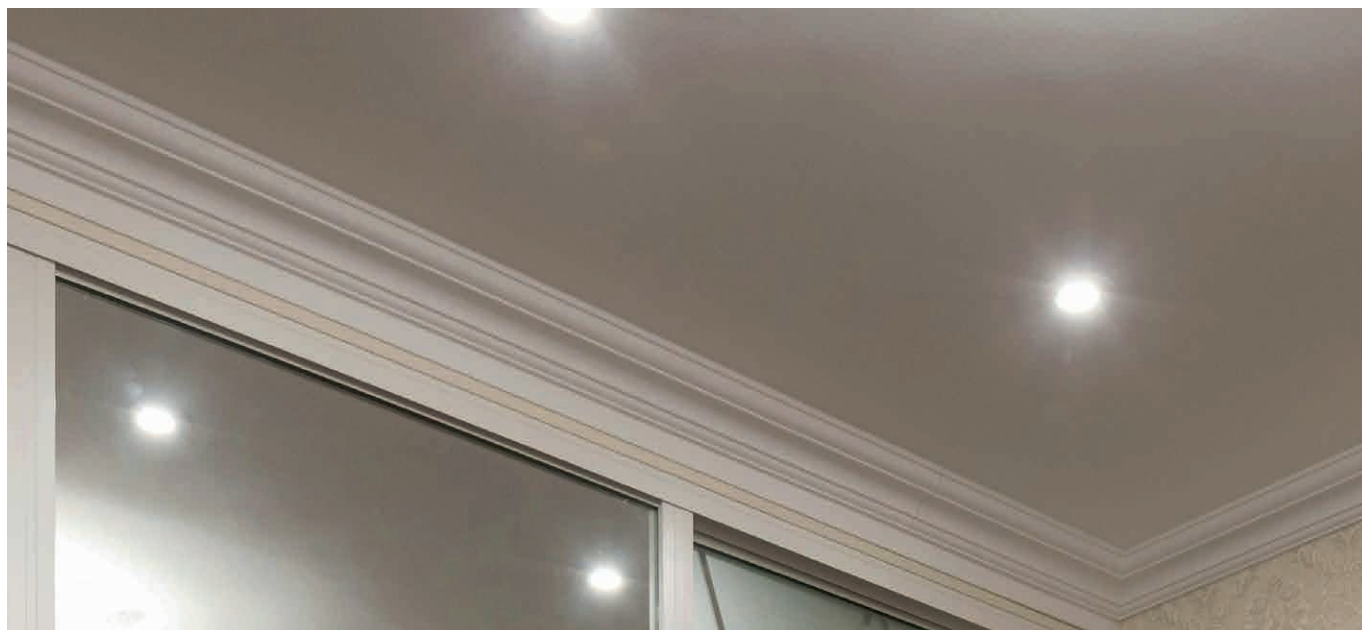

Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405Lm@350mA - 648Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Dimming Accessories page 249



 **MADE IN ITALY**

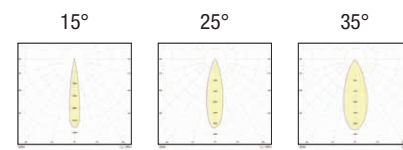

BASIC CODES

L01.

FINISHES

- ☐ **1** White
- ☐ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium

LIGHT BEAM

- ☐ **15** 15°
- ☐ **25** 25°
- ☐ **35** 35°

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K
- ☐ **BL** Blue
- ☐ **VE** Green
- ☐ **RO** Red
- ☐ **AM** "Wine" Amber



Approved by
CIVC

POWER

- 3 3x1W - 350mA - 405 lm**
- 5 3x2W - 500mA - 648 lm**

Code example:

BASIK 1 + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L01.715BC3

BASIK Q

L02.



Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405Lm@350mA - 648Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Dimming Accessories page 249



MADE IN ITALY

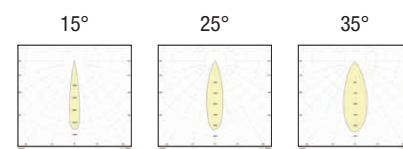

BASIC CODES

L02.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BEAM

- ☒ 15 15°
- ☐ 25 25°
- ☐ 35 35°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber



Approved by
CIVC

POWER


- 3 3x1W - 350mA - 405 lm**
- 5 3x2W - 500mA - 648 lm**

Code example:

BASIK Q + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L02.715BC3

BIONIK 1

L21.

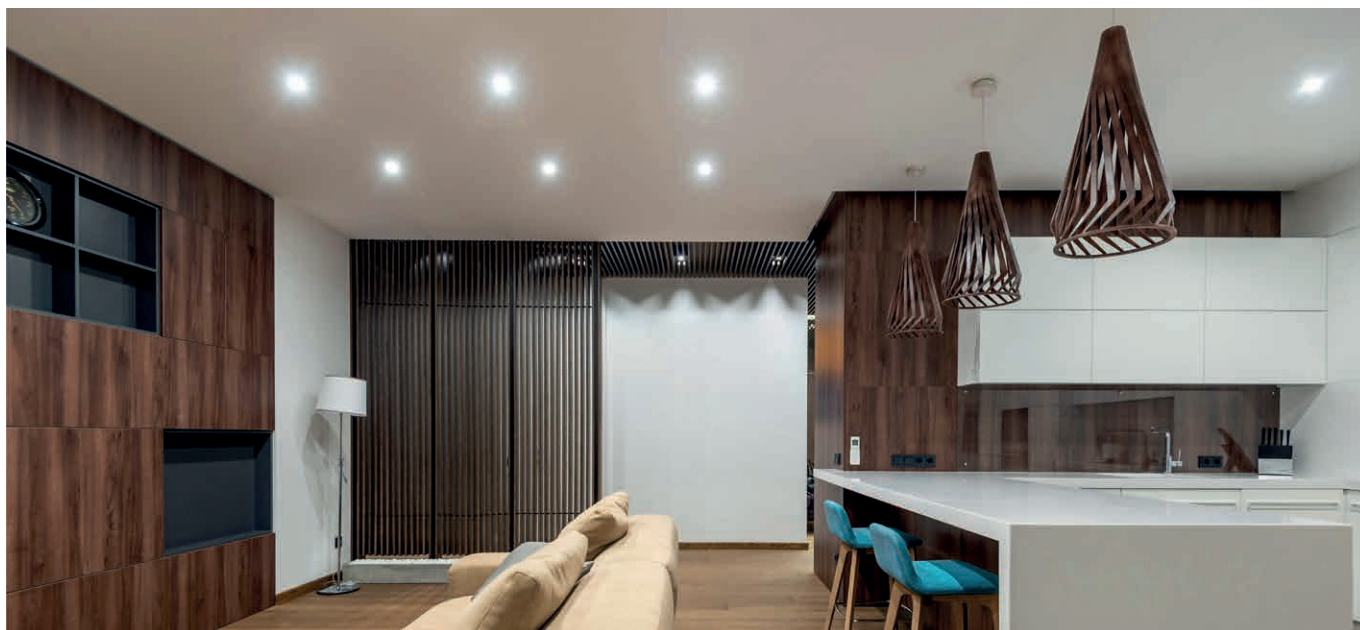

Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405Lm@350mA - 648Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Dimming Accessories page 249



MADE IN ITALY

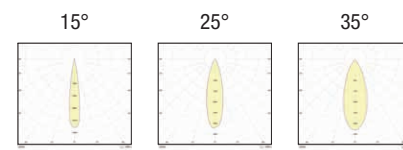

BASIC CODES

L21.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BEAM

- ☒ 15 15°
- ☐ 25 25°
- ☐ 35 35°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber



Approved by
CIVC

POWER

- 3 3x1W - 350mA - 405 lm**
- 5 3x2W - 500mA - 648 lm**

Code example:

BIONIK 1 + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L21.715BC3

BIONIK Q

L22.



Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405Lm@350mA - 648Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Dimming Accessories page 249



 **MADE IN ITALY**

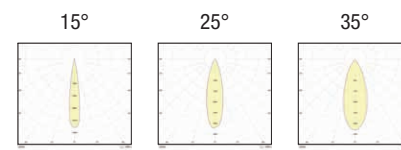

BASIC CODES

L22.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BEAM

- ☒ 15 15°
- ☐ 25 25°
- ☐ 35 35°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber



Approved by
CIVC

POWER

- 3 3x1W - 350mA - 405 lm**
- 5 3x2W - 500mA - 648 lm**

Code example:

BIONIK Q + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L22.715BC3

SIMPLE

L10.



Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in residential and retail environments. Choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors, spring-mounted.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA

200mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

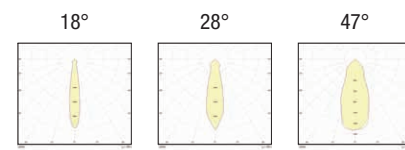

BASIC CODES

L10.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium

LIGHT BEAM

- ☒ **18** 18°
- ☐ **28** 28°
- ☐ **47** 47°

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

SIMPLE + White + Light Beam 18° + 4000K + 2W = Code: L10.118BN

SIMPLE Q

L10Q.



Polished aluminium recessed square light with COB LEDs CRI>90 for primary lighting in residential and retail environments. Choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors, spring-mounted.

COB LED CRI>90

Power: 7W@200mA


Lumen: 916Lm@200mA

200mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

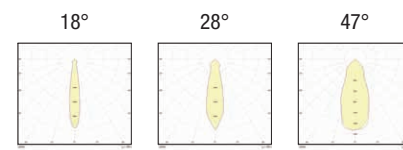

BASIC CODES

L10Q.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium

LIGHT BEAM

- ☒ **18** 18°
- ☐ **28** 28°
- ☐ **47** 47°

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

SIMPLE Q + White + Light Beam 18° + 4000K + 2W = Code: L10Q.118BN

SIMPLE M

L11.



Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in large residential and retail environments. Protected choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors. Spring mounted.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA

200mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

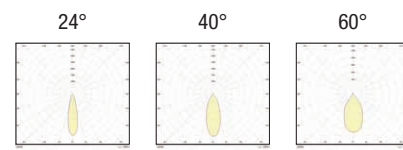

BASIC CODES

L11.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium

LIGHT BEAM

- ☒ **24** 24°
- ☐ **40** 40°
- ☐ **60** 60°

LED COLOUR


- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

SIMPLE M + White + Light Beam 24° + 4000K = Code: L11.124BN

SIMPLE M Q

L11Q.

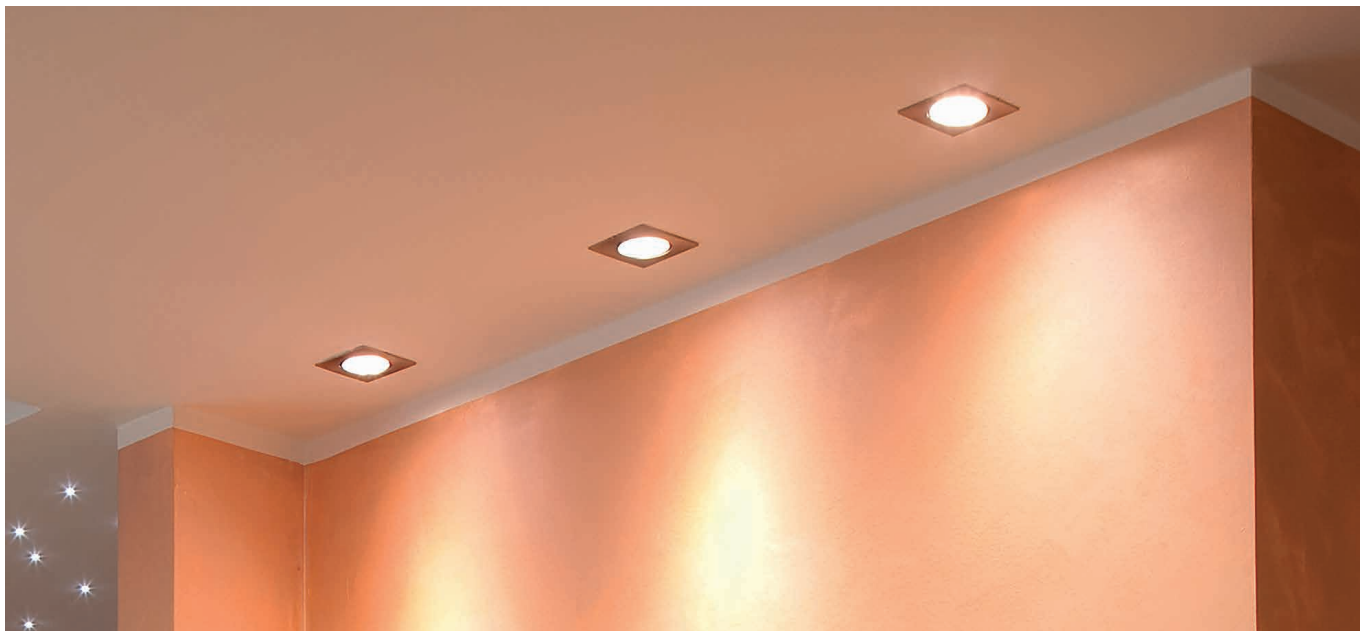

Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in large residential and retail environments. Protected choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors. Spring mounted.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA

200mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

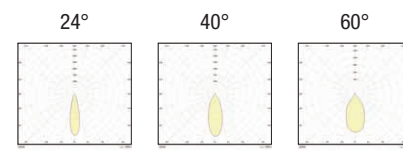

BASIC CODES

L11Q.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BEAM

- ☒ 24 24°
- ☐ 40 40°
- ☐ 60 60°

LED COLOUR

- ☐ BN 4000K
- ☒ BC 3000K
- ☐ CC 2700K

Code example:

SIMPLE M Q + White + Light Beam 24° + 4000K = Code: L11Q.124BN

SIMPLE W

L12.



Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in large residential and retail environments. Protected choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors. Spring mounted.

COB LED CRI>90

Power: 16W@450mA

Lumen: 1895lm@450mA

450mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

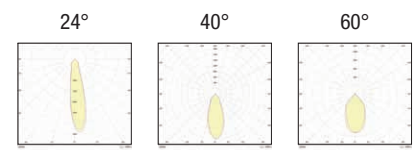

BASIC CODES

L12.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BEAM

- ☒ 24 24°
- ☐ 40 40°
- ☐ 60 60°

LED COLOUR


- ☐ BN 4000K
- ☒ BC 3000K
- ☐ CC 2700K

Code example:

SIMPLE W + White + Light Beam 24° + 4000K = Code: L12.124BN

FOUR HOLE

L24.

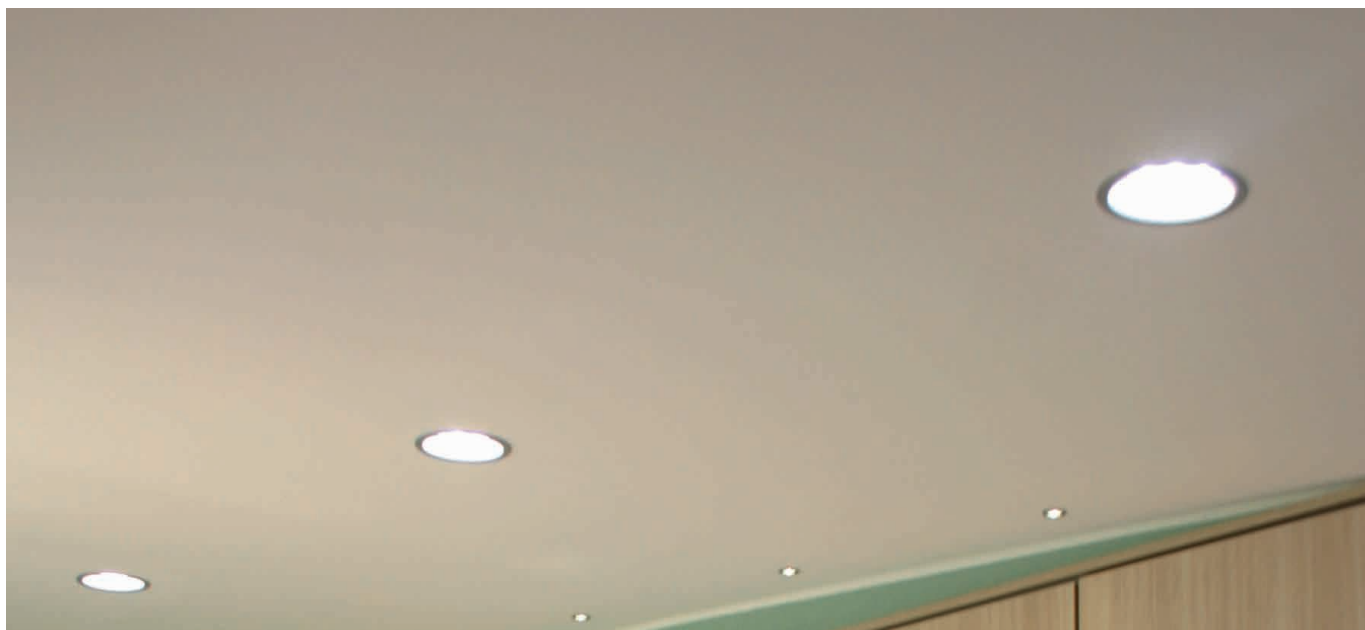

Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80

Power: 4W@350mA – 8W@500mA

Lumen: 540Lm@350mA – 864Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Dimming Accessories page 249



 **MADE IN ITALY**

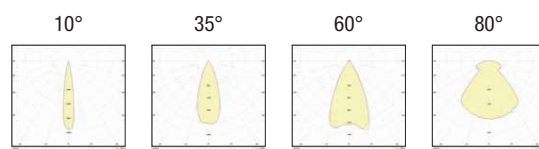

BASIC CODES

L24.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 7 Brushed aluminium

LIGHT BEAM

- ☒ 10 10°
- ☐ 35 35°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

- ☐ BN 4000K
- ☐ BC 3000K
- ☐ CC 2700K
- ☐ BL Blue
- ☐ VE Green
- ☐ RO Red
- ☐ AM "Wine" Amber

POWER

- 3 4x1W - 350mA - 540 lm**
- 5 4x2W - 500mA - 864 lm**




Approved by
CIVC

Code example:

FOUR HOLE + White + 80° light beam + 3000K + 4W = Code: L24.180BC3

FOUR HOLE Q

L25.

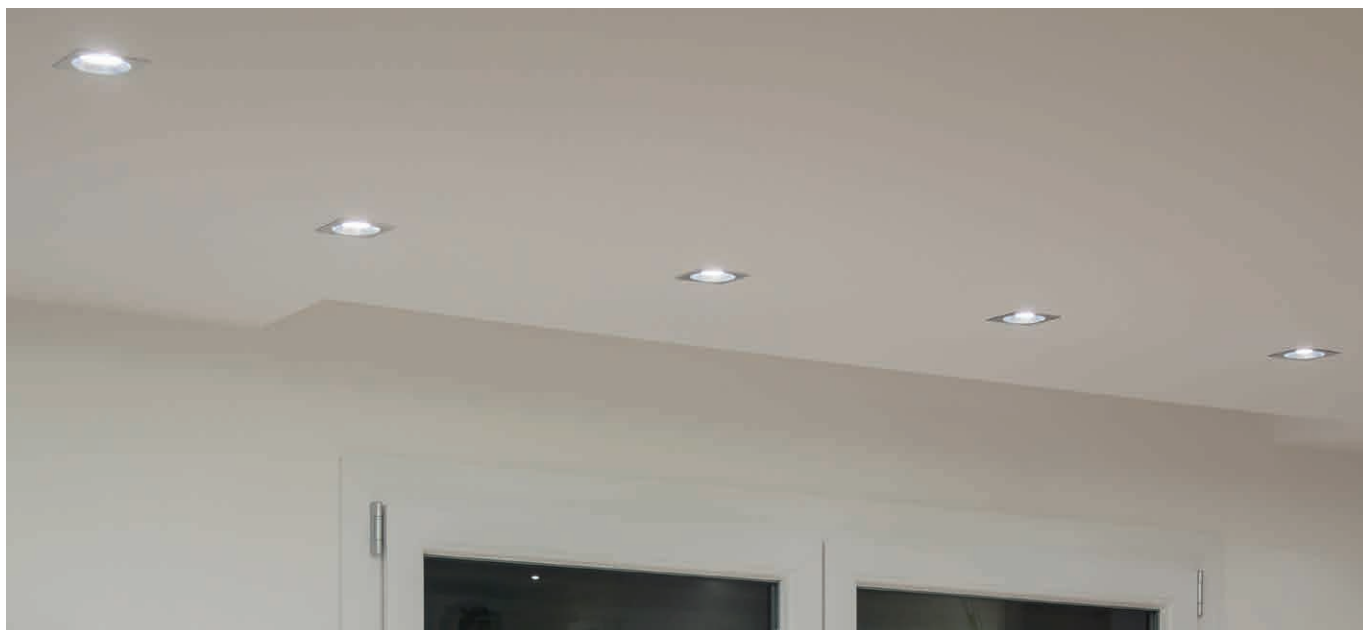

Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80

Power: 4W@350mA – 8W@500mA

Lumen: 540Lm@350mA – 864Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L25.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LIGHT BEAM

- ☒ **10** 10°
- ☐ **35** 35°
- ☐ **60** 60°
- ☐ **80** 80°

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K
- ☐ **BL** Blue
- ☐ **VE** Green
- ☐ **RO** Red
- ☐ **AM** "Wine" Amber



Approved by
CIVC

POWER

- 3 4x1W - 350mA - 540 lm**
- 5 4x2W - 500mA - 864 lm**

Code example:

FOUR HOLE Q + White + 80° light beam + 3000K + 4W = Code: L25.180BC3

EGO METAL

L04.



Directional metal recessed light with COB LEDs CRI>90 for primary lighting in residential and retail environments. Choice of secondary optics. Can be flush fitted indoors, spring-mounted

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA

200mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

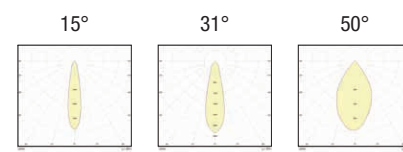

BASIC CODES

L04.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium
- ☐ **9** Polished gold

LIGHT BEAM

- ☒ **15** 15°
- ☐ **31** 31°
- ☐ **50** 50°

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

EGO METAL + Brushed Aluminium + 15° light beam + 2700K = Code: L04.715CC

EGO METAL Q

L05.



Directional square recessed light with COB LEDs CRI>90 for primary lighting in residential and retail environments. Choice of secondary optics. Can be flush fitted indoors, spring-mounted

COB LED CRI>90

Power: 7W@200mA


Lumen: 916Lm@200mA

200mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

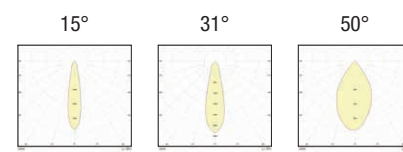

BASIC CODES

L05.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium
- ☐ **9** Polished gold

LIGHT BEAM

- ☒ **15** 15°
- ☐ **31** 31°
- ☐ **50** 50°

LED COLOUR


- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

EGO METAL Q + Brushed Aluminium + 15° light beam + 2700K = Code: L05.715CC

REMOVE PLUS

L15P.

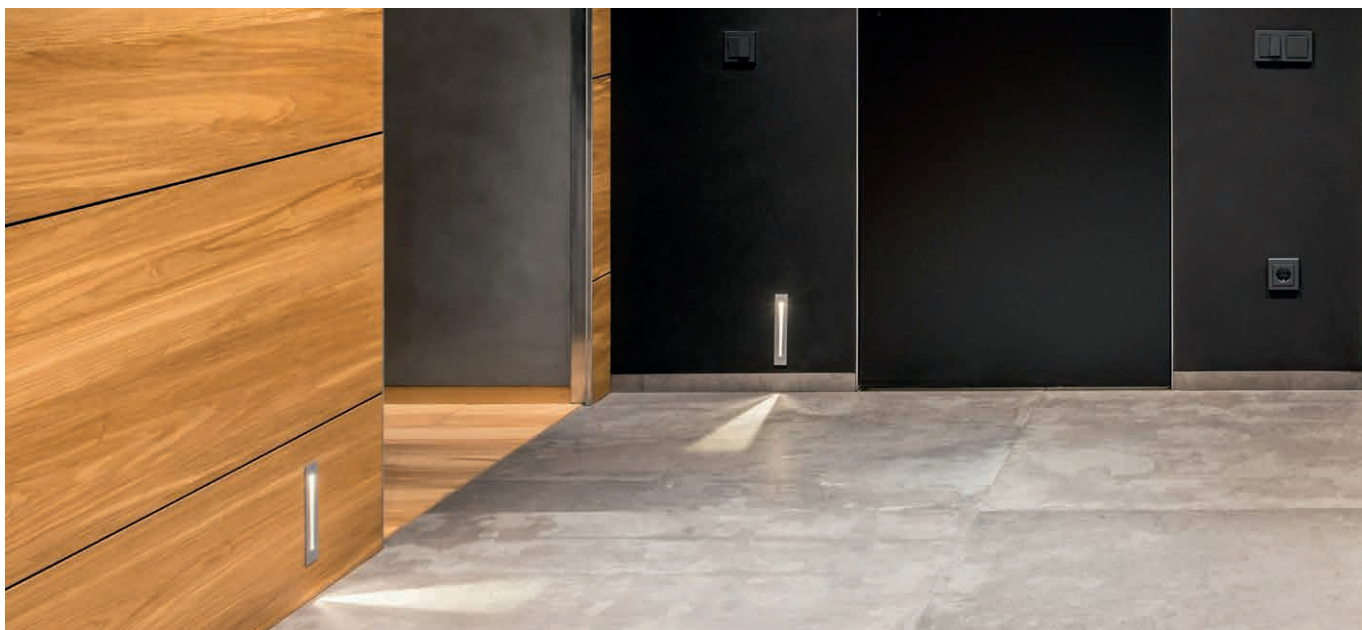

Flush-fitted in polished aluminium for accent, decoration and courtesy or emergency lighting. Even, diffuse lighting, can be installed indoors or outdoors. Mounting on plasterboard or brickwork with formwork.

SMD LED CRI>85

Power: 0.7W@24Vdc

Lumen: 100Lm@24Vdc

Constant voltage supply 24Vdc

Parallel connection, 50 cm cable


Constant voltage power supplies page 237

Installation accessories page 272


Dimming Accessories page 249



 **MADE IN ITALY**

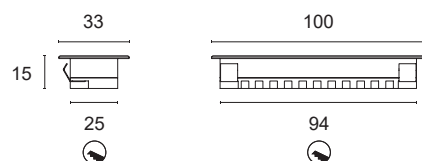

120°



BASIC CODES

L15P.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

REMOVE PLUS + Brushed aluminium + 3000K = Code: L15P.7BC

REMOVE MINUS

L15S.



Flush-fitted in polished aluminium for accent, decoration and courtesy or emergency lighting. Diffuse lighting, can be installed indoors, on plasterboard or brick with formwork.

SMD LED CRI>90

Power: 1.8W@24Vdc

Lumen: 135Lm@24Vdc

Constant 24Vdc voltage supply


Parallel connection, 50 cm cable

Constant voltage power supplies page 237


Installation accessories page 272

Dimming Accessories page 249

 **MADE IN ITALY**

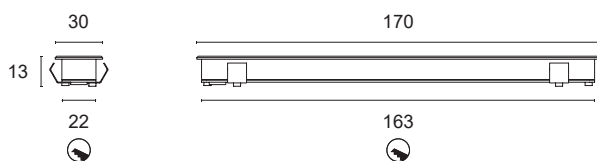

120°



BASIC CODES

L15S.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

REMOVE MINUS + Brushed aluminium + 3000K = Code: L15S.7BC

PAD L13Q.



Polished aluminium recessed light for primary lighting in small rooms and accessories. Also suitable as a step marker or emergency light. Even, diffuse lighting, can be installed indoors.
Mounting with pressure springs or with formwork for plasterboard or masonry.

MID POWER LED CRI>80

Power: 3W@12Vdc

Lumen: 459Lm@12Vdc

Constant 12Vdc voltage supply



Parallel connection, 50 cm cable

Constant voltage power supplies page 236

Installation accessories page 271

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

L13Q.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LED COLOUR


- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

PAD + White + 3000K = Code: L13Q.1BC

ERMA

L13.

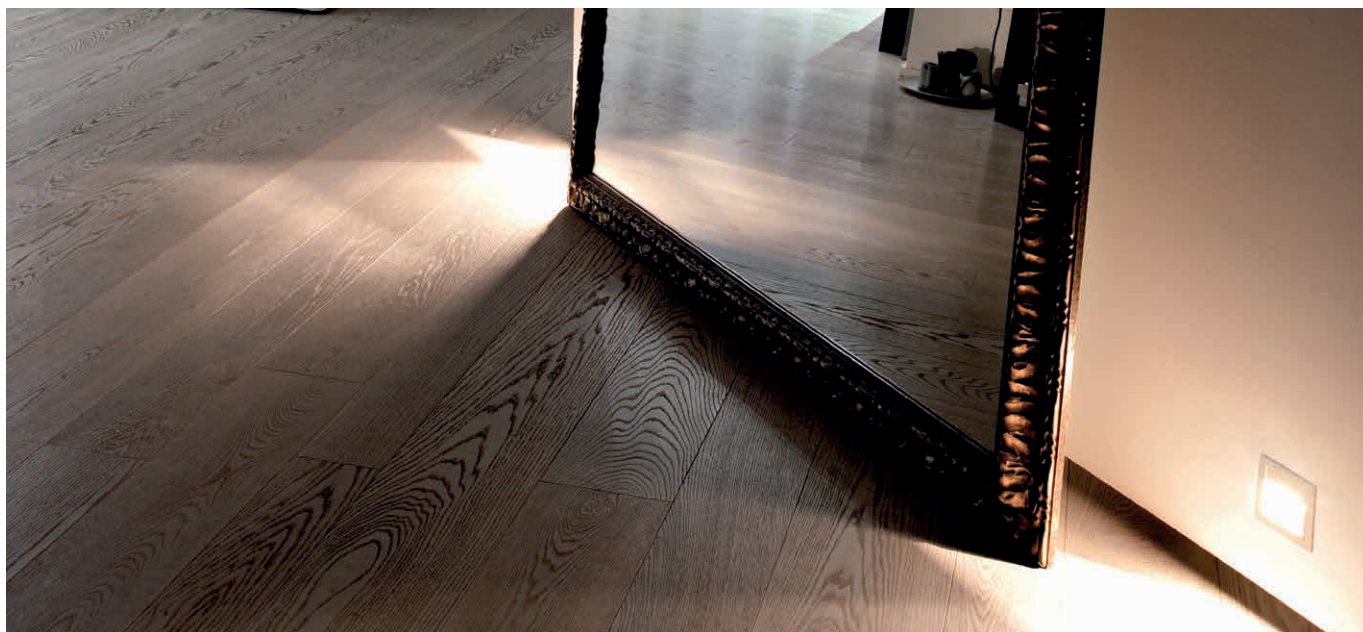

Flush-fitted in thermoplastic for accent and courtesy lighting. Also suitable as a step marker or emergency light. Even, diffuse lighting, can be installed indoors on plasterboard or brick with standard 503 formwork (not included).

MID POWER LED CRI>80

Power: 1.5W@12Vdc

Lumen: 100lm@12Vdc

Mains power supply included



Parallel connection, 20 cm cable

Constant voltage power supplies page 236

Dimming Accessories page 249



 **MADE IN ITALY**

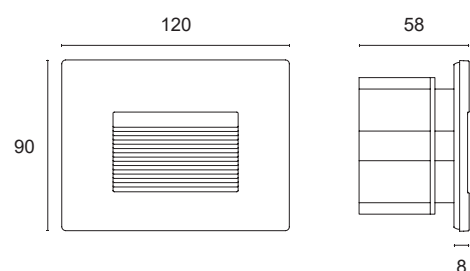

BASIC CODES

L13.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K

Code example:

ERMA + White + 4000K = Code: L13.1BN





INDOOR AND OUTDOOR RECESSED LIGHTS

REMOVE PLUS WP	62
HOLLY	63
HALISSA	64
MEMO	65
DEHO 2	66
DEHO 3	67
DEHO 4	68
DEHO 5	69
DEHO Q	70
DARDO 2	71
DARDO 3	72
DARDO Q	73
ACSO 1	74
ACSO 2	75
ACSO 3	76
ACRUX 1	77

REMOVE PLUS WP

L15P.WP



Flush-fitted in polished aluminium for accent, decoration and courtesy or emergency lighting. Even, diffuse lighting, can be installed indoors or outdoors. Mounting on plasterboard or brickwork with formwork.

SMD LED CRI>85

Power: 0.7W@24Vdc

Lumen: 100Lm@24Vdc

Constant voltage supply 24Vdc

Parallel connection, 50 cm cable


Constant voltage power supplies page 237

Installation accessories page 272


Dimming Accessories page 249



 **MADE IN ITALY**

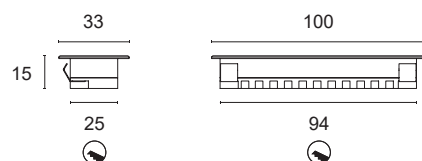

120°



BASIC CODES

L15P.WP

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium

LED COLOUR


- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

REMOVE PLUS WP + Brushed aluminium + 3000K = Code: L15P.WP7BC

HOLLY

L30R.

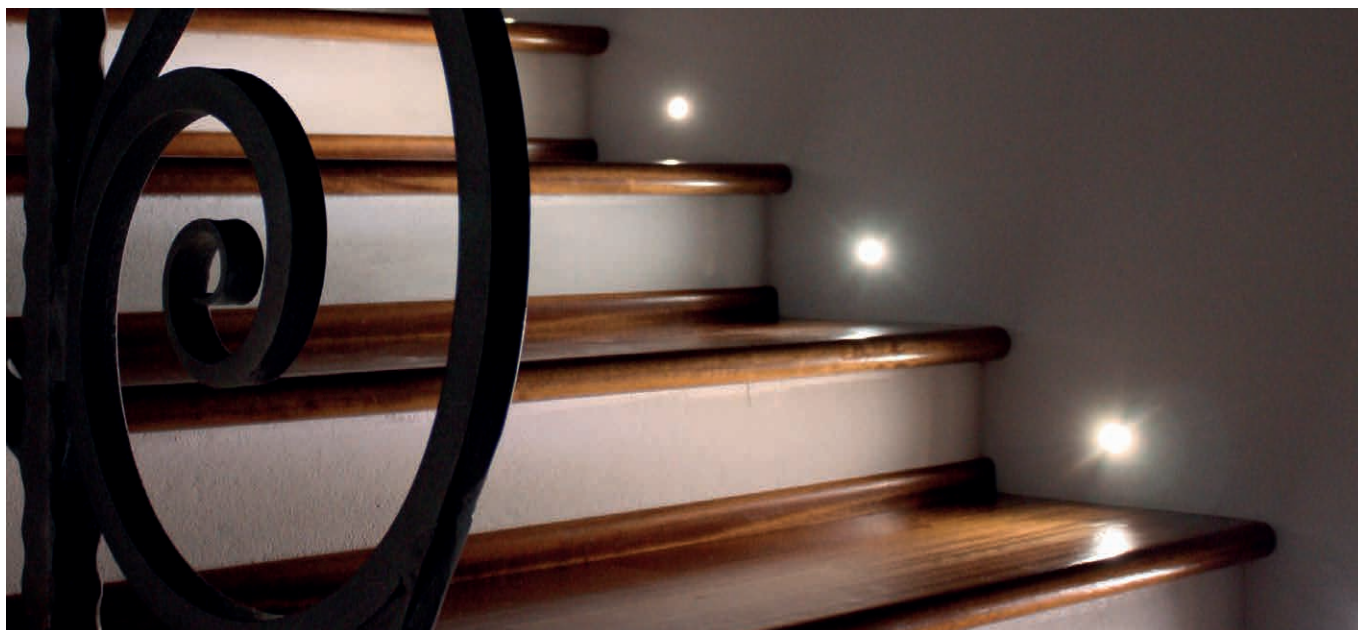

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork.

Power LED CRI>80

Power: 1W@350mA

Lumen: 135Lm@350mA

350mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232

Installation accessories page 270

Dimming Accessories page 249

MADE IN ITALY

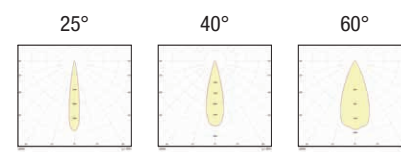

BASIC CODES

L30R.

LIGHT BEAM

- ▲ 25 25°
- ▲ 40 40°
- ▲ 60 60°

GLASS

- T Transparent
- S Brushed

LED COLOUR

- BN 4000K
- BC 3000K
- CC 2700K
- BL Blue
- VE Green
- RO Red
- AM "Wine" Amber




Approved by
CIVC

Code example:

HOLLY + Light beam 25° + Transparent glass + 3000K = Code: L30R.25TBC

HALISSA

L30Q.

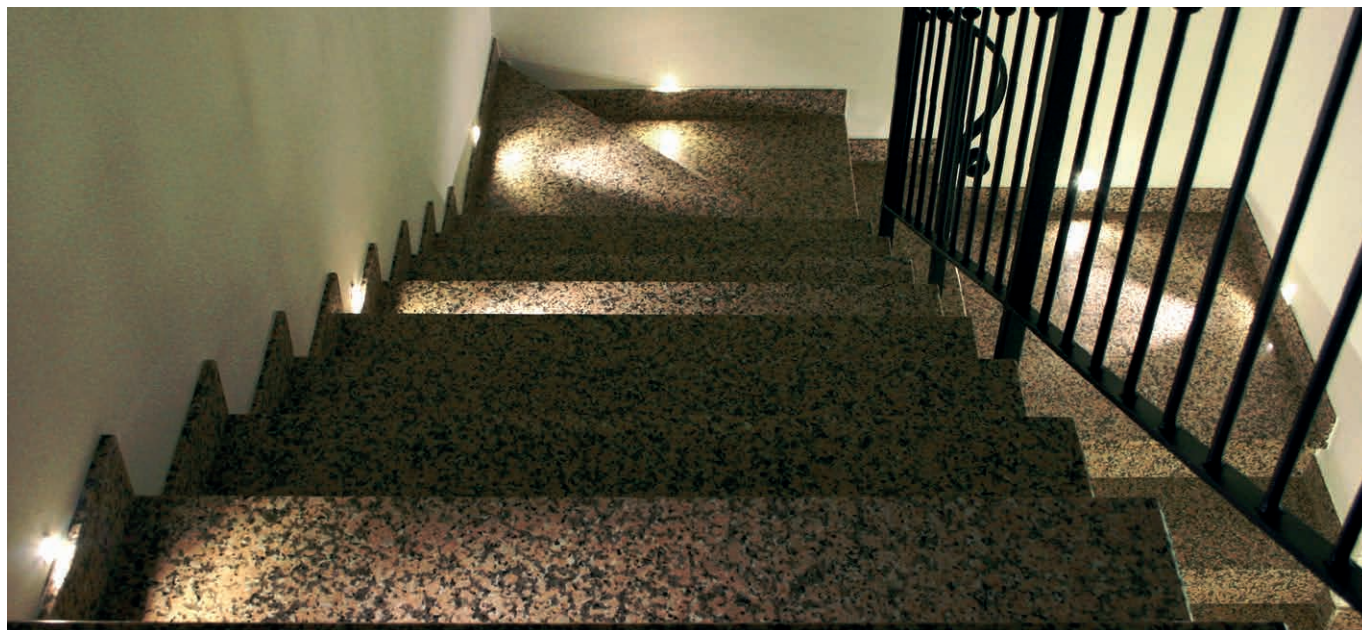

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork.

Power LED CRI>80

Power: 1W@350mA

Lumen: 135Lm@350mA

350mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232

Installation accessories page 270

Dimming Accessories page 249

MADE IN ITALY

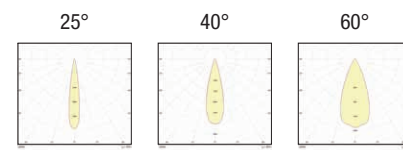

BASIC CODES

L30Q.

LIGHT BEAM

-  **25** 25°
-  **40** 40°
-  **60** 60°

GLASS

-  **T** Transparent
-  **S** Brushed

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber




Approved by
CIVC

Code example:

HALISSA + Light beam 25°+ Transparent glass + 3000K = Code: L30Q.25TBC

MEMO

L30S.

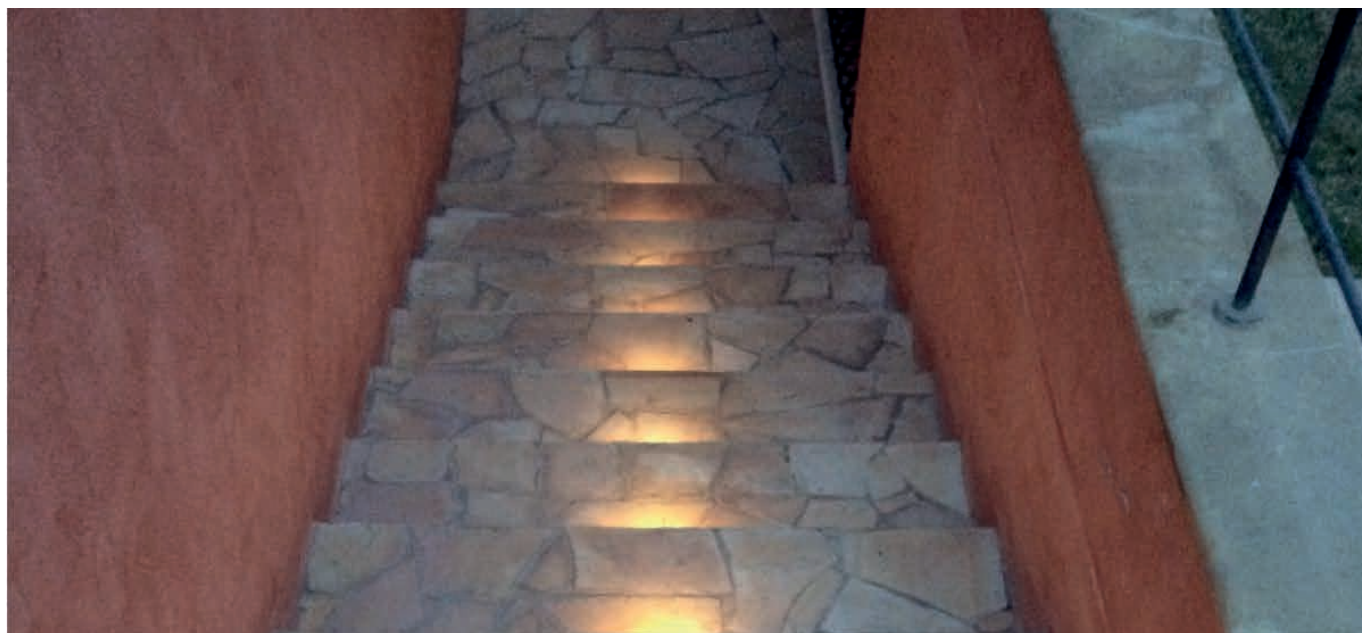

Flush-fitted in polished 304 stainless steel with power LED for decoration, courtesy or step marker lighting. Diffuse lighting with anti-glare cowling. Can be fitted in the wall or floor, indoors and outdoors. Mounting with formwork.

Power LED CRI>80

Power: 1W@350mA

Lumen: 135Lm@350mA

350mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232

Installation accessories page 270

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

L30S.

LIGHT BEAM

 **R1** Radial 1 aperture

GLASS

 **T** Transparent

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Approved by
CIVC

Code example:

MEMO + Radial light beam 1 aperture + Clear glass + 3000K = Code: L30S.R1TBC

DEHO 2

L402.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



Constant current power supplies page 232-233

Installation accessories page 271

Dimming Accessories page 249



 **MADE IN ITALY**

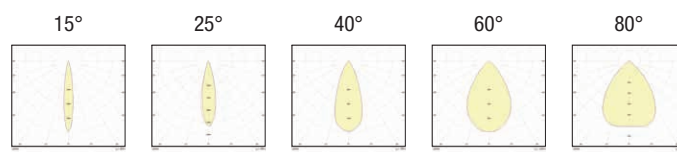

BASIC CODES

L402.

LIGHT BEAM

	15°
	25°
	40°
	60°
	80°

GLASS

	T Transparent
	S Brushed

LED COLOUR

	BN 4000K
	BC 3000K
	CC 2700K
	BL Blue
	VE Green
	RO Red
	AM "Wine" Amber

POWER

3 1x1W - 350mA - 135 lm
5 1x2W - 500mA - 216 lm



Approved by
CIVC

Code example:

DEHO 2 + Light Beam 25° + Clear Glass + 3000k +1W = Code: L402.25TBC3

DEHO 3

L403.



Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233

Installation accessories page 271

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L403.

LIGHT BEAM

 **R1** Radial 1 aperture

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K
 **BL** Blue
 **VE** Green
 **RO** Red
 **AM** "Wine" Amber



POWER


3 1x1W - 350mA - 135 lm
5 1x2W - 500mA - 216 lm

Code example:

DEHO 3 + radial light beam 1 aperture + 3000K + 1W = Code: L403.R1BC3

DEHO 4

L404.

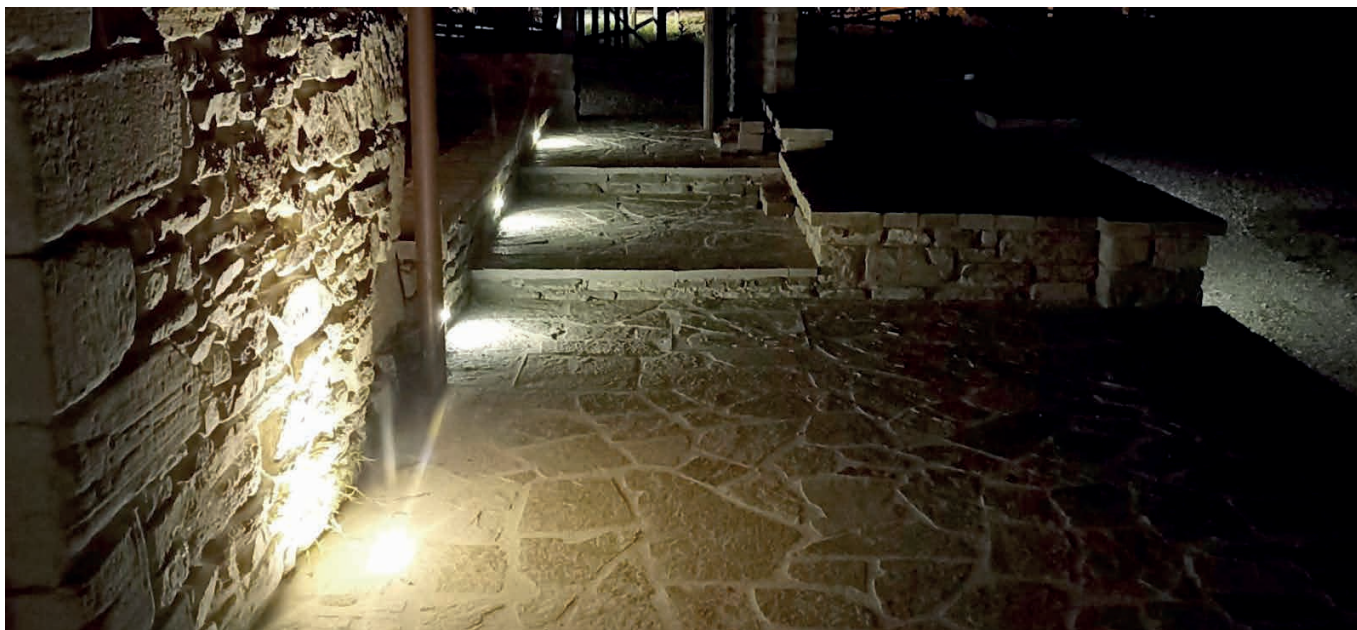

Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233

Installation accessories page 271

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L404.

LIGHT BEAM

 **R5** Radial 5 apertures

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K
 **BL** Blue
 **VE** Green
 **RO** Red
 **AM** "Wine" Amber



POWER

3 1x1W - 350mA - 135 lm
5 1x2W - 500mA - 216 lm

Code example:

DEHO 4 + radial light beam 5 apertures + 3000K + 1W = Code: L404.R5BC3

DEHO 5

L402B



Flush-fitted in polished 304 stainless steel for decoration, courtesy and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233

Installation accessories page 271

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L402B.

LIGHT BEAM

 **R2** Radial 2 apertures

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K
 **BL** Blue
 **VE** Green
 **RO** Red
 **AM** "Wine" Amber



POWER

3 1x1W - 350mA - 135 lm
5 1x2W - 500mA - 216 lm

Code example:

DEHO 5 + radial light beam 2 apertures + 3000K + 1W = Code: L402B.R2BC3

DEHO Q

L405.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135Lm@350mA - 216Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233

Installation accessories page 271

Dimming Accessories page 249

MADE IN ITALY

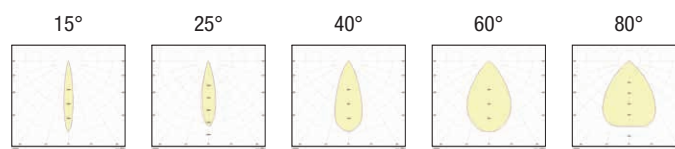

BASIC CODES

L405.

LIGHT BEAM

	15	15°
	25	25°
	40	40°
	60	60°
	80	80°

GLASS

	T Transparent
	S Brushed

LED COLOUR

	BN 4000K
	BC 3000K
	CC 2700K
	BL Blue
	VE Green
	RO Red
	AM "Wine" Amber



Approved by
CIVC

POWER


3	1x1W - 350mA - 135 lm
5	1x2W - 500mA - 216 lm

Code example:

DEHO Q + Light Beam 25° + Clear Glass 3000k +1W = Code: L405.25TBC3

DARDO 2

L502.

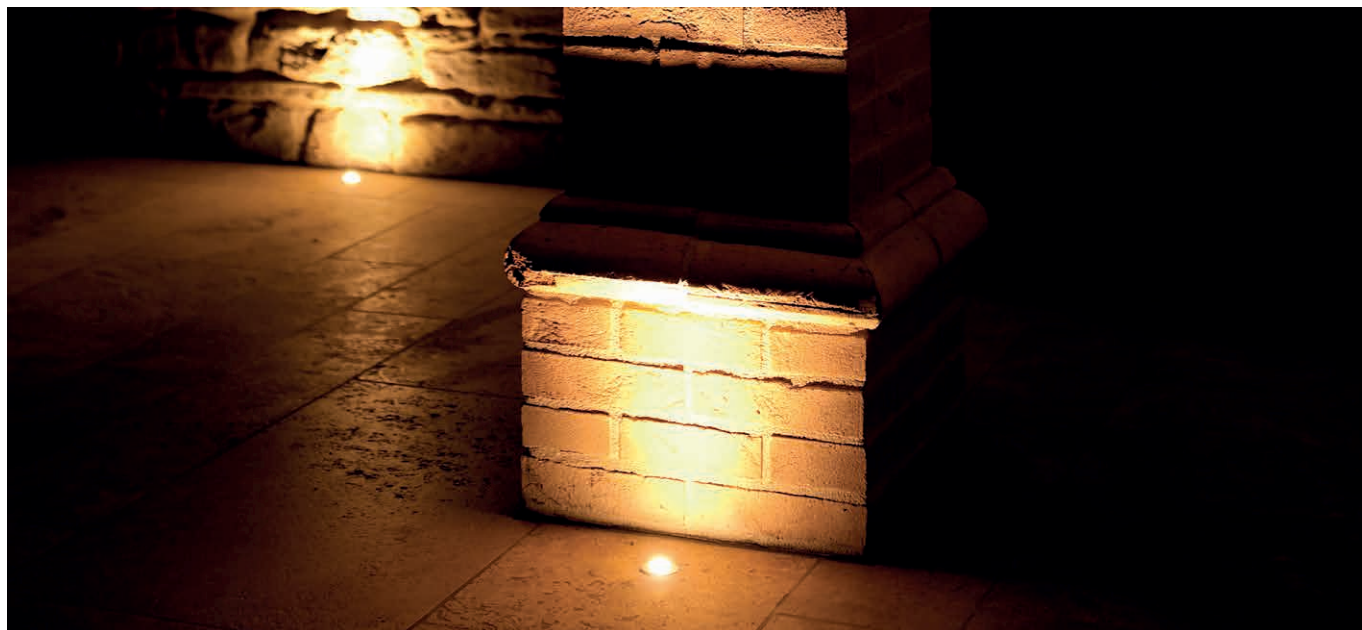

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405lm@350mA - 648lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233

Installation accessories page 271

Dimming Accessories page 249

 **MADE IN ITALY**

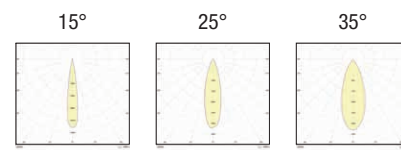

BASIC CODES

L502.

LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **35** 35°

GLASS

-  **T** Transparent
-  **S** Brushed

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Approved by
CIVC

POWER

- 3 3x1W - 350mA - 405 lm**
- 5 3x2W - 500mA - 648 lm**

Code example:

DARDO 2 + Light Beam 2=15° + Clear Glass 3000k +3W = Code: L502.15TBC3

DARDO 3

L503.



Flush-fitted in polished 304 steel with powerful LEDs suitable for decorative lighting and as step markers. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405Lm@350mA - 648Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233

Installation accessories page 271

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L503.

LIGHT BEAM

 **R5** Radial 5 apertures

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K
 **BL** Blue
 **VE** Green
 **RO** Red
 **AM** "Wine" Amber



POWER

3 3x1W - 350mA - 405 lm
5 3x2W - 500mA - 648 lm

Code example:

DARDO 3 + radial light beam 5 apertures + 3000K + 3W = Code: L503.R5BC3

DARDO Q

L504.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405Lm@350mA - 648Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233

Installation accessories page 271

Dimming Accessories page 249

MADE IN ITALY

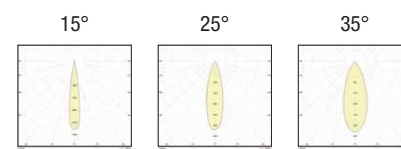

BASIC CODES

L504.

LIGHT BEAM

- 15 15°
- 25 25°
- 35 35°

GLASS

- T Transparent
- S Brushed

LED COLOUR

- BN 4000K
- BC 3000K
- CC 2700K
- BL Blue
- VE Green
- RO Red
- AM "Wine" Amber



Approved by
CIVC

POWER

- 3 3x1W - 350mA - 405 lm
- 5 3x2W - 500mA - 648 lm

Code example:

DARDO Q + Light Beam 15° + Clear Glass + 3000k +3W = Code: L504.15TBC3

ACSO 1

L601.



Polished 304 steel recessed light with power LEDs for primary floor lighting of green areas and architectural facades.
Choice of secondary optics. Can be flush fitted indoors and outdoors
Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 4W@350mA - 8W@500mA

Lumen: 540lm@350mA - 864lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233

Installation accessories page 270

Dimming Accessories page 249

 **MADE IN ITALY**

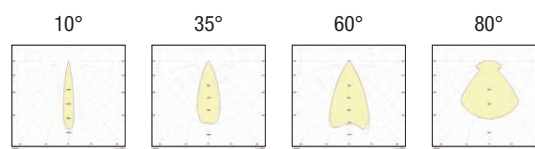

BASIC CODES

L601.

LIGHT BEAM

	10	10°
	35	35°
	60	60°
	80	80°

GLASS

	T Transparent
	S Brushed

LED COLOUR

	BN 4000K
	BC 3000K
	CC 2700K
	BL Blue
	VE Green
	RO Red
	AM "Wine" Amber



Approved by
CIVC

POWER

3	4x1W - 350mA - 540 lm
5	4x2W - 500mA - 864 lm

Code example:

ACSO 1 + Light Beam 35° + Clear Glass + 4000k +4W = Code: L601.35TBN3

ACSO 2

L602.



Flush-fitted in polished 304 stainless steel with power LED for accent and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 4W@350mA - 8W@500mA

Lumen: 540lm@350mA - 864lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233

Installation accessories page 270

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L602.

LIGHT BEAM

 **R4** Radial 4 apertures

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



POWER

3 4x1W - 350mA - 540 lm
5 4x2W - 500mA - 864 lm

Code example:

ACSO 2 + radial light beam 4 apertures + 3000K + 4W = Code: L602.R4BC3

ACSO 3

L603.



Flush-fitted in polished 304 stainless steel with power LED for accent or step marker lighting. Asymmetrical optics. Can be fitted in the floor indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 1W@350mA - 2W@500mA

Lumen: 135lm@350mA - 216lm@500mA


350mA - 500mA constant current power supply

Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233

Installation accessories page 270


Dimming Accessories page 249



 **MADE IN ITALY**



40°



BASIC CODES

L603.

LIGHT BEAM

 **40** 40° Asymmetric

GLASS

 **T** Transparent

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Approved by
CIVC

POWER


3 1x1W - 350mA - 135 lm
5 1x2W - 500mA - 216 lm

Code example:

ACSO 3 + Light Beam 40° + Clear Glass 3000k + 1W = Code: L603.40TBC3

ACRUX 1

L701.

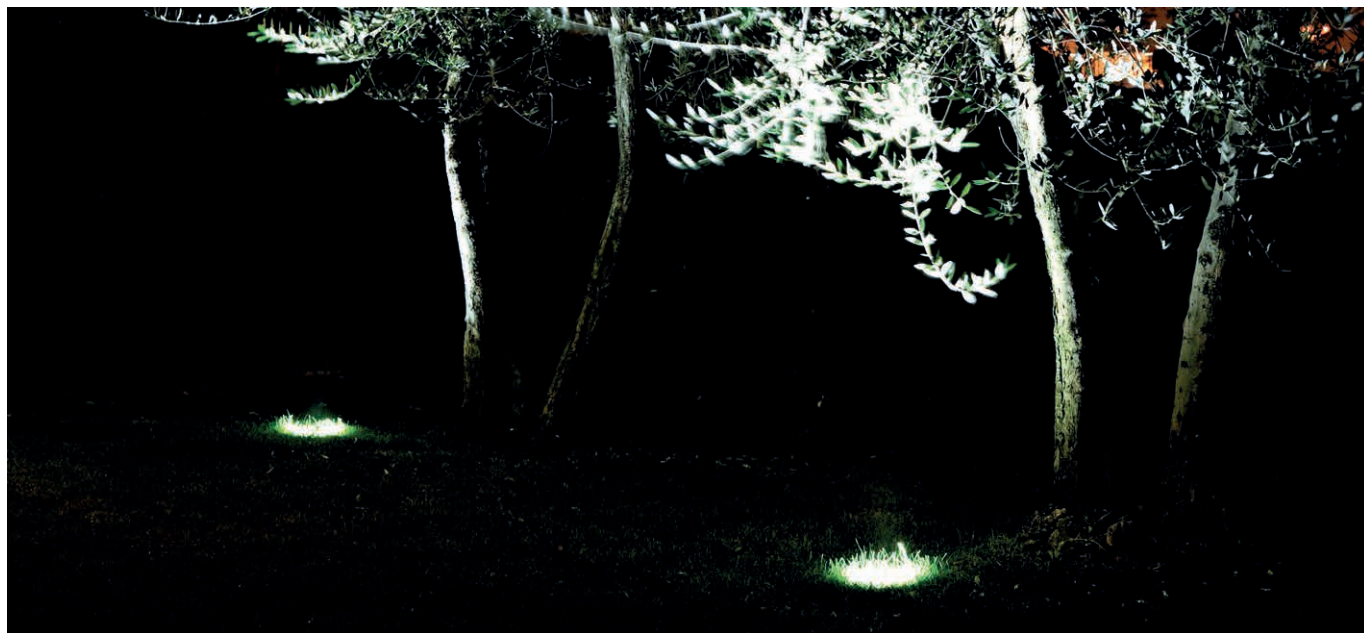

Turned 304 steel recessed light with COB LEDs for primary floor lighting of green areas and architectural facades. Choice of secondary optics. Can be flush fitted indoors and outdoors Mounting with formwork or ring with springs.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA

200mA constant current power supply

Series connection, 50 cm cable



Constant voltage power supplies p. 234

Installation accessories page 270

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L701.

LIGHT BEAM

 **12** 12°
 **24** 24°

GLASS

 **T** Transparent
 **S** Brushed

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K

Code example:

ACRUX 1 + Light Beam 12° + Clear Glass + 4000k = Code: L701.12TBC



316 L RECESSED LIGHTS

DEHO 1 L	80
DEHO 1 L Q	81
DEHO 2 L	82
DEHO 3 L	83
DEHO 4 L	84
DEHO 5 L	85
DEHO Q L	86

DEHO 1 L

L41L.



Recessed with heat sink and turned 316L stainless steel ring, WICOP LED for diffused accent, decoration, courtesy or step marker lighting. Opal diffuser. Can be fitted in the floor and on the wall indoors and outdoors, mounting with formwork.

WICOP LED CRI>80

Power: 2W@12Vdc

Lumen: 216Lm@12Vdc

Constant 12Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 236

Installation accessories page 271

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L41L.

LED COLOUR


- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

DEHO 1 L + 4000K = Code: L41L.BN

DEHO 1 L Q

L41LQ.

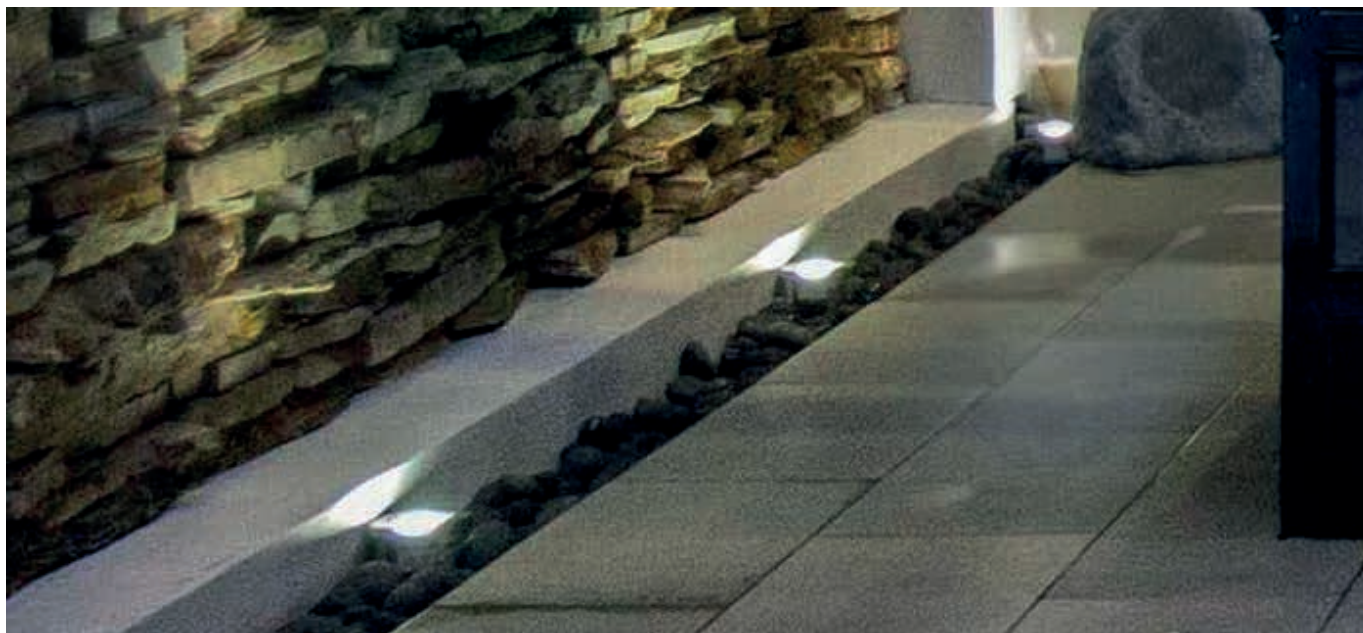

Recessed with heat sink and turned 316L stainless steel ring, WICOP LED for diffused accent, decoration, courtesy or step marker lighting. Opal diffuser. Can be fitted in the floor and on the wall indoors and outdoors, mounting with formwork.

WICOP LED CRI>80

Power: 2W@12Vdc

Lumen: 216Lm@12Vdc

Constant 12Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 236

Installation accessories page 271

Dimming Accessories page 249



 **MADE IN ITALY**



BASIC CODES

L41LQ.

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:

DEHO 1 L Q + 4000K = Code: L41LQ.BN

DEHO 2 L

L402L.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 1.6W@24Vdc

Lumen: 132Lm@24Vdc

Constant 24Vdc voltage supply



Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Installation accessories page 271

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

L402L.

LIGHT BEAM

-  **25** 25°
-  **40** 40°

GLASS

-  **T** Transparent
-  **S** Brushed

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K

Code example:

DEHO 2 L+ Light Beam 25° + Clear Glass + 3000k = Code: L402L.25TBC

DEHO 3 L

L403L.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy and step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 1.6W@24Vdc

Lumen: 132Lm@24Vdc

Constant 24Vdc voltage supply


Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Installation accessories page 271

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

L403L.

LIGHT BEAM

 **R1** Radial 1 aperture

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K



Code example:

DEHO 3 L + radial light beam 1 aperture + 3000K = Code: L403L.R1BC

DEHO 4 L

L404L.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy and step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 1.6W@24Vdc

Lumen: 132Lm@24Vdc

Constant 24Vdc voltage supply

Parallel connection, 50 cm cable

Constant voltage power supplies page 237


Installation accessories page 271

Dimming Accessories page 249

 **MADE IN ITALY**



Ø32



Ø44

BASIC CODES

L404L.

LIGHT BEAM

 **R5** Radial 5 apertures

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K



Code example:

DEHO 4 L + radial light beam 5 aperture + 3000K = Code: L404L.R5BC

DEHO 5 L

L402BL.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy and step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 1.6W@24Vdc

Lumen: 132Lm@24Vdc

Constant 24Vdc voltage supply


Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Installation accessories page 271

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

L402BL.

LIGHT BEAM

 **R2** Radial 2 apertures

LED COLOUR

☐ **BN** 4000K
☒ **BC** 3000K
☐ **CC** 2700K



Code example:

DEHO 5 L + radial light beam 2 apertures + 3000K = Code: L402BL.R2BC

DEHO Q L

L405L.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 1.6W@24Vdc

Lumen: 132Lm@24Vdc

Constant 24Vdc voltage supply



Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Installation accessories page 271

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

L405L.

LIGHT BEAM

-  **25** 25°
-  **40** 40°

GLASS

-  **T** Transparent
-  **S** Brushed

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K

Code example:

DEHO Q L+ Light Beam 25° + Clear Glass + 3000k = Code: L405L.25TBC





PROJECTORS

DUVAR	90
VERTIGO	91
ZEPPELIN	92

DUVAR

L23.



Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for decorative, accent, courtesy and general lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base or stake.

Power LED CRI>80

Power: 3W@350mA - 6W@500mA

Lumen: 405Lm@350mA - 648Lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Installation accessories page 272

Dimming Accessories page 249

 **MADE IN ITALY**

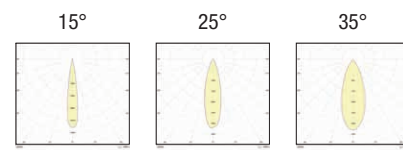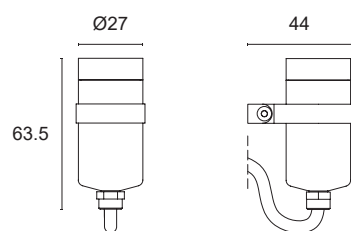

BASIC CODES

L23.

FINISHES

- **2** Matt black
- **7** Brushed aluminium

LIGHT BEAM

- **15** 15°
- **25** 25°
- **35** 35°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber



Approved by
CIVC

POWER

- 3 3x1W - 350mA - 405 lm**
- 5 3x2W - 500mA - 648 lm**

Code example:

DUVAR + Brushed Aluminium + 15° light beam + 4000K + 3W = Code: L23.715BN3

VERTIGO

L14.



Directional projector in anticorodal anodised or decorated aluminium with COB LEDs CRI>90. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.

Power LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA

200mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 234

Dimming Accessories page 249



 **MADE IN ITALY**

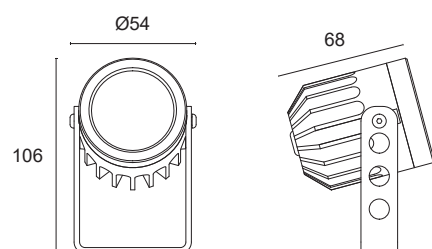

BASIC CODES

L14.

FINISHES

- **2** Matt black
- **7** Brushed aluminium

LIGHT BEAM

- **12** 12°
- **24** 24°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

- **10** 10°
- **35** 35°
- **60** 60°
- **80** 80°

- **AM** "Wine" Amber



Approved by
CIVC

- 3** 4x1W - 350mA
- 5** 4x2W - 500mA

Code example:

VERTIGO + Brushed Aluminium + 12° light beam + 4000K + 3W = Code: L14.712BN

ZEPPELIN

L06.



Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.

Power LED CRI>80

Power: 9W@350mA - 18W@500mA

Lumen: 1215lm@350mA - 1944lm@500mA

350mA - 500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 232-233

Dimming Accessories page 249



 **MADE IN ITALY**

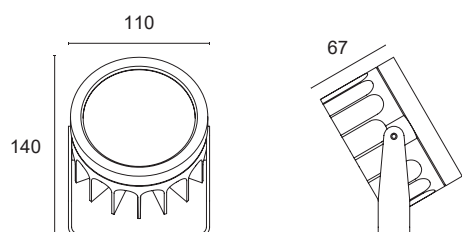

BASIC CODES

L06.

FINISHES

-  **2** Matt black
-  **7** Brushed aluminium

LIGHT BEAM

-  **10** 10°
-  **35** 35°
-  **60** 60°
-  **80** 80°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Approved by
CIVC

POWER

- 3 9x1W - 350mA - 1215 lm**
- 5 9x2W - 500mA - 1944 lm**

Code example:

ZEPPELIN + Matt black + Light beam 10° + 3000K + 9W = Code: L06.210BC3





DECORATIVE TECHNICAL LIGHTING

PIXEL 1	96
ROMY	97
SARY	98
ISA	99
LILLY	100
EVA	101
LINEA	102
QUADRA Q1	103
QUADRA Q2	104
QUADRA Q3	105
QUADRA Q4	106
QUADRA R1	107
QUADRA R2	108
QUADRA R3	109
REM	110
CISO P31 CEILING LIGHT	111
CISO P33 CEILING LIGHT	112
CISO P50 CEILING LIGHT	113
CISO P80 CEILING LIGHT	114
CISO S31 PENDANT LIGHT	115
CISO S33 PENDANT LIGHT	116
CISO S50 PENDANT LIGHT	117
CISO S80 PENDANT LIGHT	118
CEILING ROSES FOR OTHER CISO COMPOSITIONS	119

PIXEL 1

F10.



Directional lamp in polished, flexible aluminium suitable for reading, decoration or courtesy lighting. Choice of secondary optics, can be installed indoors. Screw mounting with base or on wall.

Power LED CRI>80

Power: 1W@350mA

Lumen: 135Lm@350mA

350mA constant current power supply


Constant current power supply included





 **MADE IN ITALY**



F10. base w/box



F10. flat base

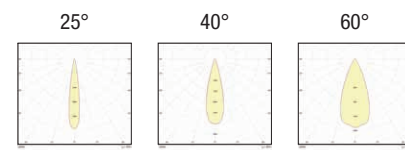

BASIC CODES

F10.

FINISHES

-  **6** Chrome
-  **7** Brushed aluminium

LIGHT BEAM

-  **25** 25°
-  **40** 40°
-  **60** 60°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Approved by
CIVC

BASE W/BOX AND SWITCH

- BX** without switch
- BB** with white switch
- BB** with black switch

FLAT BASE AND SWITCH

- PX** without switch
- PB** with white switch
- PN** with black switch

Code example:

PIXEL 1 + Brushed aluminium + Light beam 25° + 3000K + Flat base white switch = Code: F10.725BCPB

ROMY

ROMY.



Mirror lamp made entirely of decorated aluminium. Suitable for frame application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio.


LED SMD2835 CRI>90

Power: 16.8W/m




Lumen: 1900 - 2000 lm/m

Constant voltage supply 24Vdc

Power supply included and built in

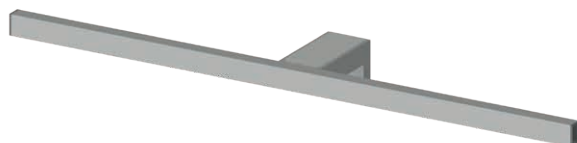

 **MADE IN ITALY**

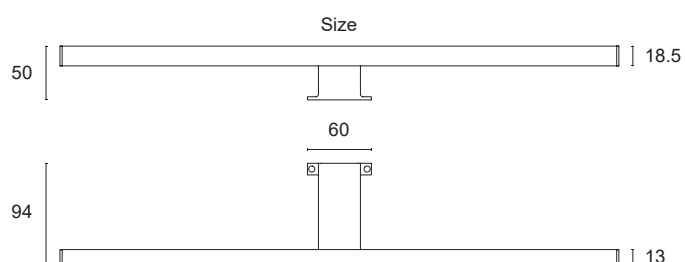

BASIC CODES

ROMY.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

SIZE

- A** 320mm 5W 660 lm
- B** 520mm 8W 1100 lm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

ROMY + Chrome + 320mm + 4000K = Code: Romy.6ABN



Mirror lamp made entirely of decorated aluminium. Suitable for frame application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio.


LED SMD2835 CRI>90

Power: 20.2W/m


Lumen: 2100 - 2500 lm/m

Constant voltage supply 24Vdc


Power supply included and remote

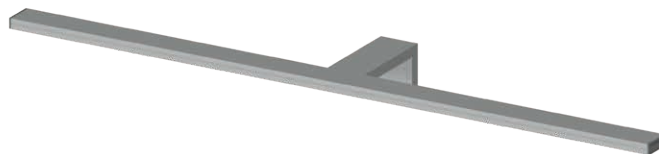

 **MADE IN ITALY**

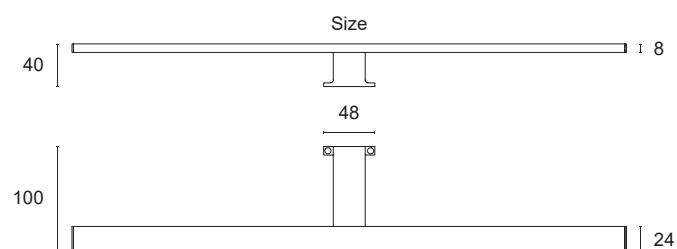

120°



BASIC CODES

SARY.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

SIZE

- A** 320mm 6W 750 lm
- B** 520mm 10W 1250 lm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

SARY + Chrome + 320mm + 4000K = Code: SARY.6ABN



Mirror lamp made entirely of decorated aluminium and steel. Suitable for wall application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio.

LED SMD2835 CRI>90

Power: 20.2W/m




Lumen: 2100 - 2500 lm/m

Constant voltage supply 24Vdc

Power supply included and built in



 **MADE IN ITALY**

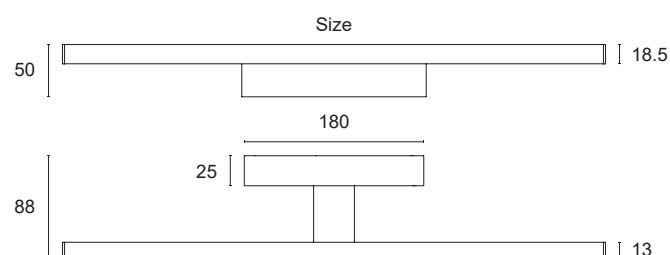

BASIC CODES

ISA.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium

SIZE

- A** 610mm 12W 1500 lm
- B** 810mm 16W 2000 lm
- C** 1010mm* 20W 2500 lm

*(chrome finish not available)

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

Code example:

ISA + Chrome + 610mm + 4000K = Code: ISA.6ABN



Mirror lamp made entirely of decorated aluminium. Suitable for application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio. Mounting with clips on mirror.

LED SMD2835 CRI>90

Power: 20.2W/m


Lumen: 2100 - 2500 lm/m

Constant voltage supply 24Vdc

Power supply included and remote



 **MADE IN ITALY**



BASIC CODES

LILLY.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium


SIZE

A 330mm 6W 780 lm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

120°



Code example:

LILLY + Chrome + 330mm + 4000K = Code: LILLY.6ABN

EVA

L33.



Dual-emission lamp in polished aluminium for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base.

Power LED CRI>80

Power: 2W+2W@500mA



Lumen: 216+216lm@500mA

500mA constant current power supply

Power supply included and built in.



 **MADE IN ITALY**

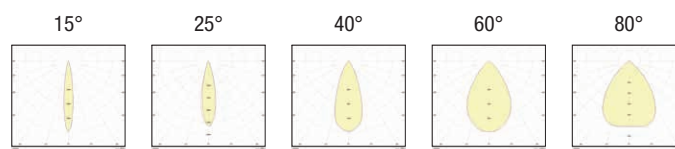

BASIC CODES

L33.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

1st LIGHT BEAM

- ☒ **15** 15°
- ☐ **25** 25°
- ☐ **40** 40°
- ☐ **60** 60°
- ☐ **80** 80°

2nd LIGHT BEAM

- ☒ **15** 15°
- ☐ **25** 25°
- ☐ **40** 40°
- ☐ **60** 60°
- ☐ **80** 80°

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K
- ☐ **BL** Blue
- ☐ **VE** Green
- ☐ **RO** Red
- ☐ **AM** "Wine" Amber




Code example:

EVA + Matt black + 1st light beam 15° + 2nd light beam 40° + 4000K = Code: L33.21540BN

LINEA

L1.

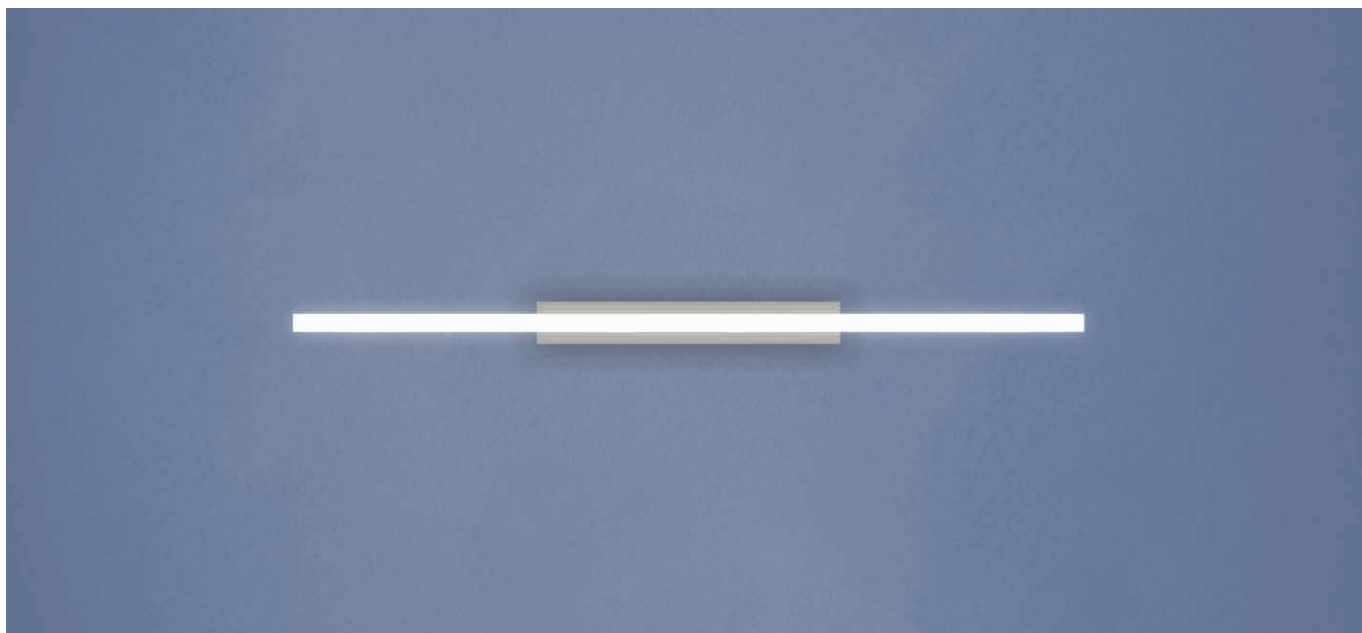

Linear ceiling lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90

Power: 20.2W/m



Lumen: 2100 - 2500 lm/m

Constant voltage supply 24Vdc

Power supply included and built in



 **MADE IN ITALY**

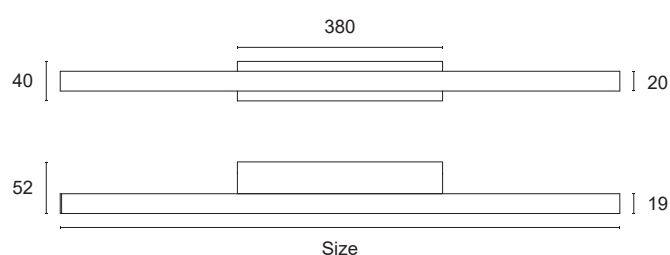

BASIC CODES

L1.

CEILING ROSE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

PROFILE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- F** 800mm 16W 2000 lm
- G** 930mm 19W 2325 lm
- H** 1010mm 20W 2525 lm
- I** 1220mm 24W 3050 lm
- L** 1480mm 30W 3700 lm
- M** 1810mm 36W 4525 lm
- N** 2020mm 40W 5050 lm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY


- ☐ **N** ON/OFF
- ☐ **P** PUSH
- ☐ **D** DALI

Code example:

LINEA + White ceiling rose + brushed aluminium profile + 1010mm + 4000K + Microprismatic diffuser + DALI = Code: L1.17HBNMD

QUADRA Q1

Q.QY1.

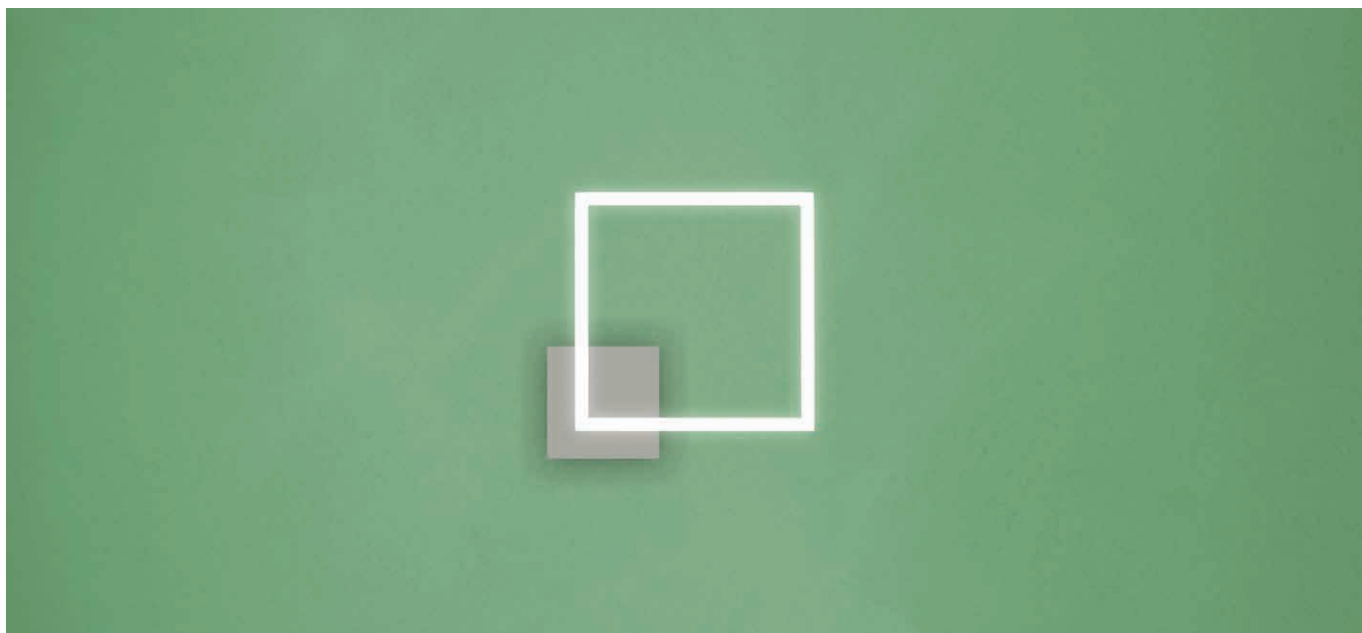

Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90

Power: 27W



Lumen: 3200 lm

Constant voltage supply 24Vdc

Power supply included and built in



 **MADE IN ITALY**



BASIC CODES

Q.QY1.

CEILING ROSE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

PROFILE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY

- ☒ **N** ON/OFF
- ☐ **P** PUSH
- ☐ **D** DALI

Code example:

QUADRA Q1 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY1.17BNMD

QUADRA Q2

Q.QY2.



Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90

Power: 40W


Lumen: 4800 lm

Constant voltage supply 24Vdc


Power supply included and built in



 **MADE IN ITALY**



120°



BASIC CODES

Q.QY2.

CEILING ROSE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

PROFILE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY


- ☒ **N** ON/OFF
- ☐ **P** PUSH
- ☐ **D** DALI

Code example:

QUADRA Q2 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY2.17BNMD

QUADRA Q3

Q.QY3.

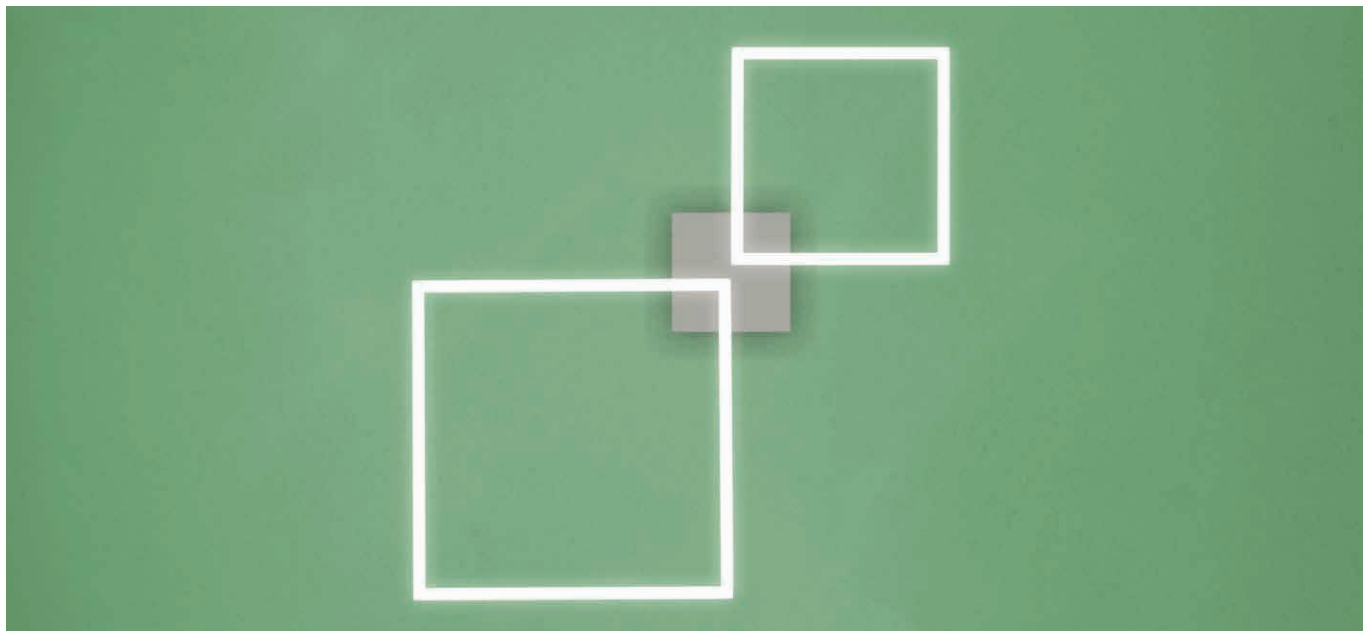

Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.


LED SMD2835 CRI>90

Power: 67W


Lumen: 8000 lm

Constant voltage supply 24Vdc


Power supply included and built in

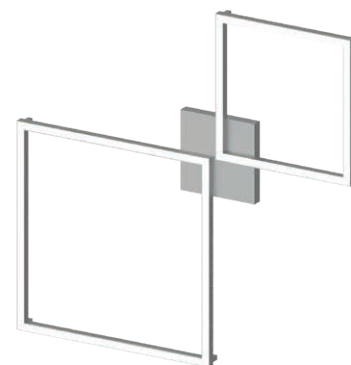

 **MADE IN ITALY**

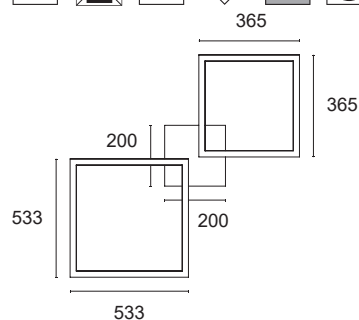

120°



BASIC CODES

Q.QY3.

CEILING ROSE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

PROFILE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY


- ☒ **N** ON/OFF
- ☐ **P** PUSH
- ☐ **D** DALI

Code example:

QUADRA Q3 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY3.17BNMD

QUADRA Q4

Q.QY4.

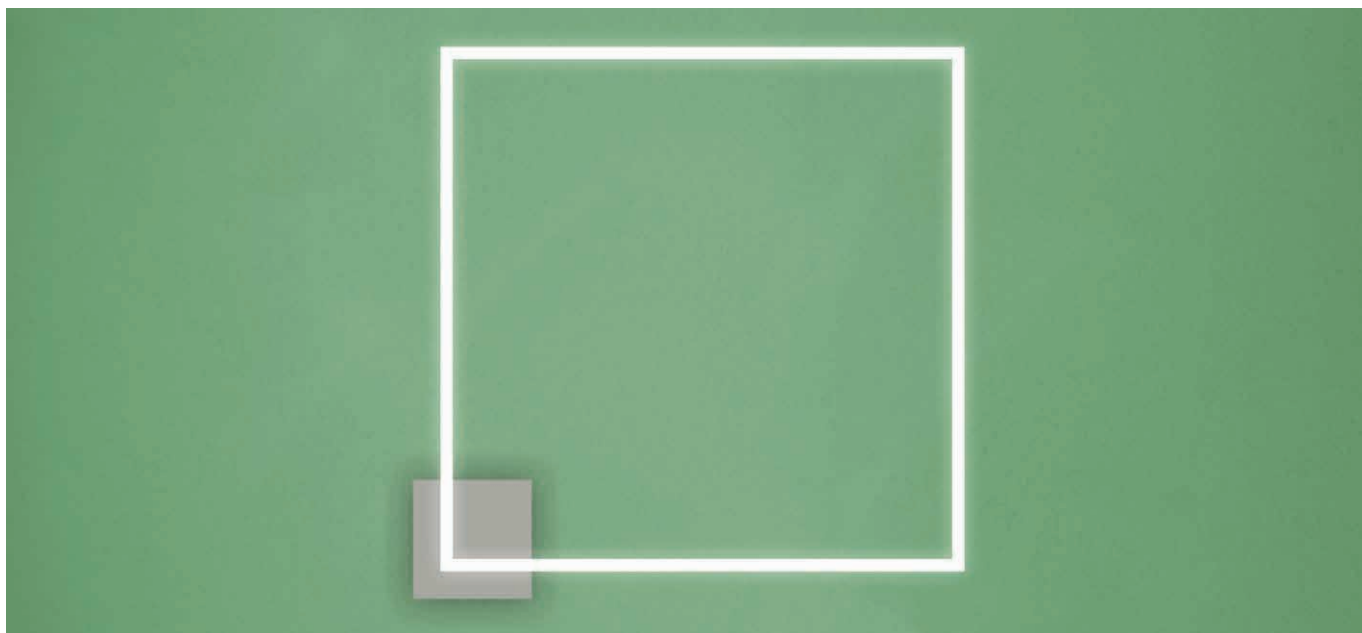

Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.


LED SMD2835 CRI>90

Power: 67W


Lumen: 8000 lm

Constant voltage supply 24Vdc


Power supply included and built in

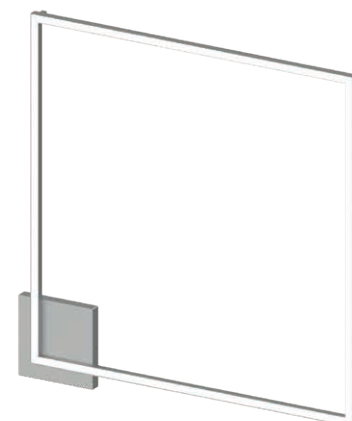


 **MADE IN ITALY**



867



120°



BASIC CODES

Q.QY4.

CEILING ROSE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

PROFILE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY


- ☒ **N** ON/OFF
- ☐ **P** PUSH
- ☐ **D** DALI

Code example:

QUADRA Q4 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY4.17BNMD

QUADRA R1

Q.RY1.

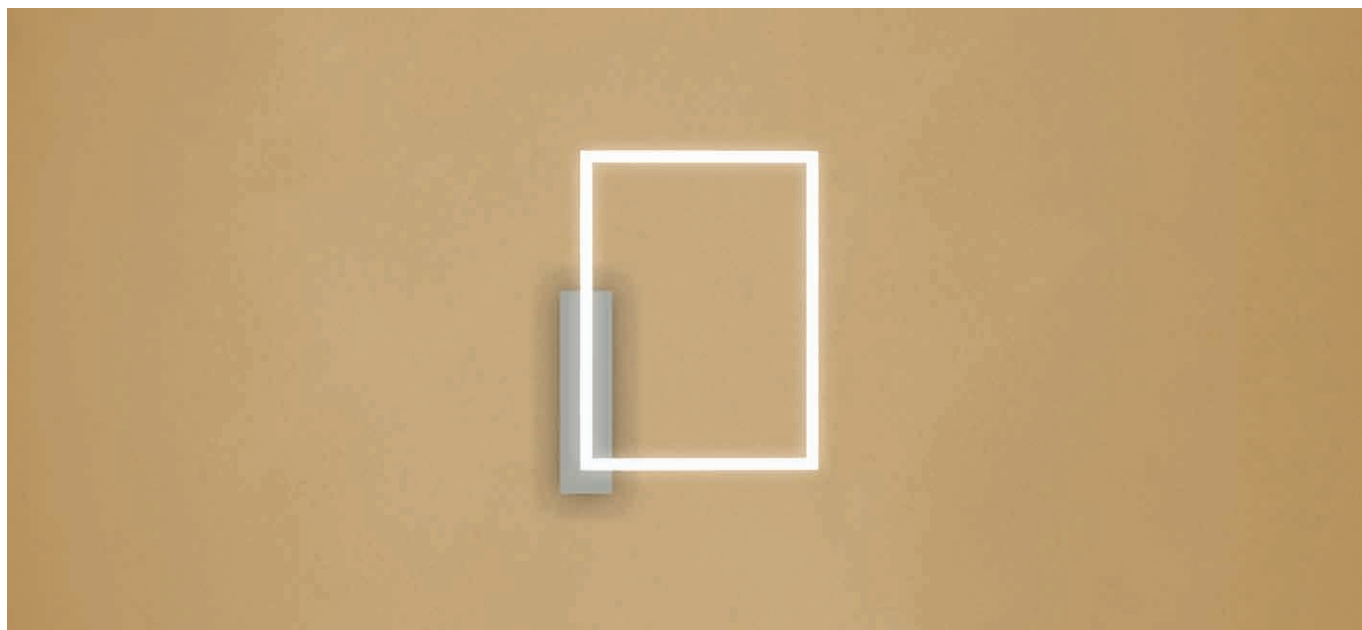

Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.


LED SMD2835 CRI>90

Power: 33W


Lumen: 4000 lm

Constant voltage supply 24Vdc


Power supply included and built in



 **MADE IN ITALY**



120°



BASIC CODES

Q.RY1.

CEILING ROSE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

PROFILE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY


- ☒ **N** ON/OFF
- ☐ **P** PUSH
- ☐ **D** DALI

Code example:

QUADRA R1 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.RY1.17BNMD

QUADRA R2

Q.RY2.

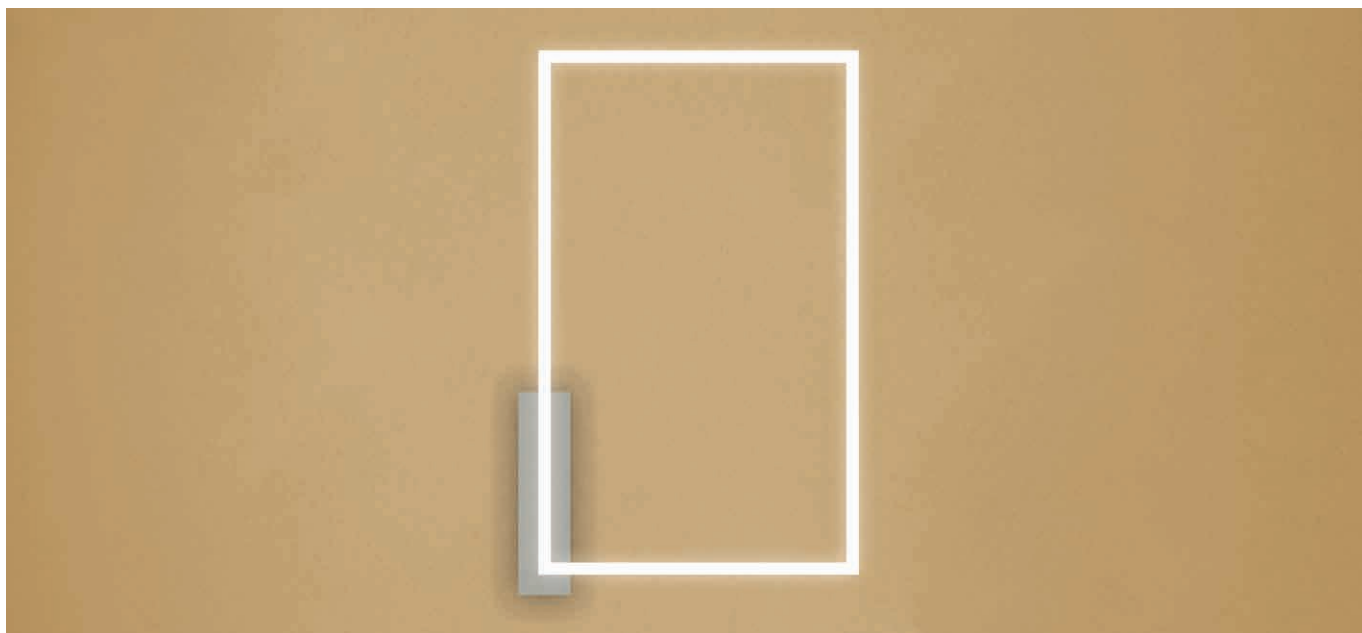

Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.


LED SMD2835 CRI>90

Power: 53W

Lumen: 6300 lm

Constant voltage supply 24Vdc


Power supply included and built in

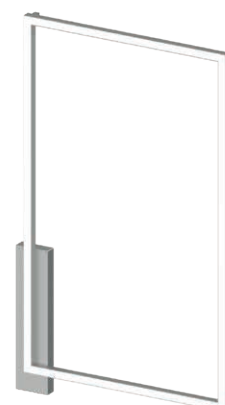

 **MADE IN ITALY**



533



85

BASIC CODES

Q.RY2.

CEILING ROSE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

PROFILE FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K


DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY

- ☒ **N** ON/OFF
- ☐ **P** PUSH
- ☐ **D** DALI

120°




Code example:

QUADRA R2 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.RY2.17BNMD

QUADRA R3

Q.RY3.

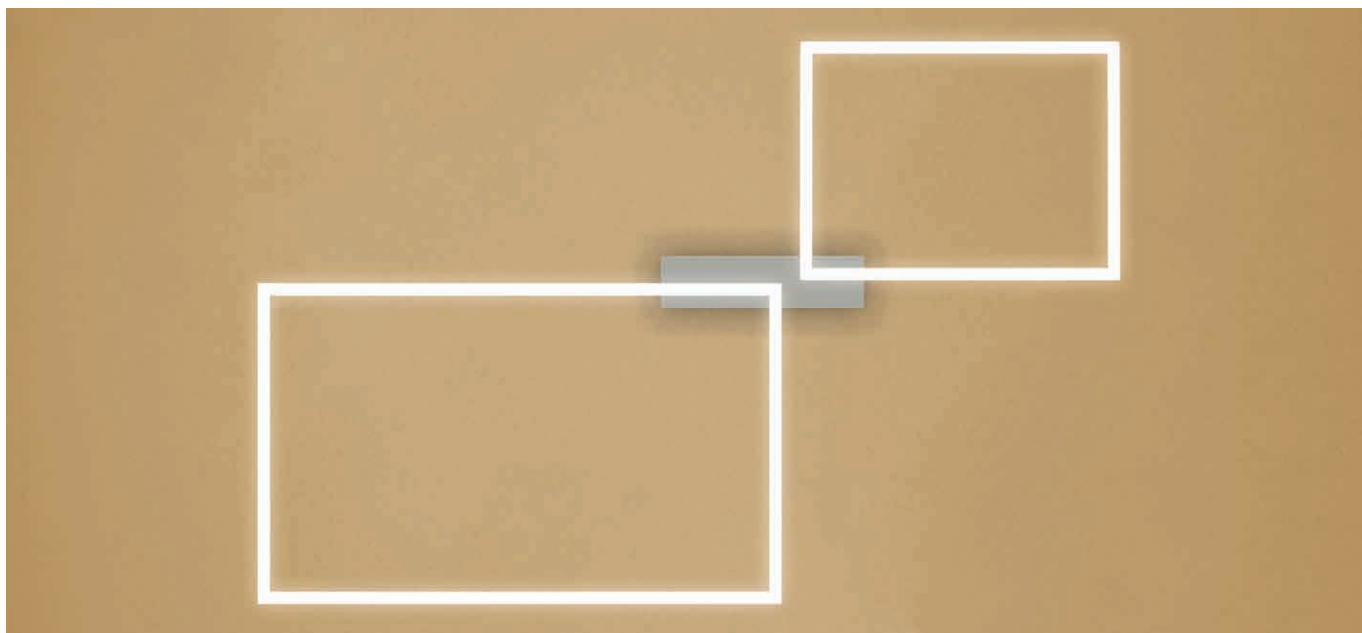

Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.


LED SMD2835 CRI>90

Power: 87W


Lumen: 10500 lm

Constant voltage supply 24Vdc


Power supply included and built in

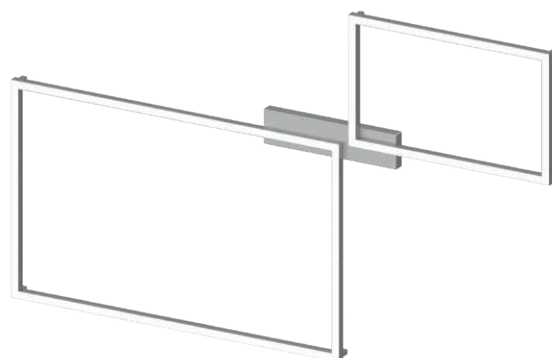

 **MADE IN ITALY**

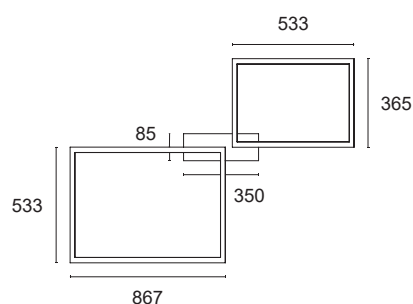

120°



BASIC CODES

Q.RY3.

CEILING ROSE FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 7 Brushed aluminium

PROFILE FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 7 Brushed aluminium

LED COLOUR

- ☐ BN 4000K
- ☒ BC 3000K
- ☐ CC 2700K

DIFFUSER

- ☒ M MICROPRISMATIC
- ☐ S BRUSHED


POWER SUPPLY

- ☒ N ON/OFF
- ☐ P PUSH
- ☐ D DALI

Code example:

QUADRA R3 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.RY3.17BNMD

REM RG32.

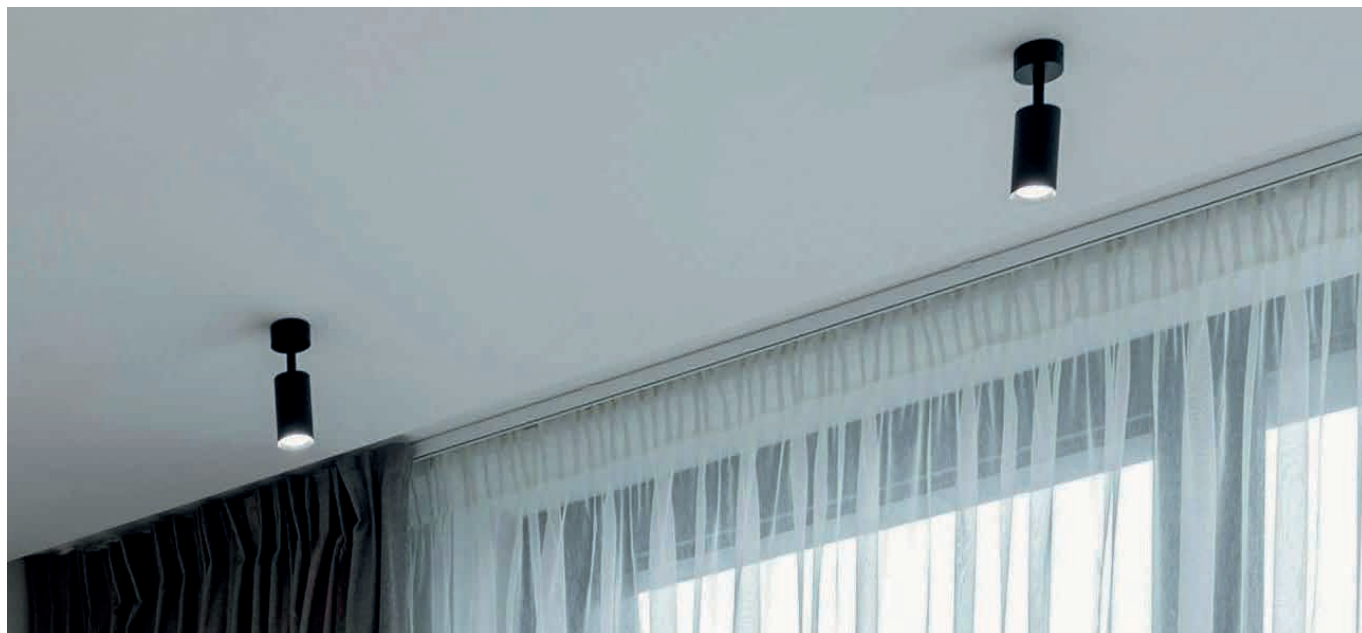

Ø32mm decorated aluminium directional projector decorated with power LEDs for spot, decorative, reading or courtesy lighting. Choice of secondary optics, can be installed indoors. Mounting with concealed insert.

Power LED CRI>90

Power: 2W@500mA - 6W@500mA

Lumen: 216Lm@500mA - 648Lm@500mA

500mA constant current power supply



Series connection, 50 cm cable

Constant current power supplies page 233

Dimming Accessories page 249



 **MADE IN ITALY**

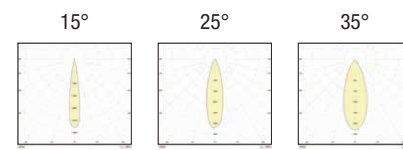

BASIC CODES

RG32.

MEASUREMENTS

A Ø32 - H 130mm

B Ø32 - H 145mm

FINISHES

-  **1** White
-  **2** Matt black
-  **7** Brushed aluminium
-  **9** Polished gold

LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **35** 35°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



POWER

- 3** 1x2W
500mA - 216 lm
- 5** 3x2W
500mA - 648 lm

Code example:

REM + H130mm + White + Light Beam 15° + 4000K + 2W = Code: RG32.A115BN3

CISO P31 CEILING LIGHT

P31.



Ø32mm decorated aluminium cylinder ceiling light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>90

Power: 2W@500mA

Lumen: 216Lm@500mA

500mA constant current power supply



Power supply included and remote

Constant current power supplies page 233

Dimming Accessories page 249



 **MADE IN ITALY**

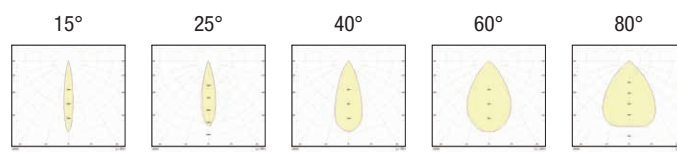

BASIC CODES

P31.

SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

FINISHES

-  **1** White
-  **2** Matt black
-  **5** Gloss aluminium
-  **7** Brushed aluminium
-  **8** Gold leaf
-  **9** Bond Copper

LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **40** 40°
-  **60** 60°
-  **80** 80°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Code example:

CISO P31 CEILING LIGHT + H470mm + White + Light Beam 15° + 4000K = Code: P31.D115BN

CISO P33 CEILING LIGHT

P33.



Ø32mm decorated aluminium cylinder ceiling light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>90

Power: 6W@500mA

Lumen: 648Lm@500mA

500mA constant current power supply



Power supply included and remote

Constant current power supplies page 233

Dimming Accessories page 249



 **MADE IN ITALY**

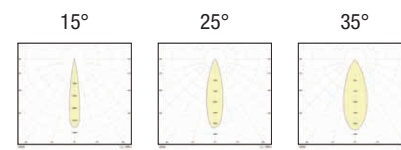

BASIC CODES

P33.

SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

FINISHES

-  **1** White
-  **2** Matt black
-  **5** Gloss aluminium
-  **7** Brushed aluminium
-  **8** Gold leaf
-  **9** Bond Copper

LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **35** 35°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Code example:

CISO P33 CEILING LIGHT + H470mm + White + Light Beam 15° + 4000K = Code: P33.D115BN

CISO P50 CEILING LIGHT

P50.



Ø50mm decorated aluminium cylinder ceiling light with power COB LEDs, suitable as accent or primary lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA



200mA constant current power supply

Power supply included and integrated

Dimming Accessories page 249



 **MADE IN ITALY**

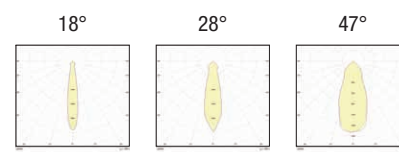

BASIC CODES

P50.

SIZE

B H 180mm*

C H 290mm

D H 470mm

E H 760mm

*(remote power supply)

FINISHES

 **1** White

 **2** Matt black

 **5** Gloss aluminium

 **7** Brushed aluminium

 **8** Gold leaf

 **9** Bond Copper

LIGHT BEAM

 **18** 18°

 **28** 28°

 **47** 47°

LED COLOUR

 **BN** 4000K

 **BC** 3000K


 **CC** 2700K

Code example:

CISO P50 CEILING LIGHT + H470mm + White + Light Beam 18° + 4000K = Code: P50.D118BN

CISO P80 CEILING LIGHT

P80.

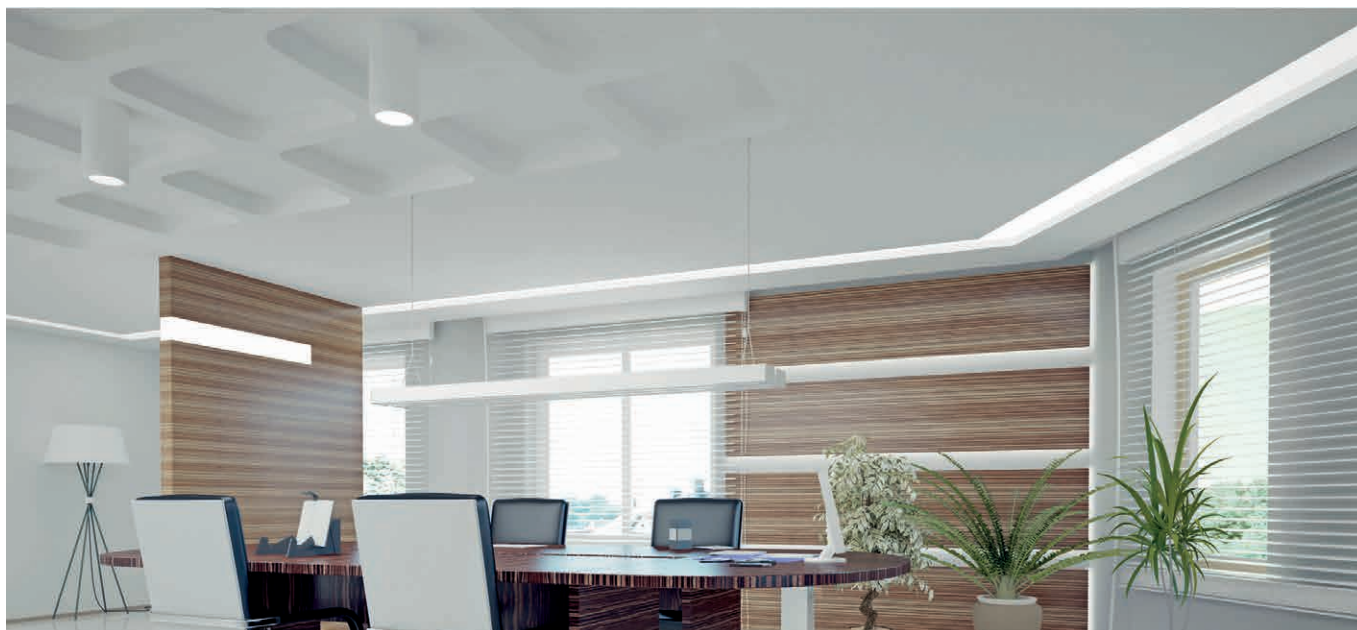

Ø80mm decorated aluminium cylinder ceiling light with power COB LEDs, suitable as primary lighting for residential, commercial, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA



200mA constant current power supply

Power supply included and integrated

Dimming Accessories page 249



 **MADE IN ITALY**

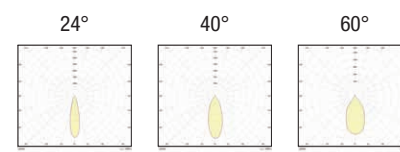

BASIC CODES

P80.

SIZE

B H 180mm*

C H 290mm

D H 470mm

E H 760mm

*(remote power supply)

FINISHES

 **1** White

 **2** Matt black

 **5** Gloss aluminium

 **7** Brushed aluminium

 **8** Gold leaf

 **9** Bond Copper

LIGHT BEAM

 **24** 24°

 **40** 40°

 **60** 60°

LED COLOUR

 **BN** 4000K

 **BC** 3000K


 **CC** 2700K

Code example:

CISO P80 CEILING LIGHT + H470mm + White + Light Beam 40° + 4000K = Code: P80.D140BN

CISO S31 PENDANT LIGHT

S31.

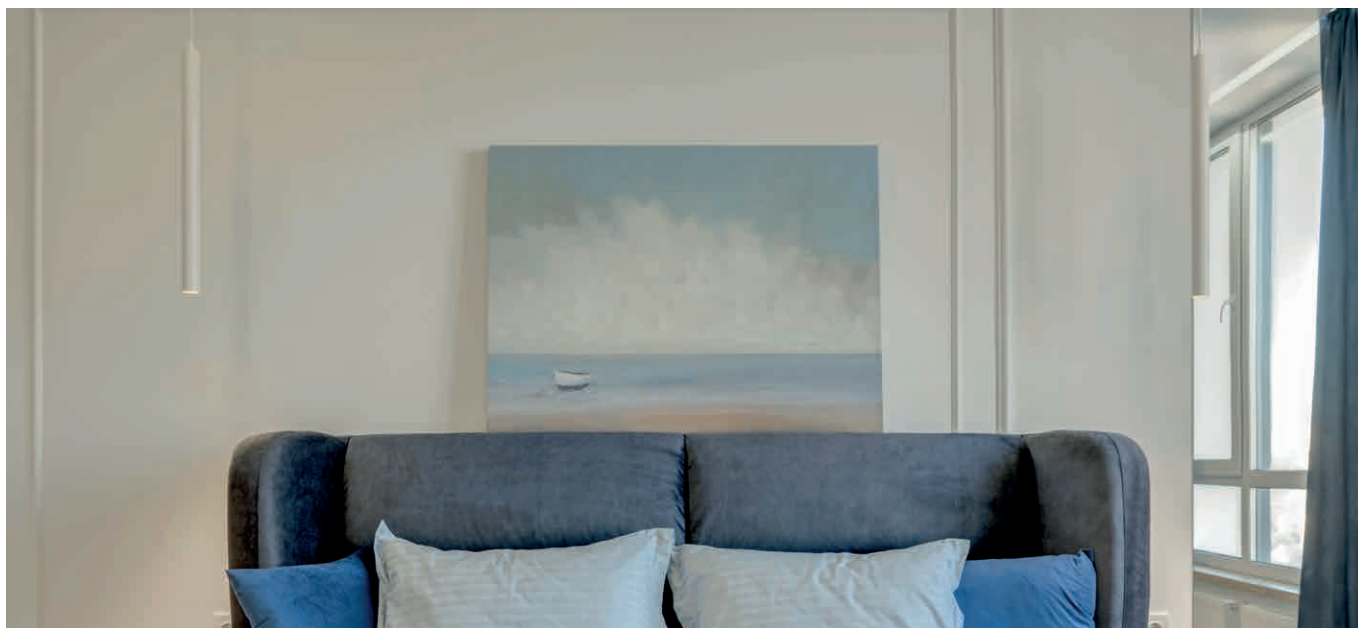

Ø32mm decorated aluminium cylinder suspended light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

Power LED CRI>90

Power: 2W@500mA

Lumen: 216Lm@500mA

500mA constant current power supply



Power supply included and integrated

Installation accessories page 119

Dimming Accessories page 249



 **MADE IN ITALY**

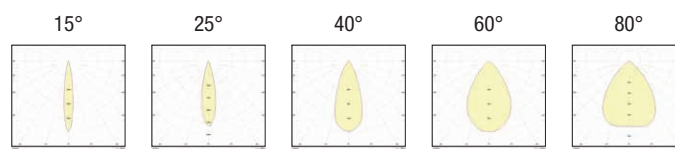

BASIC CODES

S31.

SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

FINISHES

-  **1** White
-  **2** Matt black
-  **5** Gloss aluminium
-  **7** Brushed aluminium
-  **8** Gold leaf
-  **9** Bond Copper

LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **40** 40°
-  **60** 60°
-  **80** 80°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Approved by
CIVC

CABLE

-  **T** Transparent
-  **B** White
-  **N** Black
-  **R** Red

Code example:

CISO S31 SUSPENSION LIGHT + H470mm + White + Light Beam 15° + 4000K + Black Fabric Cable = Code: S31.D115BNN

CISO S33 PENDANT LIGHT

S33.



Ø32mm decorated aluminium cylinder suspended light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

Power LED CRI>90

Power: 6W@500mA

Lumen: 648Lm@500mA



500mA constant current power supply

Power supply included and integrated

Installation accessories page 119

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

S33.

SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

FINISHES

-  **1** White
-  **2** Matt black
-  **5** Gloss aluminium
-  **7** Brushed aluminium
-  **8** Gold leaf
-  **9** Bond Copper

LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **35** 35°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



CABLE

-  **T** Transparent
-  **B** White
-  **N** Black
-  **R** Red

Code example:

CISO S33 SUSPENSION LIGHT + H470mm + White + Light Beam 35° + 4000K + Black Fabric Cable = Code: S33.D135BNN

CISO S50 PENDANT LIGHT

S50.



Ø50mm decorated aluminium cylinder suspension light, suitable as primary lighting for large residential, commercial, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA



200mA constant current power supply

Power supply included and integrated

Installation accessories page 119

Dimming Accessories page 249

 **MADE IN ITALY**



BASIC CODES

S50.

SIZE

- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Gloss aluminium
- ☐ **7** Brushed aluminium
- ☐ **8** Gold leaf
- ☐ **9** Bond Copper

LIGHT BEAM

- ☒ **18** 18°
- ☐ **28** 28°
- ☐ **47** 47°

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

CABLE

- ☒ **T** Transparent
- ☐ **B** White
- ☐ **N** Black
- ☐ **R** Red

Code example:

CISO S50 SUSPENSION LIGHT + H 470mm + White finish + Light Beam 28° + 4000K + Black Fabric Cable = Code: S50.D128BNN

CISO S80 PENDANT LIGHT

S80.



Ø80mm decorated aluminium cylinder suspension light, suitable as primary lighting for large residential, commercial, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

COB LED CRI>90

Power: 7W@200mA

Lumen: 916Lm@200mA



200mA constant current power supply

Power supply included and integrated

Installation accessories page 119

Dimming Accessories page 249

 **MADE IN ITALY**

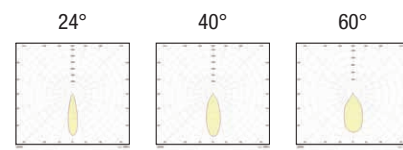

BASIC CODES

S80.

SIZE

- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

FINISHES

-  **1** White
-  **2** Matt black
-  **5** Gloss aluminium
-  **7** Brushed aluminium
-  **8** Gold leaf
-  **9** Bond Copper

LIGHT BEAM

-  **24** 24°
-  **40** 40°
-  **60** 60°

LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K


CABLE

-  **T** Transparent
-  **B** White
-  **N** Black
-  **R** Red

Code example:

CISO S80 SUSPENSION LIGHT + H470mm + White + Light Beam 24° + 4000K + Black Fabric Cable = Code: S80.D124BNN

CEILING ROSES FOR OTHER CISO COMPOSITIONS




BASIC CODES

S31.F1.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 7 Brushed aluminium
- ☐ 8 Gold leaf
- ☐ 9 Bond Copper

Ø50 mm decorated aluminium ceiling rose for fixing CISO S31, S33, S50 and S80 suspension lights onto plasterboard. Flush-mounted with springs.

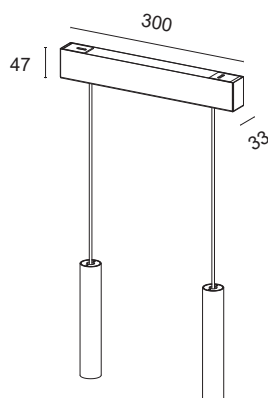


BASIC CODES

RM0300.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 7 Brushed aluminium
- ☐ 8 Gold leaf
- ☐ 9 Bond Copper

300 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions. Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.

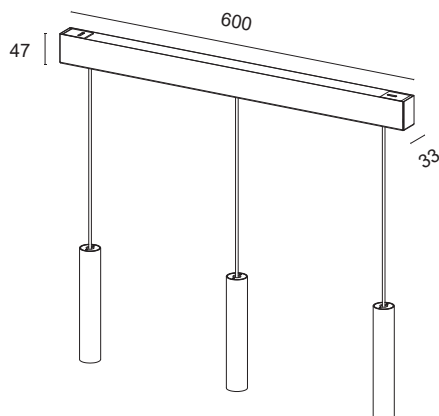


BASIC CODES

RM0600.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 7 Brushed aluminium
- ☐ 8 Gold leaf
- ☐ 9 Bond Copper

600 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions. Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.

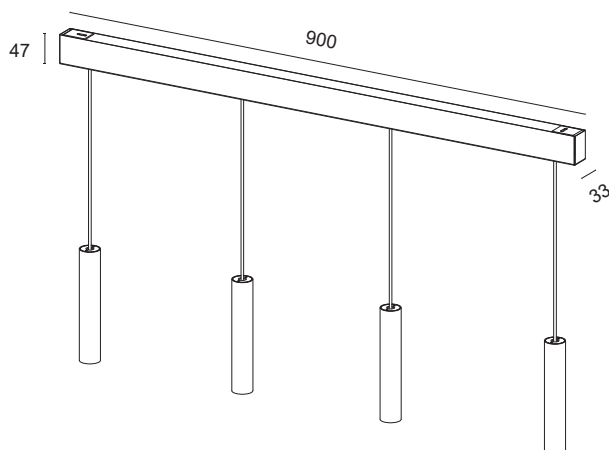

BASIC CODES

RM0900.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 7 Brushed aluminium
- ☐ 8 Gold leaf
- ☐ 9 Bond Copper

900 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions. Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.

Code example:
300mm Ceiling Rose + White = Code: RM0300.1



LINEAR FLUSH-MOUNTED SYSTEM

EPTA	122
SIGMA	124
REFLEX	126
IOTA	128
RASO	130
RHO 1	132
YPSILON 1	134
DELTA 3	136
TAU	138
MILKY	140

EPTA

E1.




Decorated anodised aluminium lamp complete with brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Flush-mounted

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

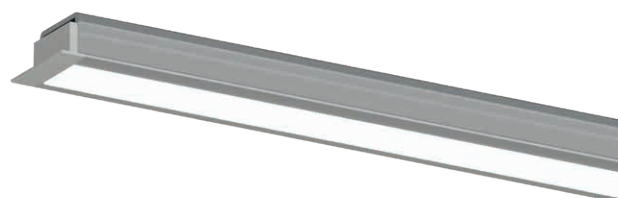

Max. milling cut 18mm

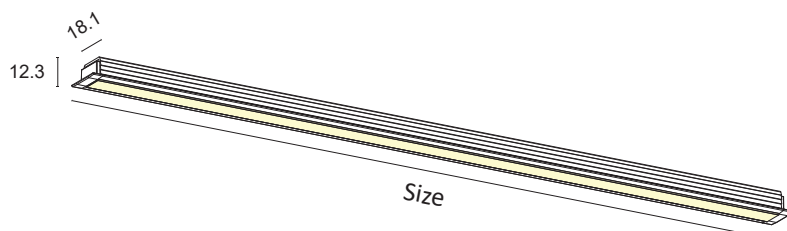

BASIC CODES

E1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- ☐ **1S** White
- ☒ **2S** Matt black
- ☐ **5S** Grey
- ☐ **7S** Brushed aluminium

SIDE SUPPORTS + ON/OFF

- ☐ **1I** White
- ☒ **2I** Matt black
- ☐ **5I** Grey
- ☐ **7I** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
D+	10W/m	1400Lm/m	112LED/m	S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
C2+	15W/m	1550Lm/m	COB LED		CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED
- T** TRANSPARENT

Code example:

EPTA + White + Side supports white + 900mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: E1.11GBDCS

SIGMA

S1.



Decorated anodised aluminium lamp complete with brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Flush-mounted

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**



Max. milling cut 25mm

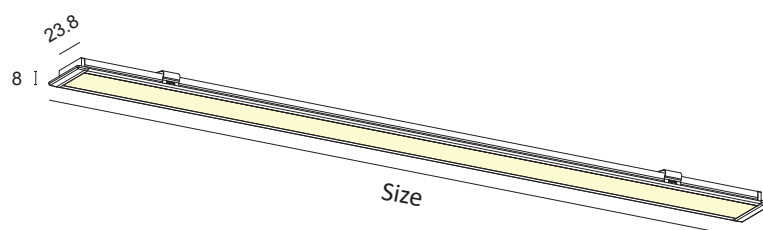

BASIC CODES

S1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	
C1+	10W/m	1050Lm/m	COB LED		CRI>90	
C2+	15W/m	1550Lm/m	COB LED		CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

EPTA + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: S1.11HBCGS

REFLEX

X1.




Decorated anodised aluminium lamp complete with brushed diffuser and indirect emission, high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and service lighting, suitable for furnishing, residential, retail and general lighting. Flush-mounted



Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

 **MADE IN ITALY**

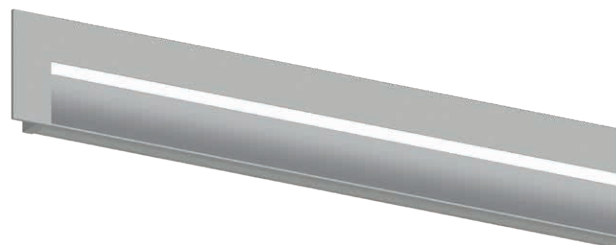

Max. milling cut 23mm

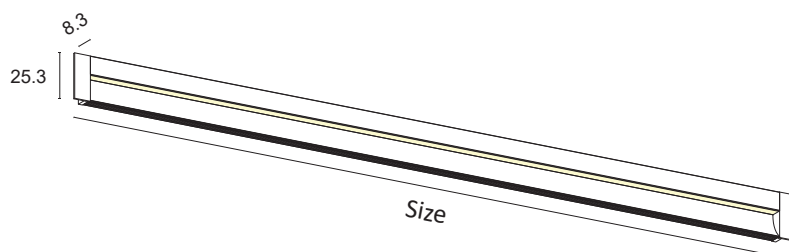

BASIC CODES

X1.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

POWER

- N+** 9.6W/m 800Lm/m 120LED/m S2216 CRI>90 
- O+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90 
- P+** 14.4W/m 1100Lm/m 180LED/m S2216 CRI>90 

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

REFLEX + White + Side supports white + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: X1.11HBCO+S



Decorated anodised aluminium lamp complete with flush-fitted brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and primary residential, retail and general lighting. Flush-mounted


Constant 24Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

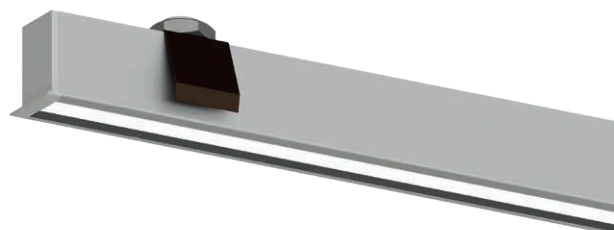

Max. milling cut 15mm

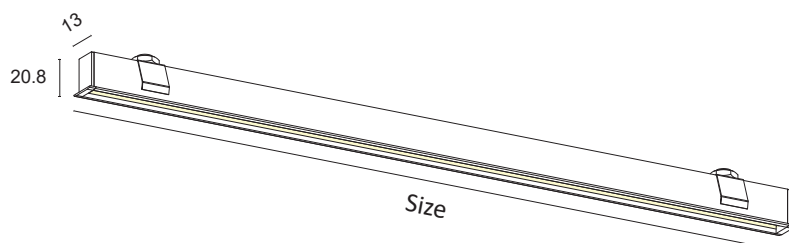

BASIC CODES

I1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m 98LED/m S2835 CRI>85	
D+	10W/m	1400Lm/m 112LED/m S2835 CRI>90	
E	16.8W/m	2000Lm/m 140LED/m S2835 CRI>85	
E+	16.8W/m	2000Lm/m 140LED/m S2835 CRI>90	
F	20.2W/m	2500Lm/m 168LED/m S2835 CRI>85	
F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	
G	25W/m	3500Lm/m 160LED/m S2835 CRI>80	
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	
C1+	10W/m	1050Lm/m COB LED CRI>90	

*Energy class referring to light source

DIFFUSER


- S** BRUSHED

Code example:

IOTA + White + Side supports white + 900mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: I1.11GBCDS

RASO

RS.

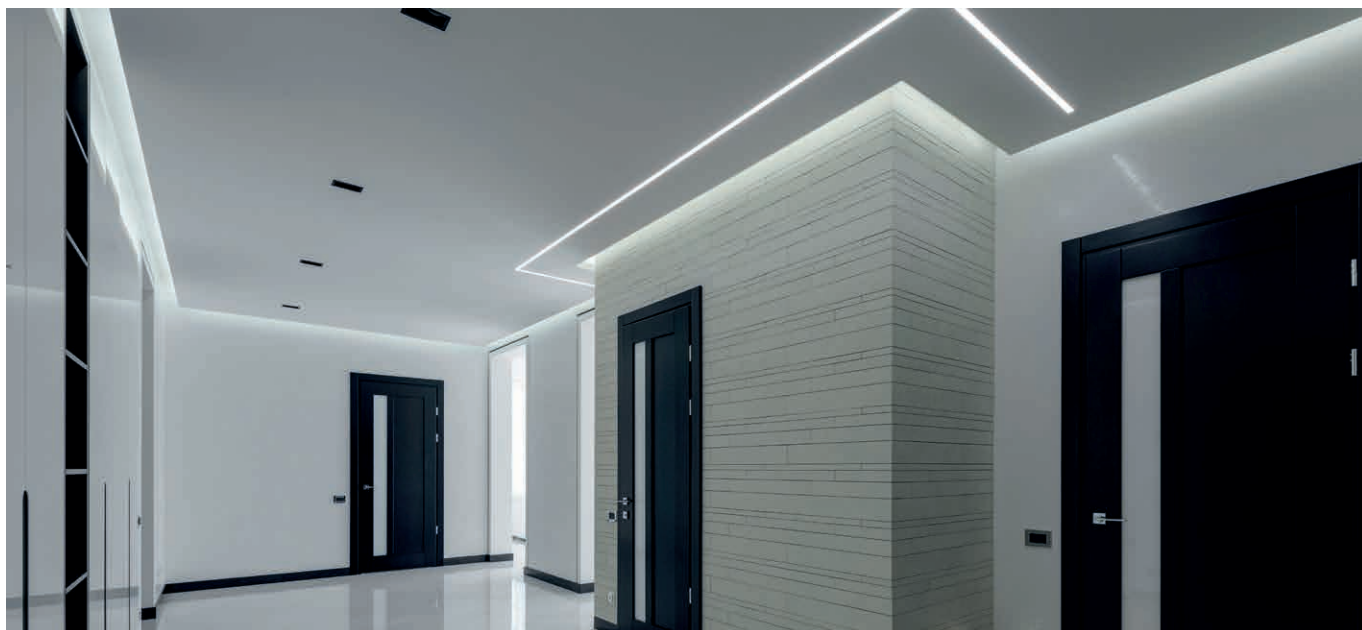


Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted installation onto plasterboard, also supplied with non-returnable cover for plastering.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

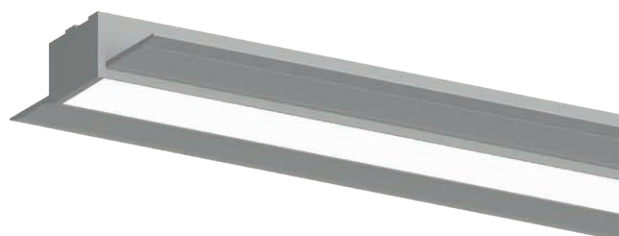

Max. milling cut 22mm

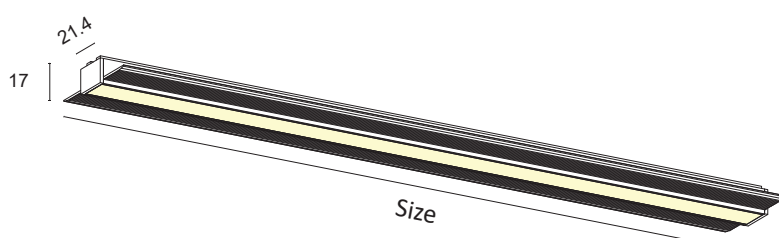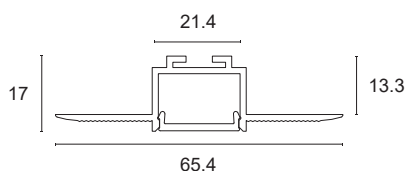

BASIC CODES

RS.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER


- M** MICROPRISMATIC
- S** BRUSHED

Code example:

RASO + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: RS.11HBCGS

RHO 1

R1.

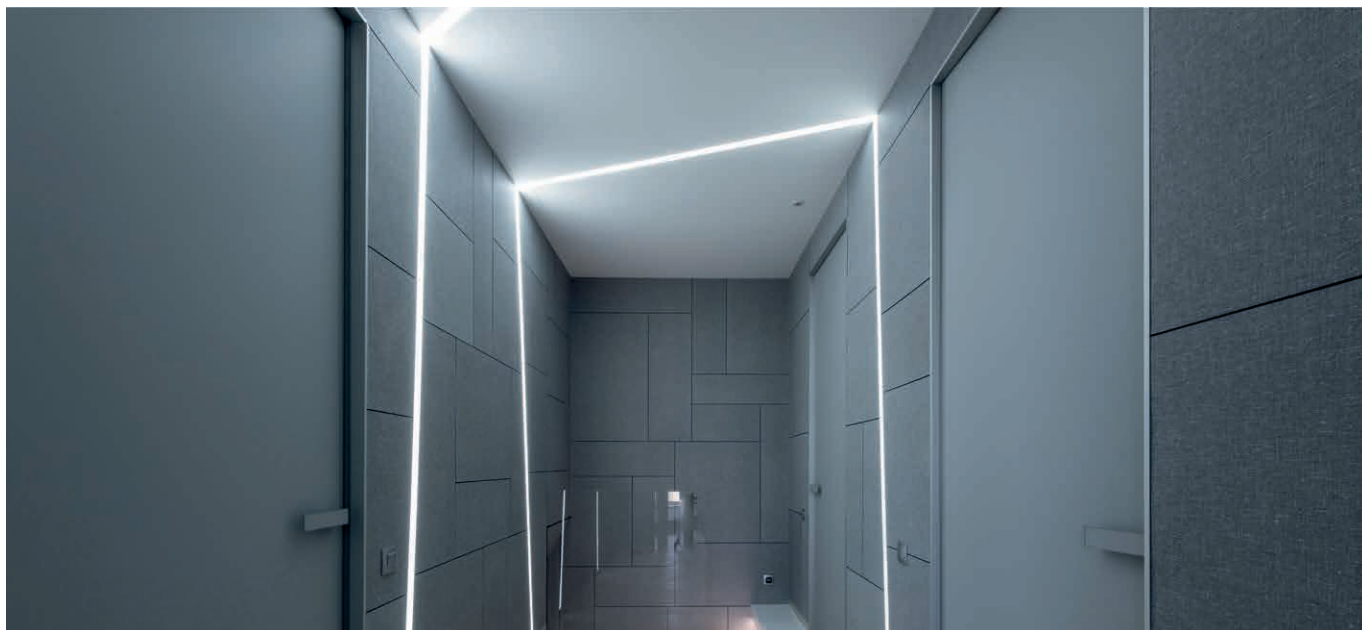


Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted installation onto plasterboard or brick, also supplied with non-returnable cover for plastering.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

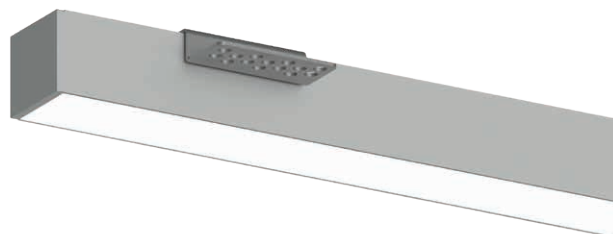

Max. milling cut 23.5mm

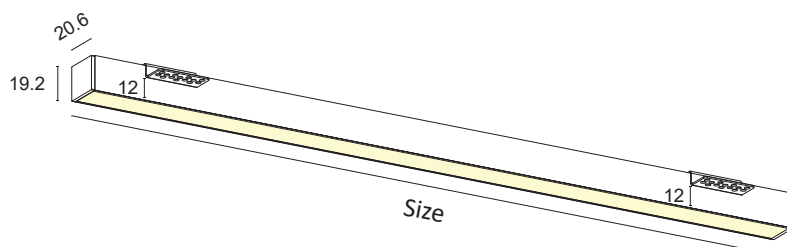

BASIC CODES

R1.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER


- M** MICROPRISMATIC
- S** BRUSHED

Code example:

RHO 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: R1.11HBCGS

YPSILON 1

Y1.

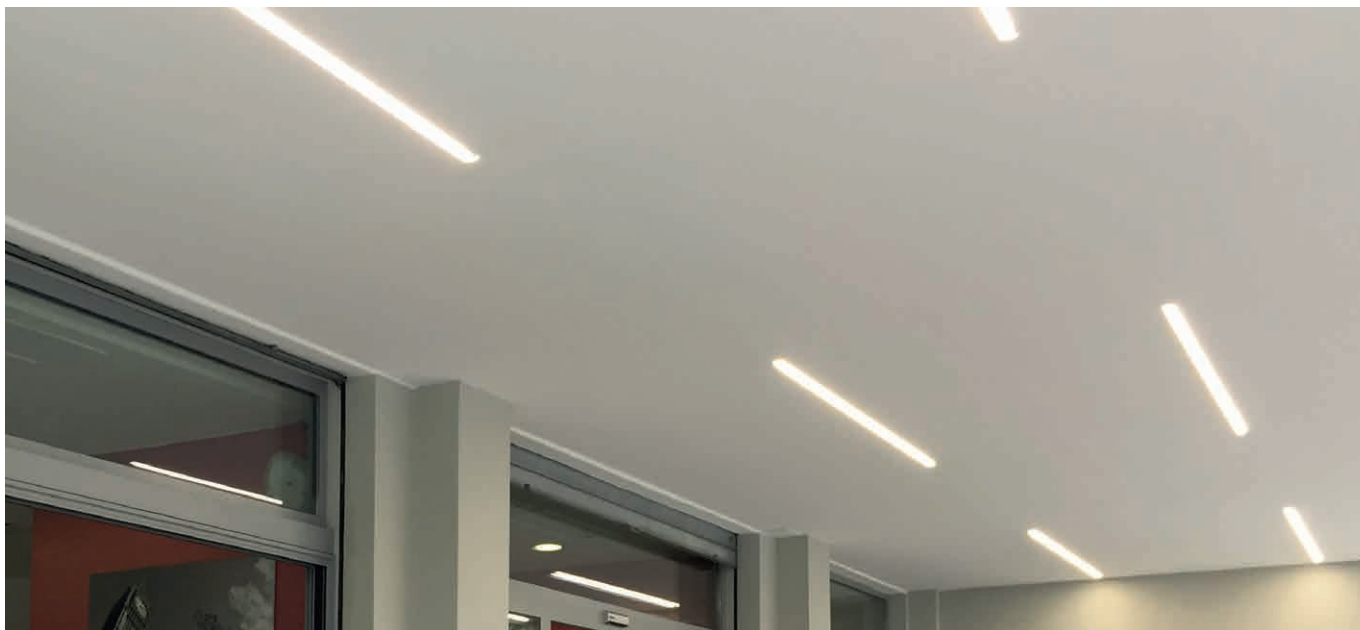


Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. The interlocking profile mechanism allows for easy maintenance. Flush-mounted installation onto plasterboard or brick, also supplied with non-returnable cover for plastering.



Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

 **MADE IN ITALY**

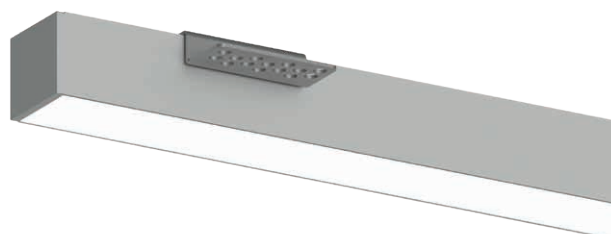

Max. milling cut 23.5mm

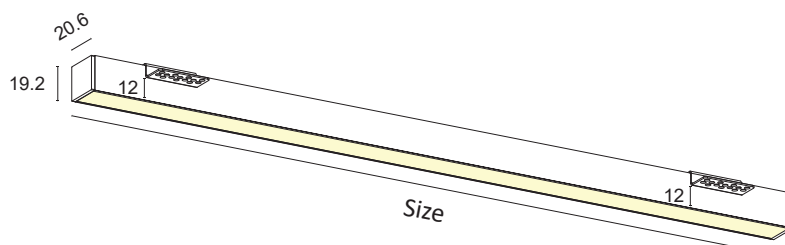

BASIC CODES

Y1.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	

*Energy class referring to light source

DIFFUSER


- M** MICROPRISMATIC
- S** BRUSHED

Code example:

YPSILON 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: Y1.11HBCGS

DELTA 3

D3.

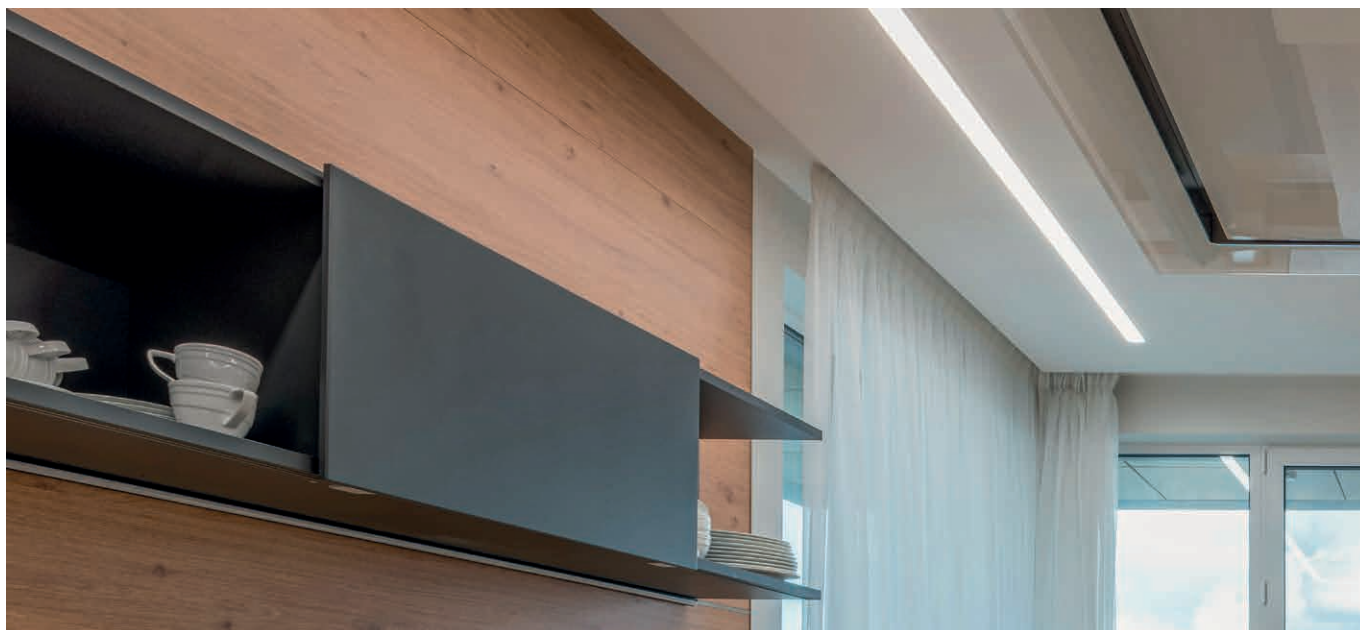

Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary lighting for residential, retail, large-space and general lighting. Flush-mounted


Constant 24Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

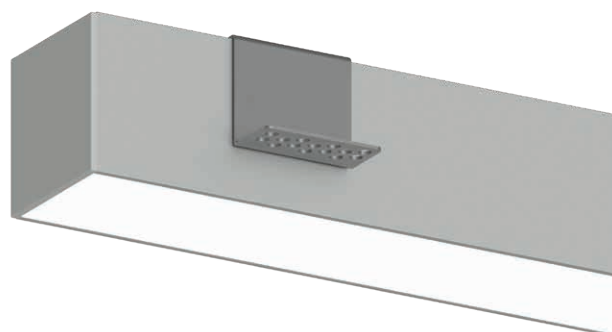

Max. milling cut 39.8mm

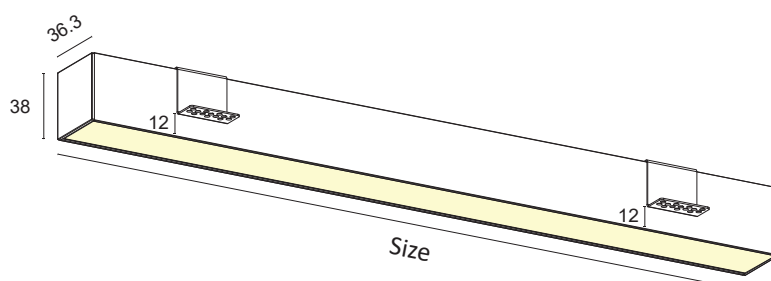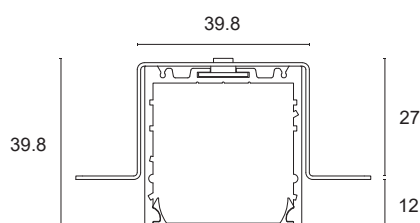

BASIC CODES

D3.

FINISHES

- **1** White
 - **2** Matt black
 - **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- | | | | | | | |
|-----------|---------|----------|----------|-------|--------|--|
| F | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>85 | |
| F+ | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>90 | |
| G | 25W/m | 3500Lm/m | 160LED/m | S2835 | CRI>80 | |
| L+ | 28W/m | 3500Lm/m | 160LED/m | S2835 | CRI>90 | |
| H | 30W/m | 4500Lm/m | 240LED/m | S2835 | CRI>80 | |
| M+ | 40W/m | 5000Lm/m | 480LED/m | S2835 | CRI>90 | |

*Energy class referring to light source

DIFFUSER


- M** MICROPRISMATIC
- S** BRUSHED

Code example:

DELTA 3 + White + Side supports white + 900mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: D3.11GBCFS


COMPLEMENTARY SYSTEMS

EXAMPLE OF DELTA FLUSH MOUNTED AND REM PROJECTOR

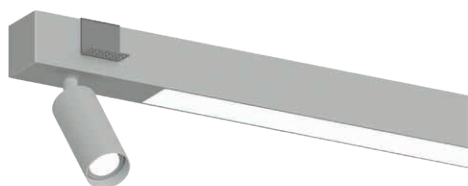


*Details on p. 276

EXAMPLE OF DELTA FLUSH MOUNTED AND DARK MODULE

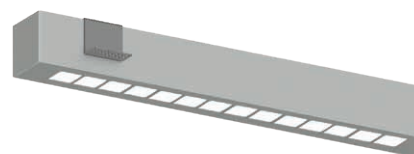

*Details on p. 276


EXAMPLE OF DELTA FLUSH MOUNTED, REM AND DARK MODULE

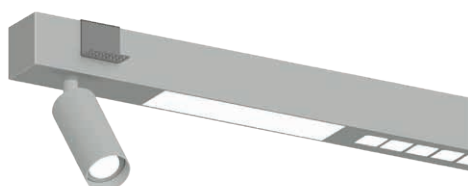

*Details on p. 276

TAU

T1.

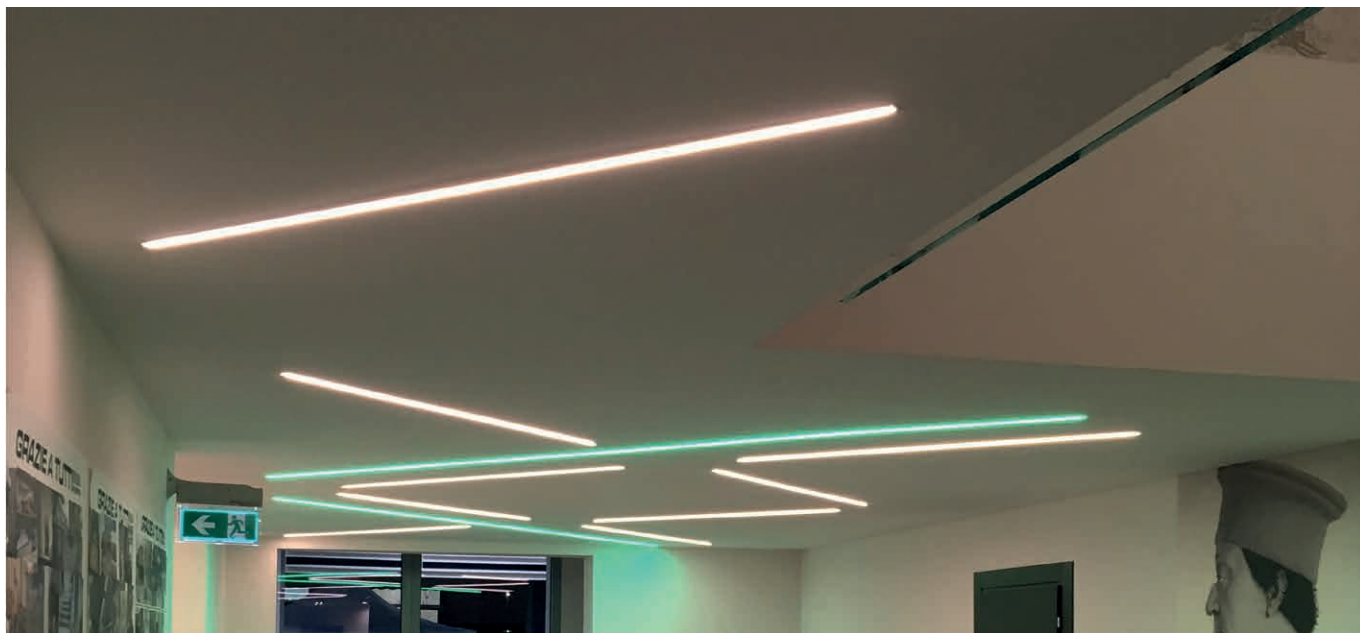

Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted


Constant 24Vdc voltage supply

Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

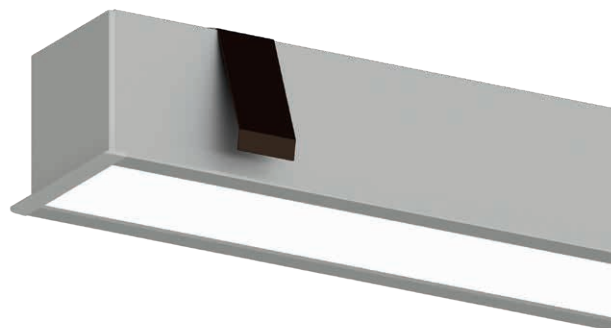

Max. milling cut 38.3mm

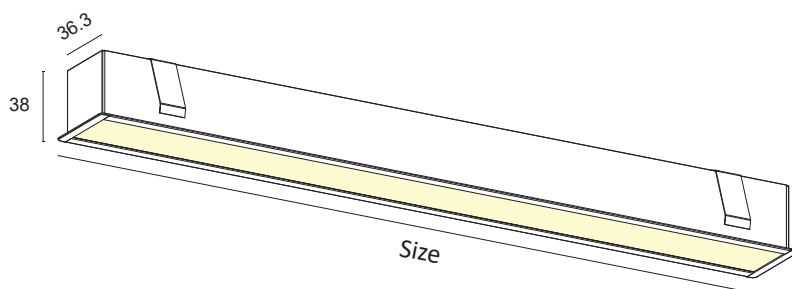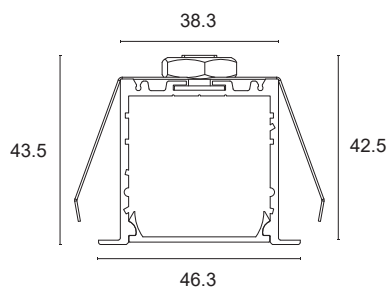

BASIC CODES

T1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	
M+	40W/m	5000Lm/m	480LED/m	S2835	CRI>90	

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

Code example:

TAU + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: T1.11HBCGS

MILKY MK.



Polycarbonate lamp complete with aluminium heat sink and high-brightness LED source with a high Lumen/Watt ratio.
Suitable for accent lighting of furnishing, retail and general lighting.

Flush-mounted

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**



Max. milling cut 8mm

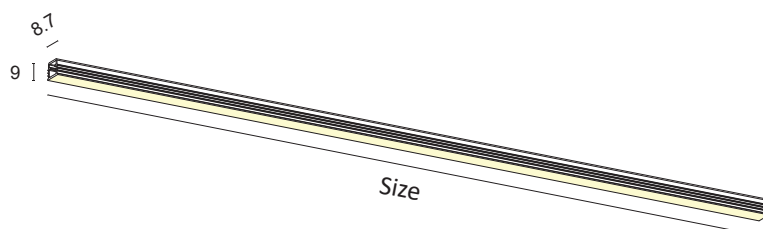

BASIC CODES

MK.

SIZE

A 300mm
B 450mm
C 500mm
D 600mm
E 700mm
F 800mm
G 900mm
H 1000mm
I 1200mm
J 1300mm
K 1400mm
L 1500mm
M 1800mm
N 2000mm
O 2300mm
P 2500mm
Q 2800mm
R 3000mm

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K

POWER

0+ 12W/m 1000Lm/m 300LED/m S2216 CRI>90
*Energy class referring to light source



Code example:


MILKY + 1000mm + 3000K + 12W/m CRI>90 = Codice: **MK.HBCO+**



CEILING-MOUNTED OR FLUSH-MOUNTED LINEAR SYSTEMS

MINI	144
JEY 1	146
JEY 2	148
ZETA 1	150
ZETA 2	152
RHO 3	154
VELA 1	156
VELA 2	158
GAMMA	160
VEGA	162
BETA	164
DELTA 1	166
KAPPA 3	168
QU	170
H1	172
H2	174
H3	176
C1	178
C2	180

MINI M1.

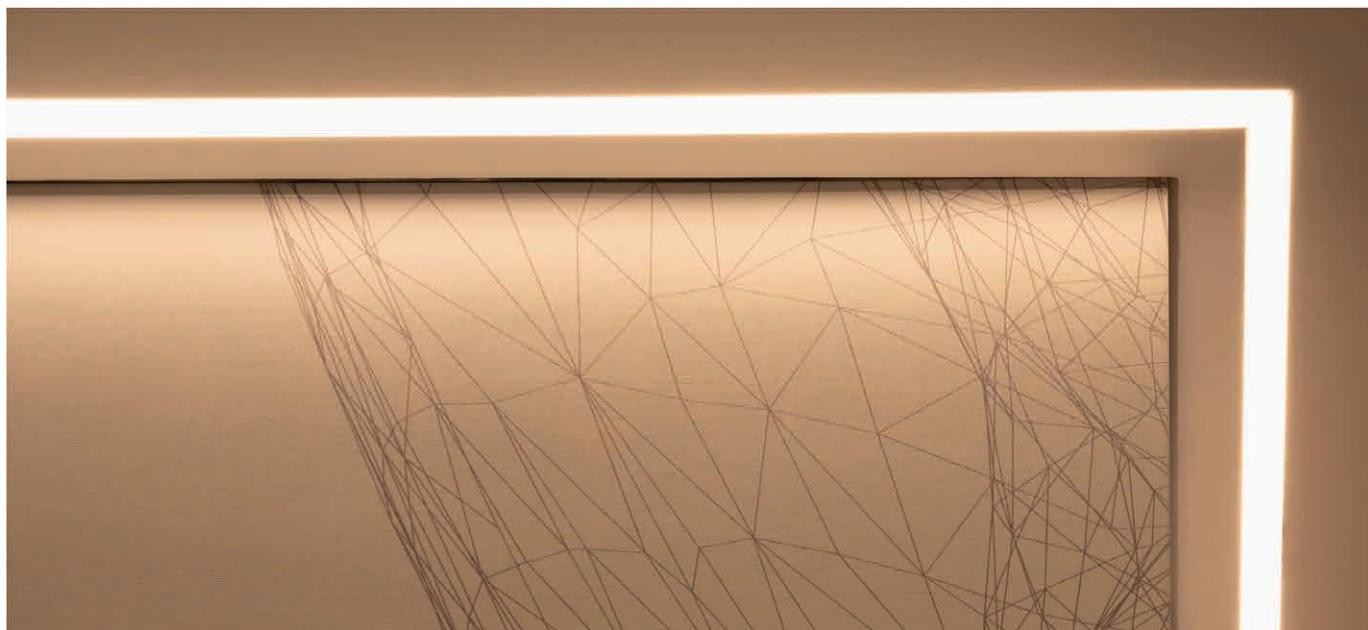

Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting. Mounting with screw clips.




Constant 24Vdc voltage supply

Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

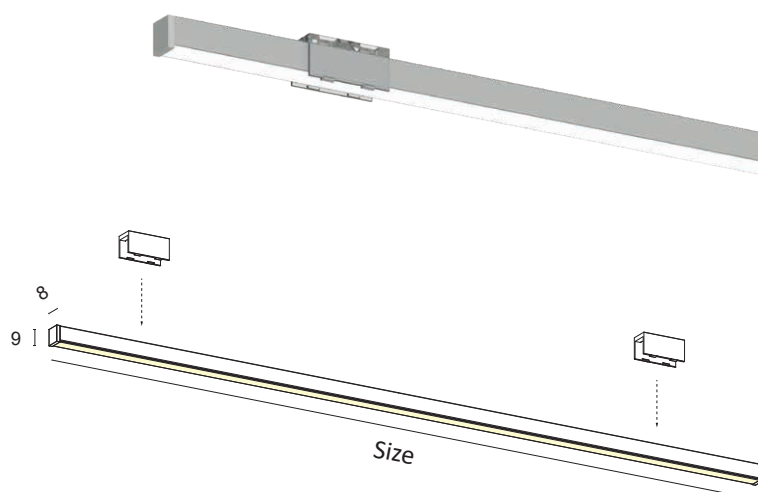

BASIC CODES

M1.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

POWER

- N+** 9.6W/m 800Lm/m 120LED/m S2216 CRI>90 
- O+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90 
- P+** 14.4W/m 1100Lm/m 180LED/m S2216 CRI>90 

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

MINI + White + Side supports white + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: M1.11HBC0+S

JEY 1

J1.



Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting. Mounting with screw clips.



Constant 24Vdc voltage supply

Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

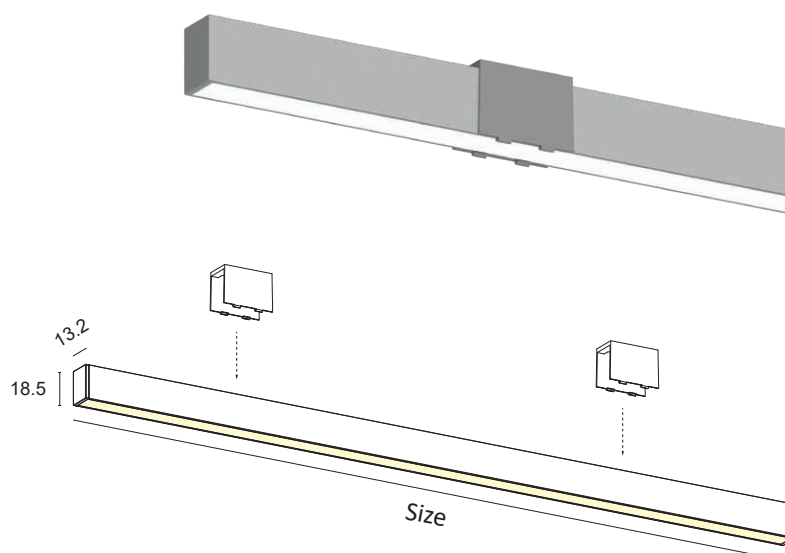

BASIC CODES

J1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85	
D+	10W/m	1400Lm/m	112LED/m S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90	
C1+	10W/m	1050Lm/m	COB LED	CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

JEY 1 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: J1.11HBCDS

JEY 2

J2.



Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.

Mounting with recessed screws.




Constant 24Vdc voltage supply

Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

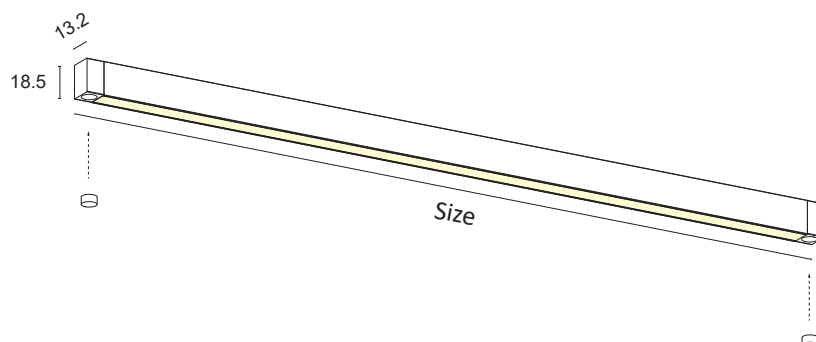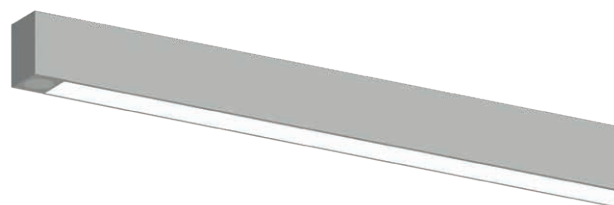

BASIC CODES

J2.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
D+	10W/m	1400Lm/m	112LED/m	S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
C1+	10W/m	1050Lm/m	COB LED		CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

JEY 2 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: J2.11HBCDS

ZETA 1

Z1.






Decorated anodised aluminium lamp complete with press-fit brushed or transparent diffuser, side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Mounting with recessed screws.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

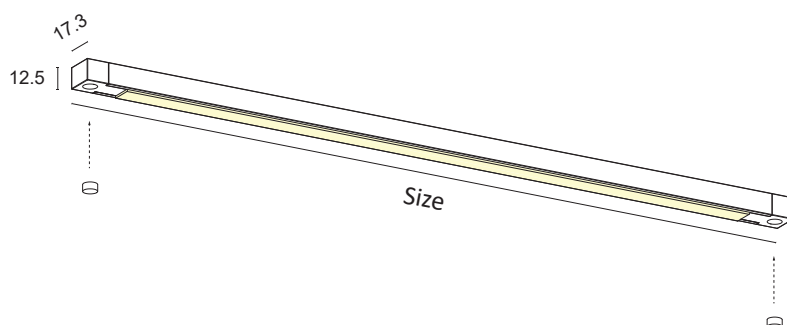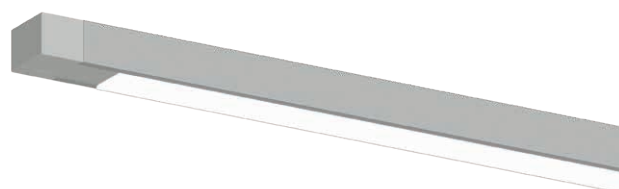

BASIC CODES

Z1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- ☐ **1S** White
- ☒ **2S** Matt black
- ☐ **5S** Grey
- ☐ **7S** Brushed aluminium

SIDE SUPPORTS + ON/OFF

- ☐ **1I** White
- ☒ **2I** Matt black
- ☐ **5I** Grey
- ☐ **7I** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
D+	10W/m	1600Lm/m	112LED/m	S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
C2+	15W/m	1550Lm/m	COB LED		CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED
- T** TRANSPARENT

Code example:

ZETA 1 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: Z1.11HBCDS

ZETA 2

Z2.





Decorated anodised aluminium lamp complete with press-fit brushed or transparent diffuser, side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Mounting with screw clips.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

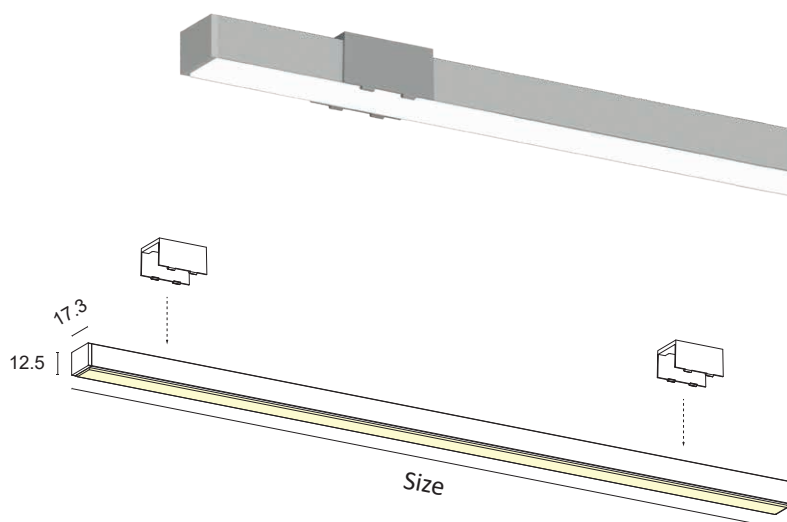

BASIC CODES

Z2.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- ☐ **1S** White
- ☒ **2S** Matt black
- ☐ **5S** Grey
- ☐ **7S** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
D+	10W/m	1600Lm/m	112LED/m	S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
C2+	15W/m	1550Lm/m	COB LED		CRI>90	

*Energy class referring to light source

DIFFUSER


- S** BRUSHED
- T** TRANSPARENT

Code example:

ZETA 2 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: Z2.11HBCDS

RHO 3

R3.

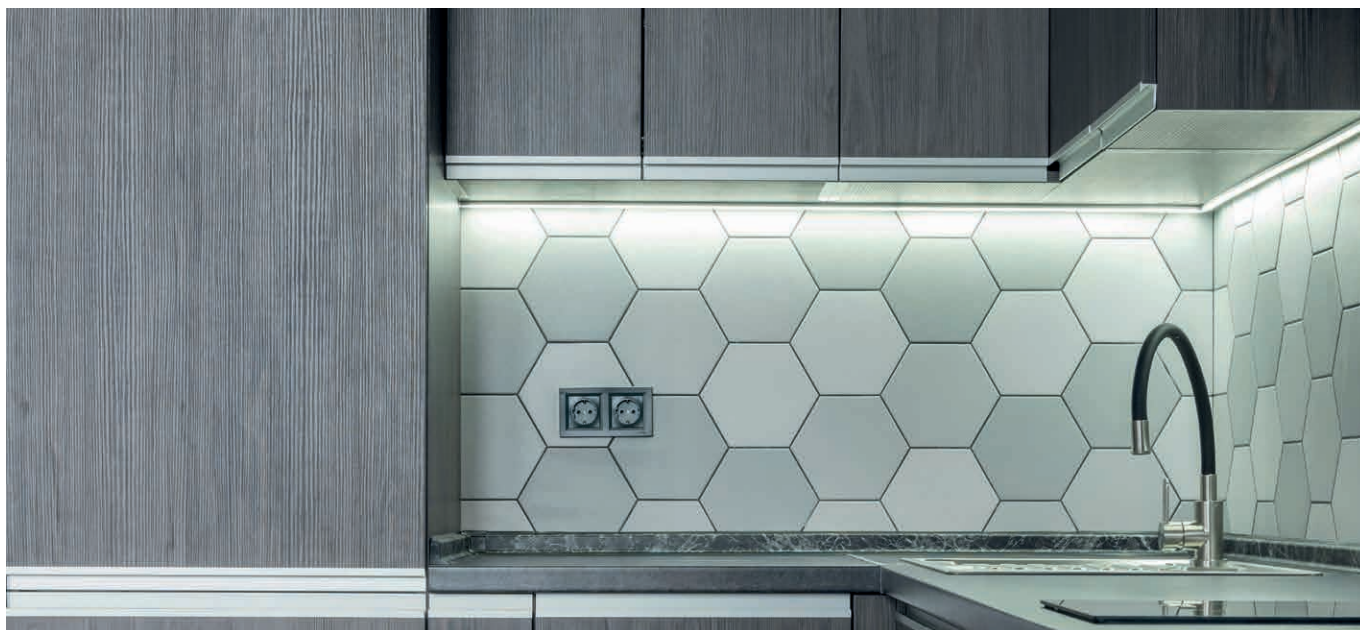




Decorated anodised aluminium lamp complete with press-fit brushed or microprismatic diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with screw clips.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

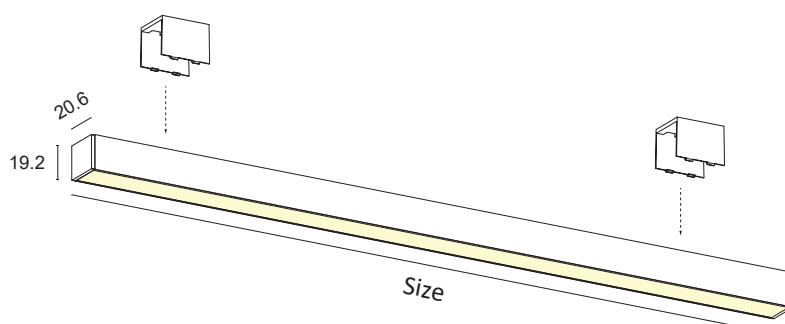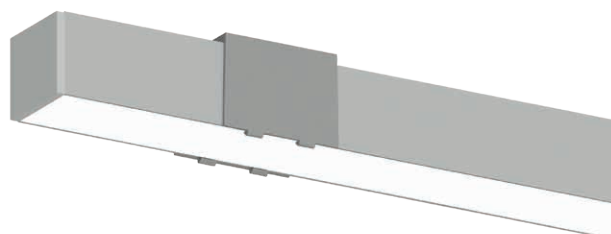

BASIC CODES

R3.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

Code example:

RHO 3 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: R3.11HBCGS

VELA 1

V1.






Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for primary residential and general lighting. Mounting with recessed screws.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

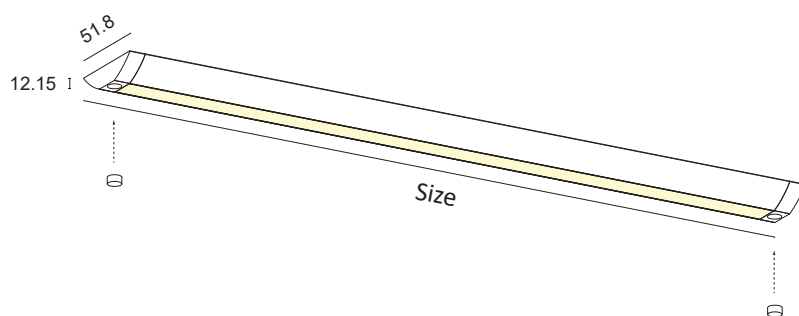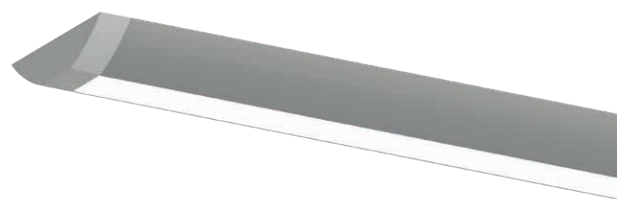

BASIC CODES

V1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- ☐ **1S** White
- ☒ **2S** Matt black
- ☐ **5S** Grey
- ☐ **7S** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

VELA 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: V1.11HBCGS

VELA 2

V2.






Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for primary residential and general lighting. Mounting with recessed clips.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

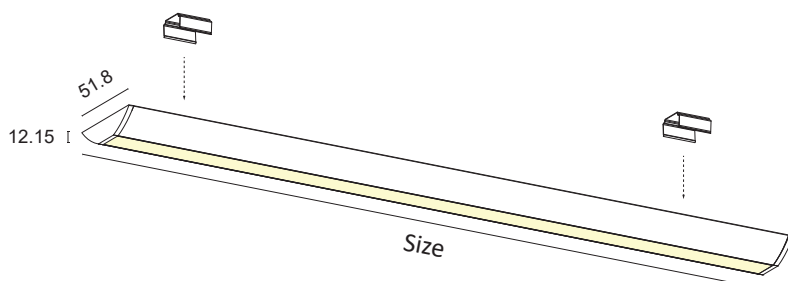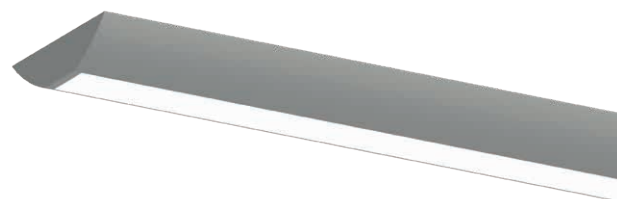

BASIC CODES

V2.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- ☐ **1S** White
- ☒ **2S** Matt black
- ☐ **7S** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER


- S** BRUSHED

Code example:

VELA 2 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: V2.11HBCGS

GAMMA

G1.

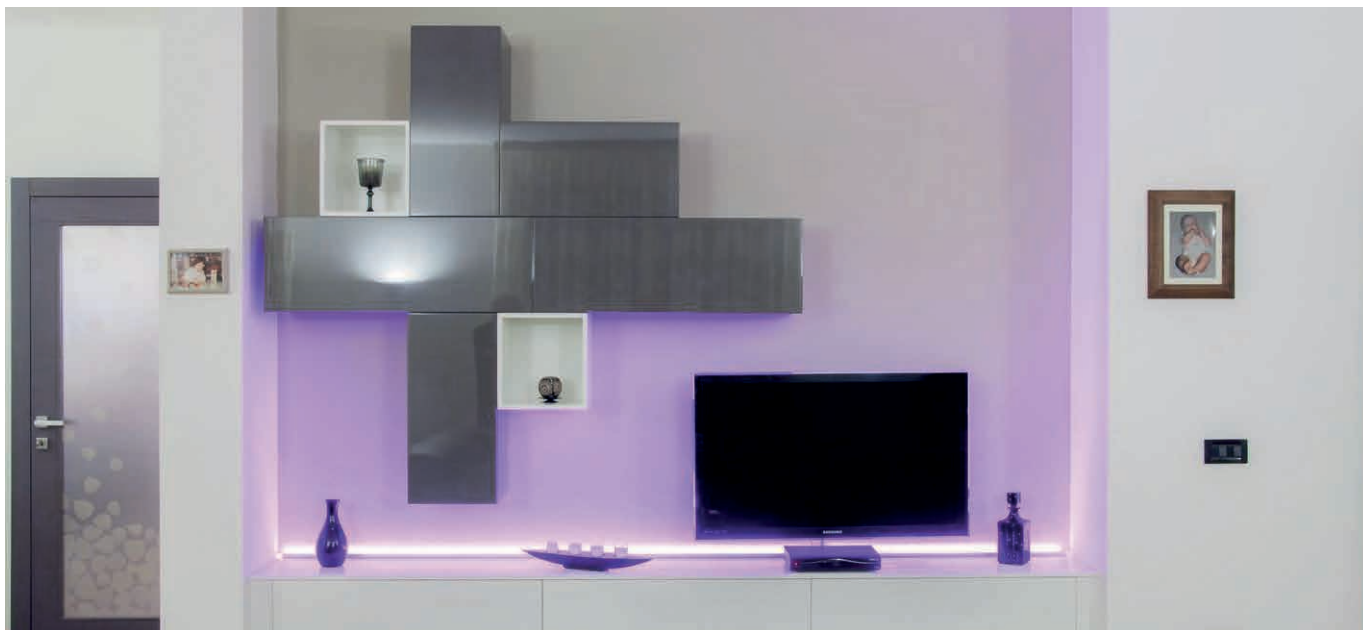



Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for under-wall cupboard, furnishing lighting, panel and general lighting. Mounting with screw clips.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

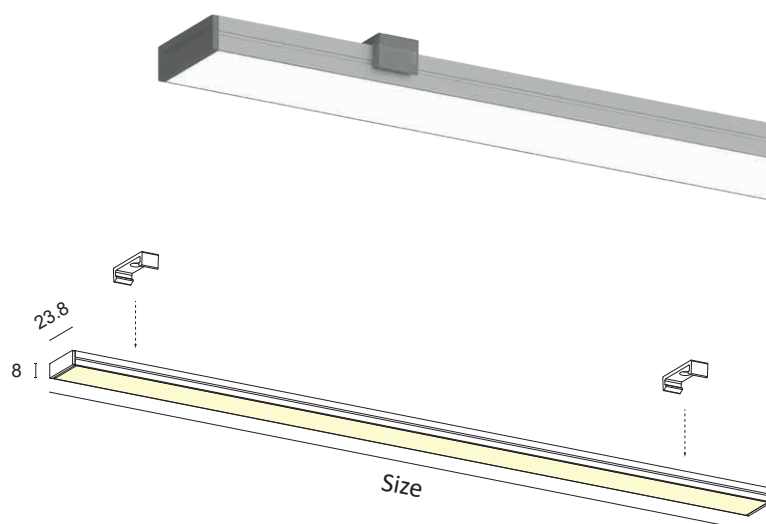

BASIC CODES

G1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- ☐ **1S** White
- ☒ **2S** Matt black
- ☐ **5S** Grey
- ☐ **7S** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	
C1+	10W/m	1050Lm/m	COB LED		CRI>90	
C2+	15W/m	1550Lm/m	COB LED		CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

GAMMA + White + Side supports white + 1000mm + 3000K + 16.8W/m CRI>85 + Brushed diffuser = Code: G1.11HBCES

VEGA

VG1.



Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. 45° light emission, possibility of integrating an on/off Touch system into the edge.




Suitable for under-wall cupboard, furnishing lighting, panel and general lighting. Mounting with screw clips or magnets.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

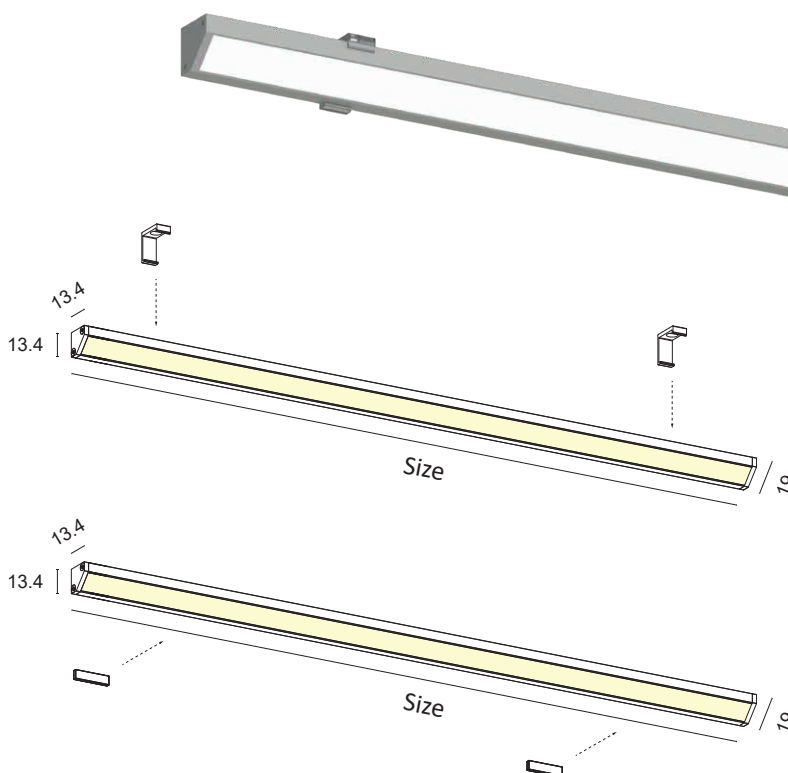

BASIC CODES

VG1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **7T** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85	
D+	10W/m	1600Lm/m	112LED/m S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	
P+	14.4W/m	1100Lm/m	180LED/m S2216	CRI>90	
C2+	15W/m	1550Lm/m	COB LED	CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED


Code example:

VEGA + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: VG1.11HBCDS

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

SVG2.8




Transparent polycarbonate clip with 12xM2.5 screws for surface mounting on a variety of surfaces. 12xM2.5 screws included.

NB. We recommend No. 1 Clip per 500mm

BASIC CODES

NDL40XP5X2



Magnets to glue on for fixing on smooth metal surfaces.

NB. We recommend No. 1 magnet every 150mm (Max. attraction force 1.60kg).

BETA

B1.





Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. 45° light emission, wide availability of accessories that can be integrated into the profile. Suitable for under-wall cupboard, furnishing lighting, panel and general lighting. Mounting with screw clips.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

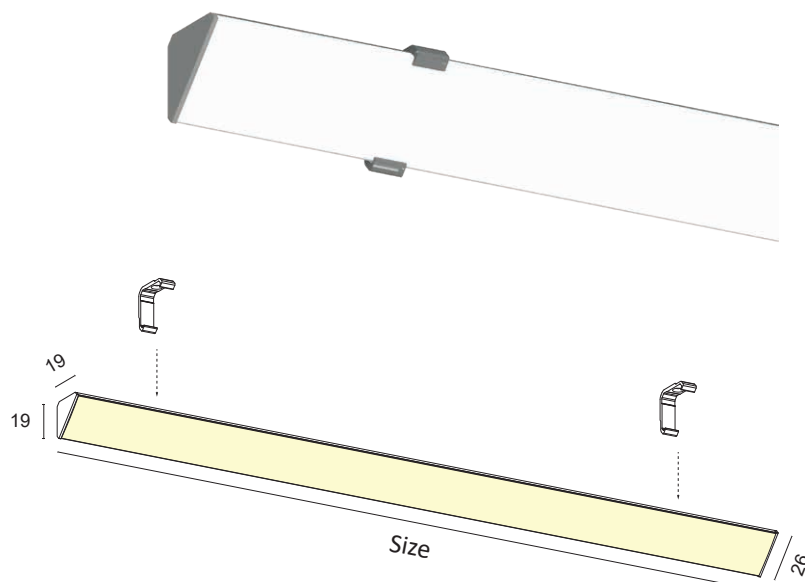

BASIC CODES

B1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **5T** Grey
- ☐ **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- ☐ **1S** White
- ☒ **2S** Matt black
- ☐ **5S** Grey
- ☐ **7S** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- | | | | | | | | |
|-----------|---------|----------|----------------|--------|----------|----------|----------|
| D | 10W/m | 1400Lm/m | 98LED/m S2835 | CRI>85 | D | A | G |
| D+ | 10W/m | 1600Lm/m | 112LED/m S2835 | CRI>90 | C | A | G |
| E | 16.8W/m | 2000Lm/m | 140LED/m S2835 | CRI>85 | D | A | G |
| E+ | 16.8W/m | 2000Lm/m | 140LED/m S2835 | CRI>90 | D | A | G |
| F | 20.2W/m | 2500Lm/m | 168LED/m S2835 | CRI>85 | E | A | G |
| F+ | 20.2W/m | 2500Lm/m | 168LED/m S2835 | CRI>90 | E | A | G |
| G | 25W/m | 3500Lm/m | 160LED/m S2835 | CRI>80 | D | A | G |
| L+ | 28W/m | 3500Lm/m | 160LED/m S2835 | CRI>90 | D | A | G |
| H | 30W/m | 4500Lm/m | 240LED/m S2835 | CRI>80 | C | A | G |

*Energy class referring to light source

DIFFUSER

- S** BRUSHED
- T** TRANSPARENT

Code example:

BETA + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: B1.11HBCGS

DELTA 1

D1.






Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Mounting on ceiling with concealed clips.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

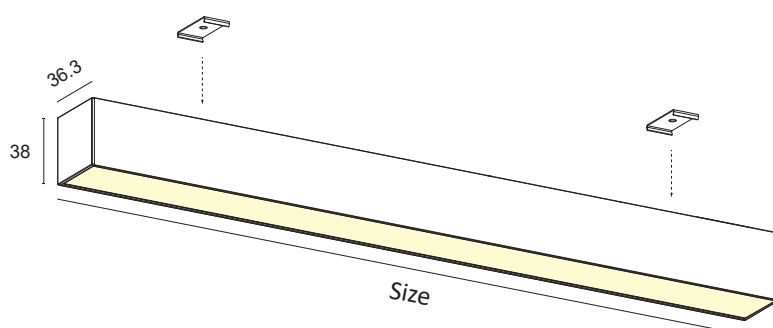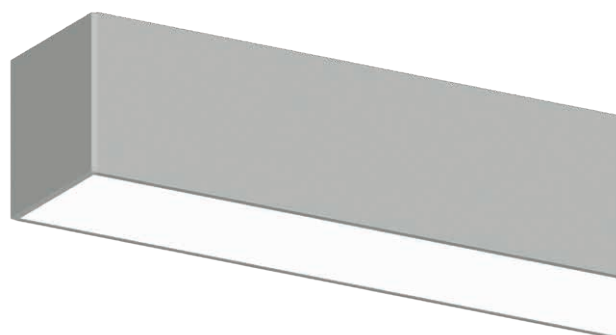

BASIC CODES

D1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- | | | | | | | |
|-----------|---------|----------|----------|-------|--------|-----------------------------------|
| F | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>85 | ☐ E |
| F+ | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>90 | ☐ E |
| G | 25W/m | 3500Lm/m | 160LED/m | S2835 | CRI>80 | ☐ D |
| L+ | 28W/m | 3500Lm/m | 160LED/m | S2835 | CRI>90 | ☐ D |
| H | 30W/m | 4500Lm/m | 240LED/m | S2835 | CRI>80 | ☐ C |
| M+ | 40W/m | 5000Lm/m | 480LED/m | S2835 | CRI>90 | ☐ D |

*Energy class referring to light source

DIFFUSER


- ☐ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

Code example:

DELTA 1 + White + Side supports white + 900mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: D1.11GBCFS


COMPLEMENTARY SYSTEMS

EXAMPLE OF DELTA CEILING LIGHT AND REM PROJECTOR

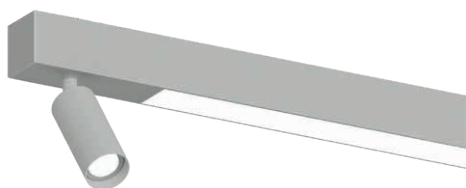


*Details on p. 276

EXAMPLE OF DELTA CEILING LIGHT AND DARK MODULE

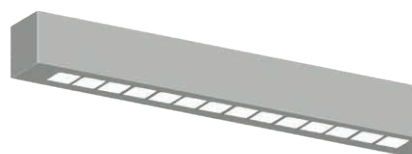

*Details on p. 276

EXAMPLE OF DELTA CEILING LIGHT, REM AND DARK MODULE

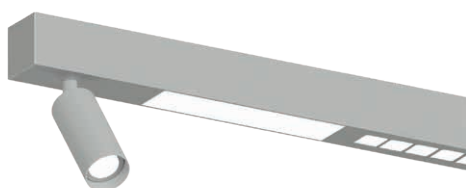

*Details on p. 276

KAPPA 3

K3.






Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Ceiling mounting with concealed magnets, plus steel safety cables.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

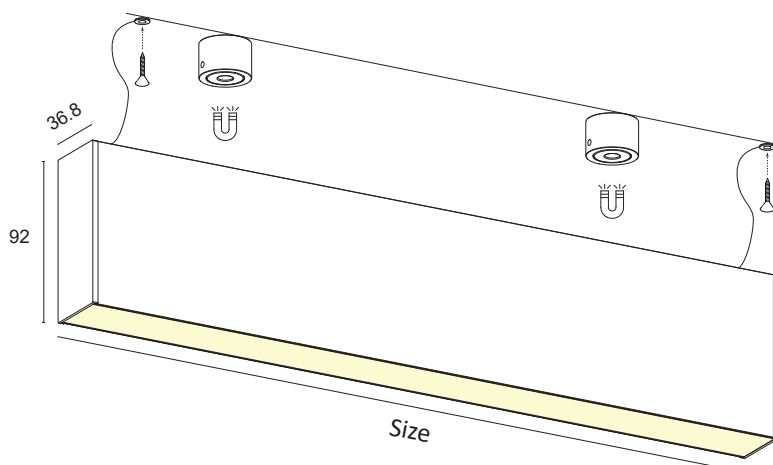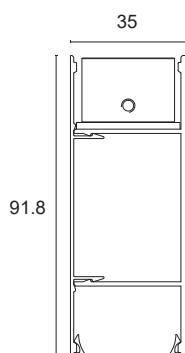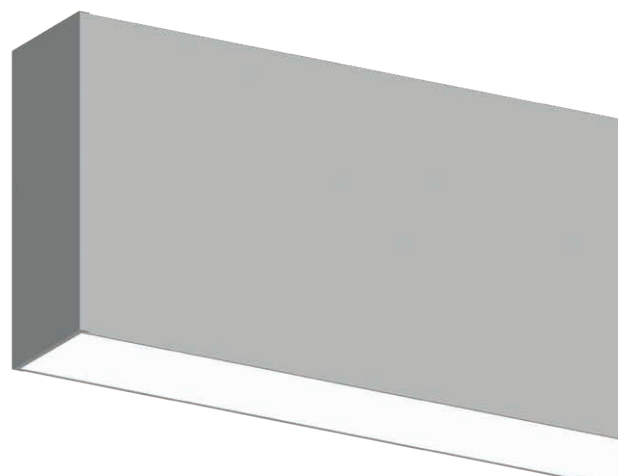

BASIC CODES

K3.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- | | | | | | | |
|-----------|---------|----------|----------|-------|--------|-----------------------------------|
| F | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>85 | ☐ E |
| F+ | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>90 | ☐ E |
| G | 25W/m | 3500Lm/m | 160LED/m | S2835 | CRI>80 | ☐ D |
| L+ | 28W/m | 3500Lm/m | 160LED/m | S2835 | CRI>90 | ☐ D |
| H | 30W/m | 4500Lm/m | 240LED/m | S2835 | CRI>80 | ☐ C |
| M+ | 40W/m | 5000Lm/m | 480LED/m | S2835 | CRI>90 | ☐ D |

*Energy class referring to light source

DIFFUSER

- ☒ **M** MICROPRISMATIC
- ☐ **S** BRUSHED

POWER SUPPLY

- ☒ **N** ON/OFF
- ☐ **D** DALI + PUSH


*The lamp can be customised with independent switch-on and dimming on request.

Code example:

KAPPA 3 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser + ON/OFF = Code: K3.11HBCGSN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA CEILING LIGHT AND REM PROJECTOR

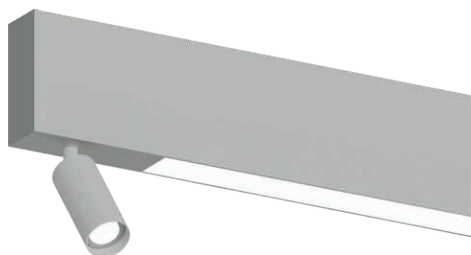


*Details on p. 276

EXAMPLE OF KAPPA CEILING LIGHT AND DARK MODULE

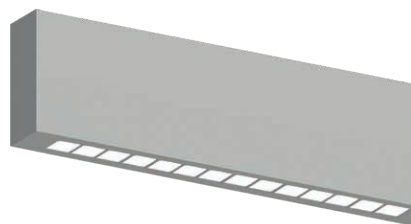

*Details on p. 276

EXAMPLE OF KAPPA CEILING LIGHT, REM AND DARK MODULE

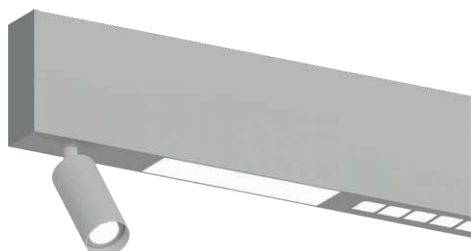

*Details on p. 276

QU

Q1.



Polycarbonate lamp complete with aluminium heat sink and high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent lighting of furnishing, retail and general lighting.



Constant 24Vdc voltage supply

Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

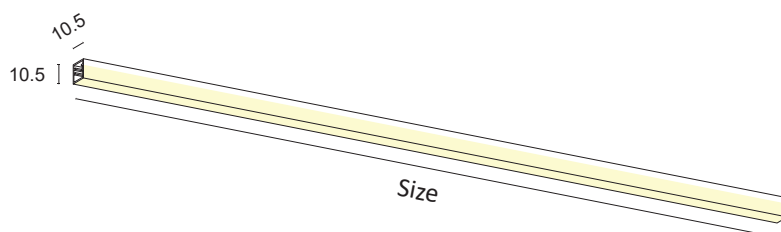

BASIC CODES

Q1.

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

☐ BN	4000K
☐ BC	3000K
☐ CC	2700K

POWER

0+	12W/m	1000Lm/m 300LED/m S2216 CRI>90	F	A ↑ G
P+	14.4W/m	1100Lm/m 180LED/m S2216 CRI>90	G	A ↑ G

*Energy class referring to light source

Code example:

QU + 1000mm + 3000K + 12W/m CRI>90 = Code: Q1.HBCO+

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

NM.

WIDTH

L10 10 mm




Magnetic adhesive tape for anodised aluminium profiles.
Supplied on a 10-metre reel, 1.2 mm thickness.
(Force of attraction >40g/cm².)

BASIC CODES

4965.

WIDTH

08 8 mm



Double-sided adhesive tape for aluminium profiles and LED strips.
Supplied on a 50-metre reel.

H1

H1.







Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with concealed clips or magnets.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

 **MADE IN ITALY**

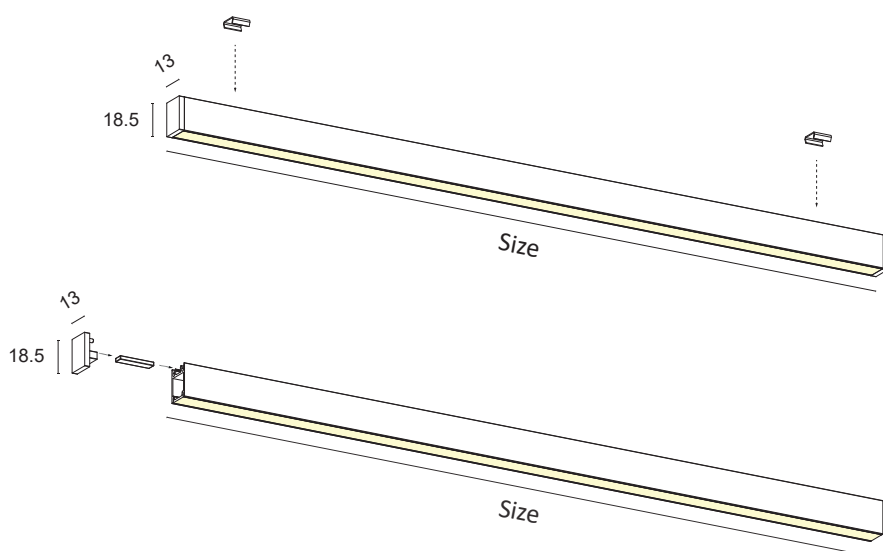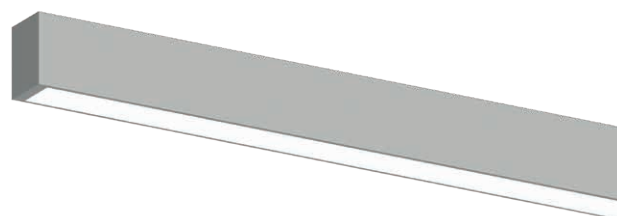

BASIC CODES

H1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
D+	10W/m	1600Lm/m	112LED/m	S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
O+	12W/m	1000Lm/m	300LED/m	S2216	CRI>90	
P+	14.4W/m	1100Lm/m	180LED/m	S2216	CRI>90	
C2+	15W/m	1550Lm/m	COB LED		CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED


Code example:

H1 + White + Side supports white + H1 + 1000mm + 3000K + 10W//m CRI>85 + Brushed diffuser = Code: H1.11HBCDS

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

PA.GG02




Steel clip for snapping onto flat surfaces.
The clip hooks onto the rear slots, which will be perfectly adhered to the surface. 12xM2.5 screws included.

NB. We recommend No. 1 Clip per 500mm

BASIC CODES

NDL40XP5X2



Magnets to glue on for fixing on smooth metal surfaces.

NB. We recommend No. 1 magnet every 150mm (Max. attraction force 1.60kg).

H2

H2.








Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with concealed clips or magnets.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

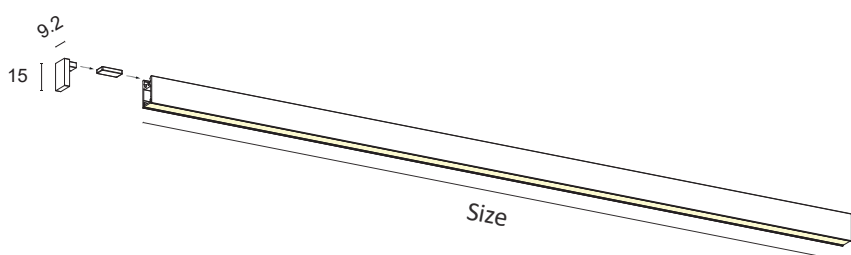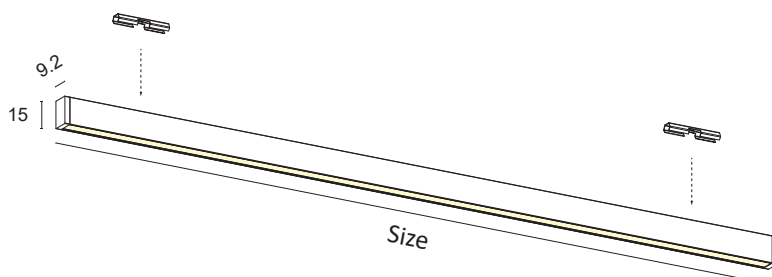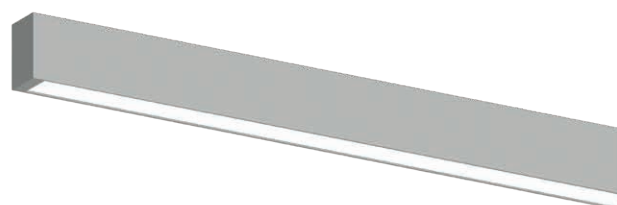

BASIC CODES

H2.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

- N+** 9.6W/m 800Lm/m 120LED/m S2216 CRI>90
- O+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90
- P+** 14.4W/m 1100Lm/m 180LED/m S2216 CRI>90



DIFFUSER

- S** BRUSHED

*Energy class referring to light source


Code example:

H2 + White + Side supports white + H2 + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: H2.11HBC0+S

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

PA.GG10




Steel clip for snapping onto flat surfaces.
The clip hooks onto the rear slots, which will be perfectly adhered to the surface. 12xM2.5 screws included.

NB. We recommend No. 1 Clip per 500mm

BASIC CODES

NDL12XP6X2



Magnets to glue on for fixing on smooth metal surfaces.

NB. We recommend No. 1 magnet every 150mm (Max. attraction force 0.880kg).

H3

H3.






Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with magnets, included in the package.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

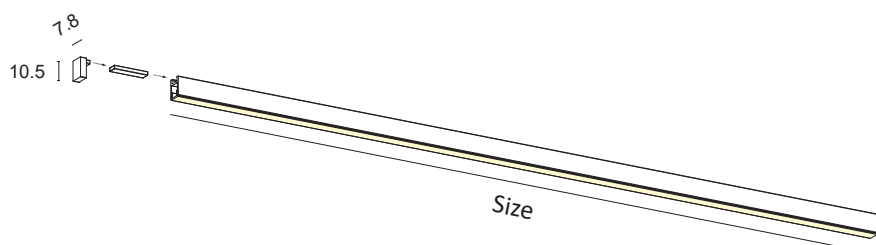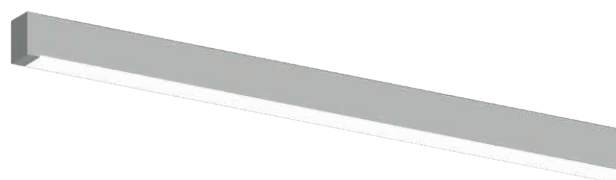

BASIC CODES

H3.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

POWER

- N+** 9.6W/m 800Lm/m 120LED/m S2216 CRI>90 
- O+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90 
- P+** 14.4W/m 1100Lm/m 180LED/m S2216 CRI>90 

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

H3 + White + Side supports white + H2 + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: H3.11HBC0+S

C1

C1.






Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with high Lumen/Watt ratio. Possibility of integrating an on/off Touch system into the edge.
Suitable for furnishing lighting and general lighting.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

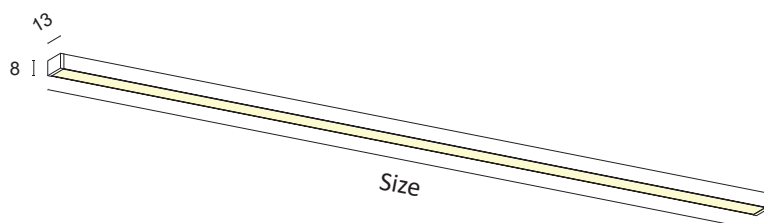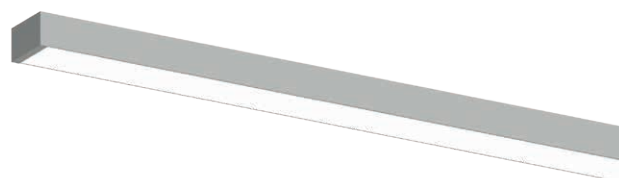

BASIC CODES

C1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **7T** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB.

POWER

- E** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>85
- E+** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>90
- O+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90
- P+** 14.4W/m 1100Lm/m 180LED/m S2216 CRI>90
- C1+** 10W/m 1050Lm/m COB LED CRI>90

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

C1 + White + Side supports white + 1000mm + 3000K + 16.8W/m CRI>85 + Satin diffuser = Code: C1.11HBCES

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

NM.

WIDTH

L10 10 mm




Magnetic adhesive tape for anodised aluminium profiles.
Supplied on a 10-metre reel, 1.2 mm thickness.
(Force of attraction >40g/cm².)

BASIC CODES

4965.

WIDTH

08 8 mm



Double-sided adhesive tape for aluminium profiles and LED strips.
Supplied on a 50-metre reel.

C2

C2.






Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with high Lumen/Watt ratio. Possibility of integrating an on/off Touch system into the edge.
Suitable for furnishing lighting and general lighting.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

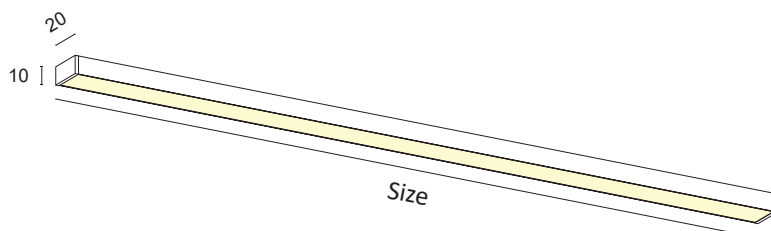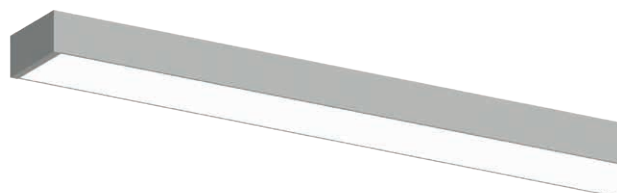

BASIC CODES

C2.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- ☐ **1T** White
- ☒ **2T** Matt black
- ☐ **7T** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
 - ☒ **BC** 3000K
 - ☐ **CC** 2700K
- *Strip also available coloured, Dynamic White, RGB.

POWER

- E** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>85
- E+** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>90
- F** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>85
- F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90
- G** 25W/m 3500Lm/m 160LED/m S2835 CRI>80
- L+** 28W/m 3500Lm/m 160LED/m S2835 CRI>90
- C2+** 15W/m 1550Lm/m COB LED CRI>90

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

C2 + White + Side supports white + C2 + 1000mm + 3000K + 16.8 W/m CRI>85 + Brushed diffuser = Code: C2.11HBCES

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

NM.

WIDTH

L20 20 mm




Magnetic adhesive tape for anodised aluminium profiles.
Supplied on a 10-metre reel, 1.2 mm thickness.
(Force of attraction >40g/cm².)

BASIC CODES

4965.

WIDTH

16 16 mm



Double-sided adhesive tape for aluminium profiles and LED strips.
Supplied on a 50-metre reel.



LINEAR SUSPENSION SYSTEMS

JEY SUSPENSION	184
MAGNETIC JEY SUSPENSION	186
RHO SUSPENSION	188
DELTA SUSPENSION	190
KAPPA SUSPENSION	192
MAGNETIC KAPPA SUSPENSION	194

JEY SUSPENSION

J3.





Decorated, anodised aluminium suspension light complete with brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as technical decorative lighting for residential, commercial, office, retail and general lighting. Minimalist line, 'full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.


Constant 24Vdc voltage supply

Power supply included and integrated


 **MADE IN ITALY**

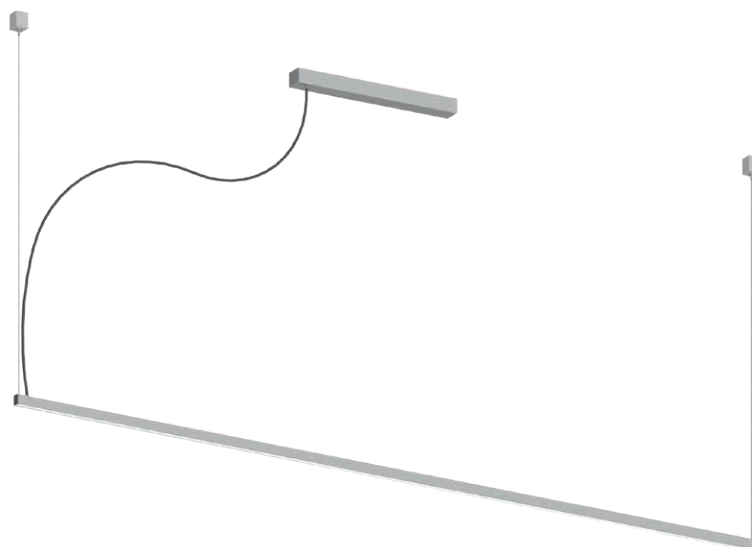

Profile section



Ceiling rose size

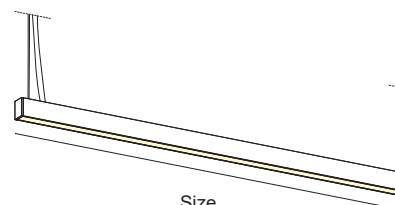

Size

BASIC CODES

J3.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium
- ☐ **8** Gold leaf
- ☐ **9** Bond Copper

*Other finishes on request.

CABLE

- ☐ **T** Transparent
- ☐ **B** White
- ☒ **N** Black

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

- E+** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>90
- F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90
- L+** 28W/m 3500Lm/m 160LED/m S2835 CRI>90

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

POWER SUPPLY

- N** ON/OFF
- D** DALI + PUSH

Code example:

SUSPENSION JEY + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: J3.1NGBCL+SN

MAGNETIC JEY SUSPENSION

J4.





Decorated, anodised aluminium suspension light complete with brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as technical decorative lighting for residential, commercial, office, retail and general lighting. Minimalist line, 'full light' diffusion.

Suspension mounting with central magnetic ceiling rose, steel ropes and concealed screws; 3000 mm cable, choice of finish.


Constant 24Vdc voltage supply

Power supply included and integrated


 **MADE IN ITALY**

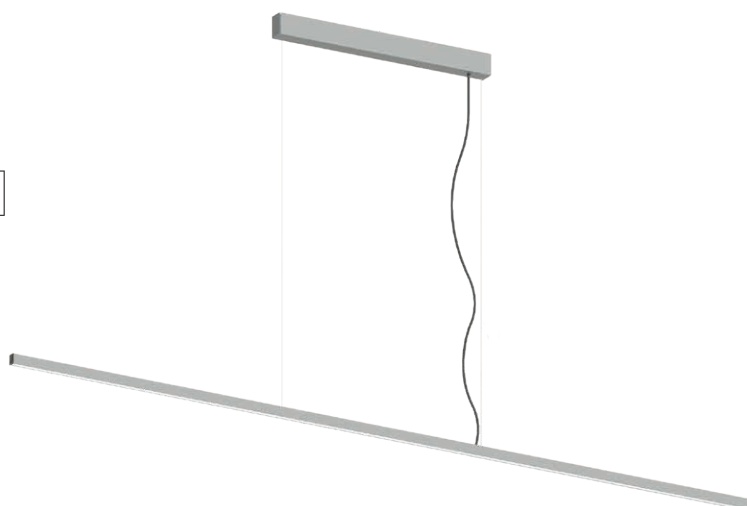

Profile section

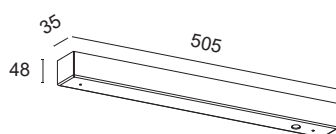

Ceiling rose size

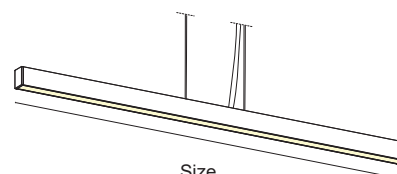

Size

BASIC CODES

J4.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium
- ☐ **8** Gold leaf
- ☐ **9** Bond Copper

*Other finishes on request.

CABLE

- ☐ **T** Transparent
- ☐ **B** White
- ☒ **N** Black

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

- E+** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>90
- F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90
- L+** 28W/m 3500Lm/m 160LED/m S2835 CRI>90

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

POWER SUPPLY

- N** ON/OFF
- D** DALI + PUSH

Code example:

SUSPENSION JEY MAGNETIC + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: J4.1NGBCL+SN

RHO SUSPENSION

R2.





Decorated, anodised aluminium suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as technical decorative lighting for residential, commercial, office, retail and general lighting. Minimalist line, 'full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.


Constant 24Vdc voltage supply

Power supply included and integrated


 **MADE IN ITALY**

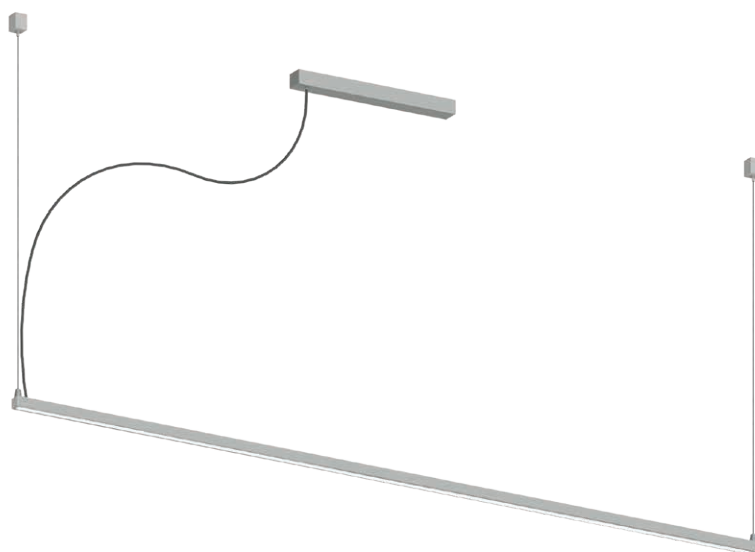

Profile section



Ceiling rose size

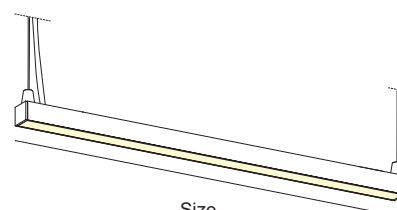

Size

BASIC CODES

R2.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium
- ☐ **8** Gold leaf
- ☐ **9** Bond Copper

*Other finishes on request.

CABLE

- ☐ **T** Transparent
- ☐ **B** White
- ☒ **N** Black

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- E+** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>90
- F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90
- L+** 28W/m 3500Lm/m 160LED/m S2835 CRI>90

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

POWER SUPPLY

- N** ON/OFF
- D** DALI + PUSH

Code example:

RHO SUSPENSION + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: R2.1NGBCL+SN

DELTA SUSPENSION

D2.





Decorated, anodised aluminium suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as primary technical decorative lighting for residential, commercial, office, retail and general lighting. 'Full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.


Constant 24Vdc voltage supply

Power supply included and integrated


 **MADE IN ITALY**

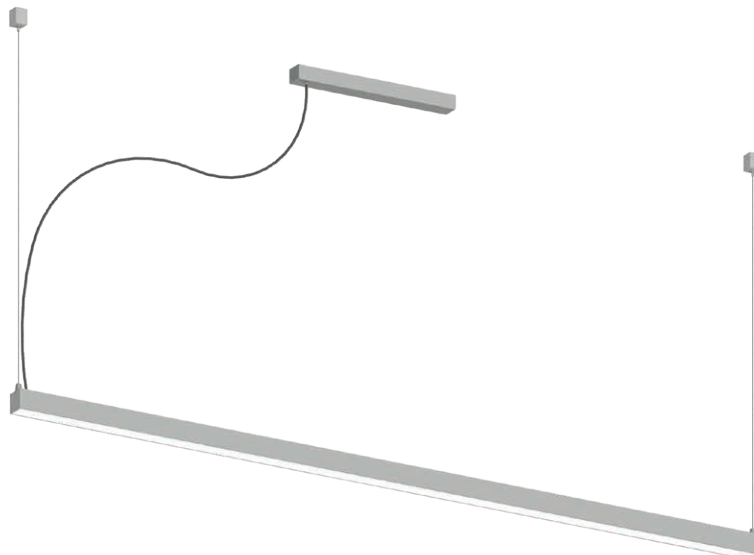

Profile section



Ceiling rose size

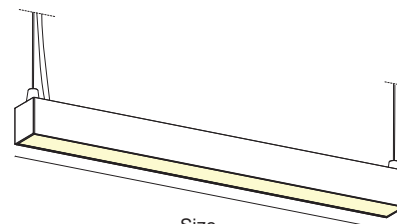

Size

BASIC CODES

D2.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium
- ☐ **8** Gold leaf
- ☐ **9** Bond Copper

*Other finishes on request.

CABLE

- ☒ **T** Transparent
- ☐ **B** White
- ☒ **N** Black

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90
- L+** 28W/m 3500Lm/m 160LED/m S2835 CRI>90
- M+** 40W/m 5000Lm/m 480LED/m S2835 CRI>90

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

POWER SUPPLY


- N** ON/OFF
- D** DALI + PUSH

Code example:

DELTA SUSPENSION + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: D2.1NGBCL+SN


COMPLEMENTARY SYSTEMS

EXAMPLE OF DELTA SUSPENSION AND REM PROJECTOR

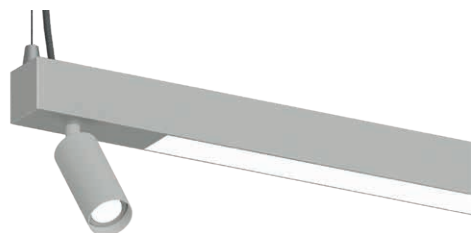


*Details on p. 276

EXAMPLE OF DELTA SUSPENSION AND DARK MODULE

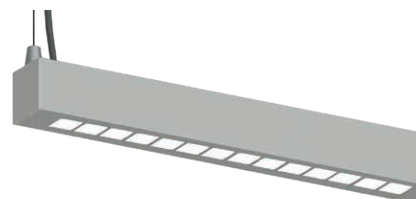

*Details on p. 276


EXAMPLE OF DELTA SUSPENSION, REM AND DARK MODULE

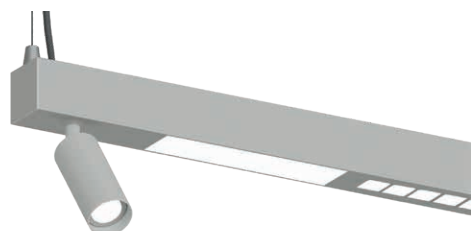

*Details on p. 276

KAPPA SUSPENSION

K2.

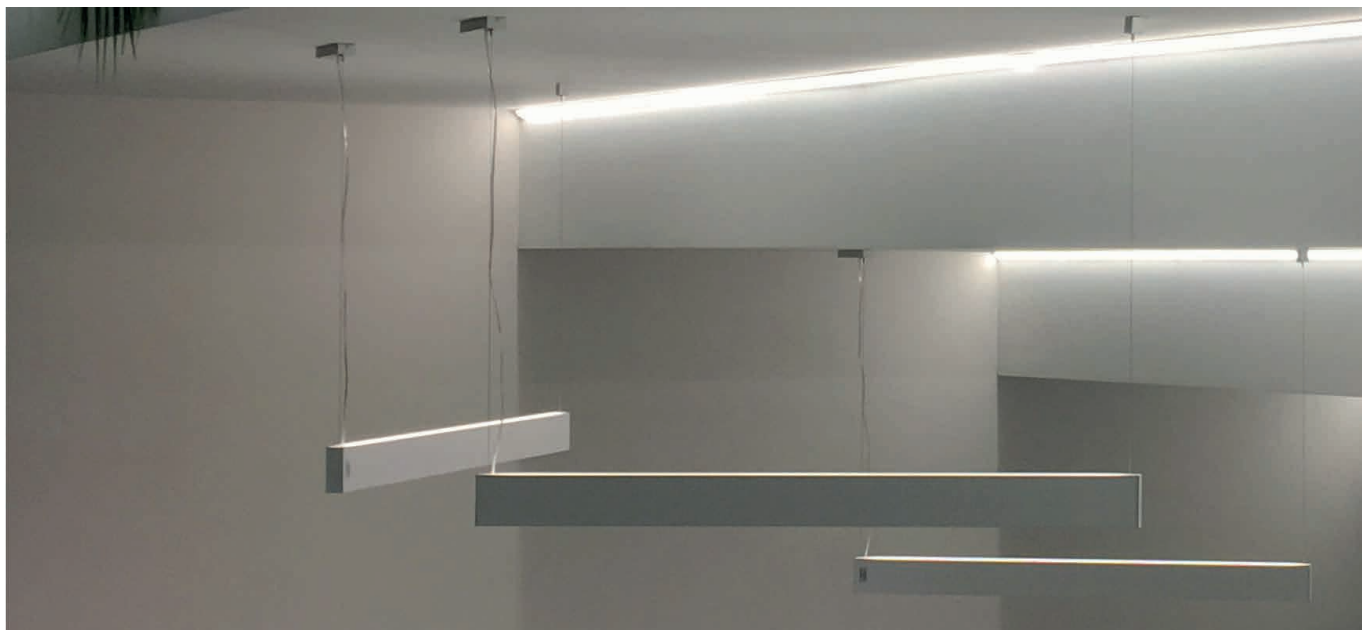


Decorated, anodised aluminium direct and indirect emission suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as primary technical decorative lighting for residential, commercial, office, retail and general lighting. 'Full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.



Constant 24Vdc voltage supply

Power supply included and integrated


 **MADE IN ITALY**

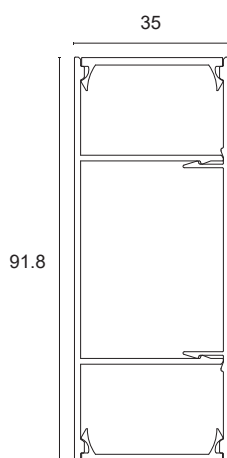

Profile section

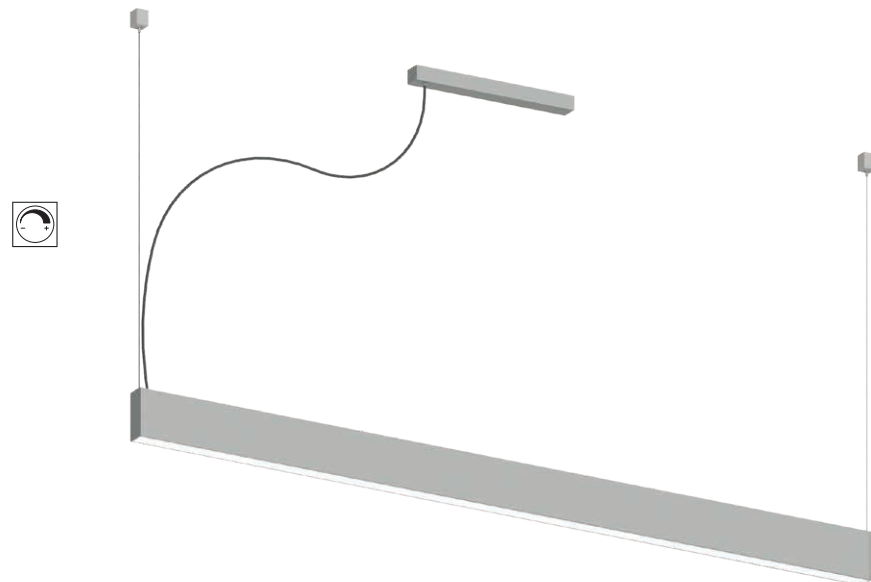

Ceiling rose size

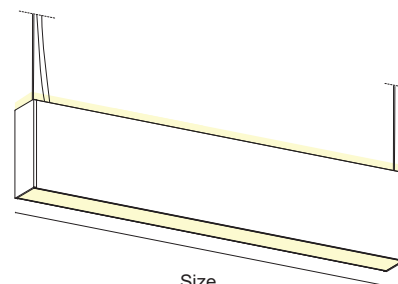

Size

BASIC CODES

K2.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium
- ☐ **8** Gold leaf
- ☐ **9** Bond Copper

*Other finishes on request.

CABLE

- ☐ **T** Transparent
- ☐ **B** White
- ☒ **N** Black

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90
- L+** 28W/m 3500Lm/m 160LED/m S2835 CRI>90
- M+** 40W/m 5000Lm/m 480LED/m S2835 CRI>90

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
 - S** BRUSHED
- *Indirect diffuser, brushed.

POWER SUPPLY

- N** ON/OFF
- D** DALI + PUSH


*The lamp can be customised with independent switch-on and dimming on request.

Code example:

KAPPA SUSPENSION + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: K2.1NGBCL+SN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA SUSPENSION AND REM PROJECTOR

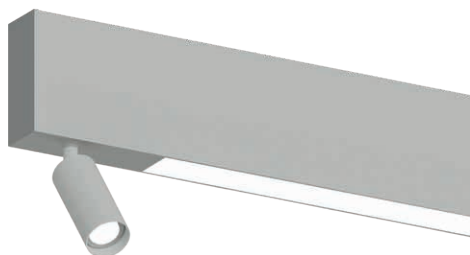


*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION AND DARK MODULE

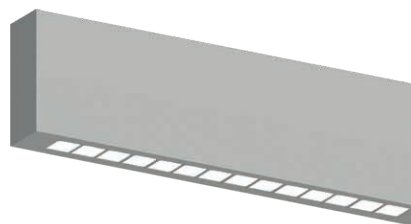

*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION, REM AND DARK MODULE

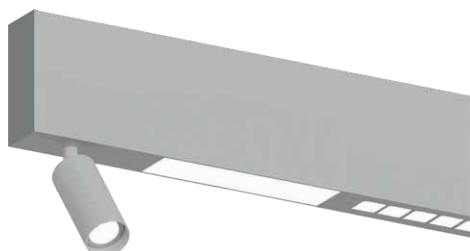

*Details on p. 276

MAGNETIC KAPPA SUSPENSION

K4.




Decorated, anodised aluminium direct and indirect emission suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as primary technical decorative lighting for residential, commercial, office, retail and general lighting. 'Full light' diffusion.

Suspension mounting with central magnetic ceiling rose, steel ropes and concealed screws; 3000 mm cable, choice of finish.



Constant 24Vdc voltage supply

Power supply included and integrated


 **MADE IN ITALY**

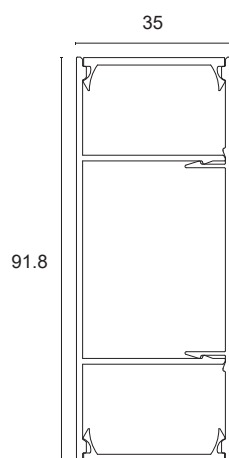

Profile section

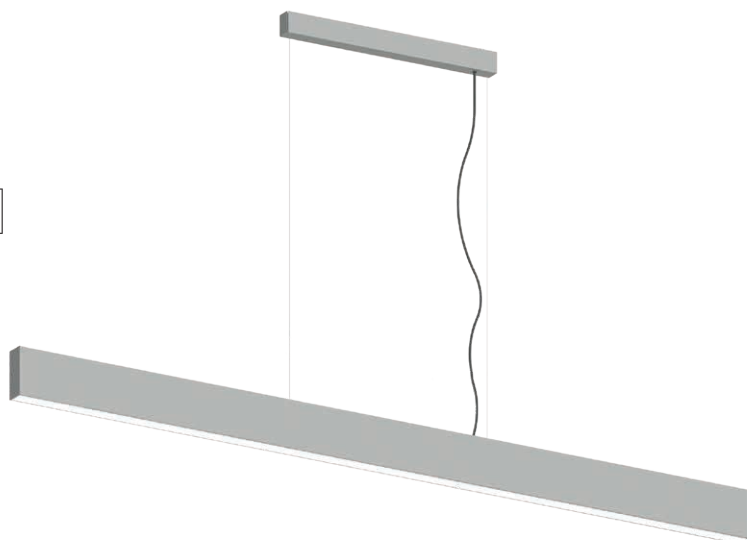

Ceiling rose size

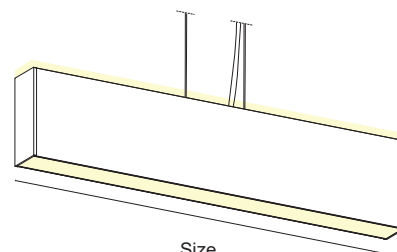

Size

BASIC CODES

K4.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium
- ☐ **8** Gold leaf
- ☐ **9** Bond Copper

*Other finishes on request.

CABLE

- ☐ **T** Transparent
- ☐ **B** White
- ☒ **N** Black

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90
- L+** 28W/m 3500Lm/m 160LED/m S2835 CRI>90
- M+** 40W/m 5000Lm/m 480LED/m S2835 CRI>90

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
 - S** BRUSHED
- *Indirect diffuser, brushed.

POWER SUPPLY

- N** ON/OFF
- D** DALI + PUSH


*The lamp can be customised with independent switch-on and dimming on request.

Code example:

SUSPENSION KAPPA MAGNETIC + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: K4.1NGBCL+SN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA SUSPENSION AND REM PROJECTOR

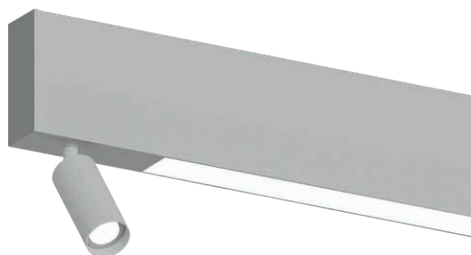


*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION AND DARK MODULE

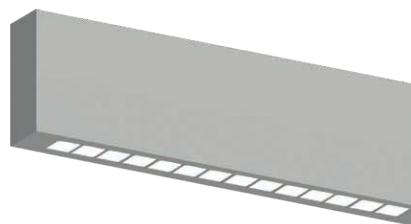

*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION, REM AND DARK MODULE

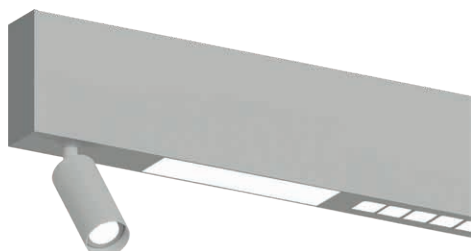

*Details on p. 276



LINEAR WALL SYSTEMS

KAPPA 1	198
JEY 5	200

KAPPA 1

K1.






Decorated anodised dual-emission aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Wall mounting with concealed brackets.

Constant voltage supply 24Vdc

Power supply included and integrated

 **MADE IN ITALY**

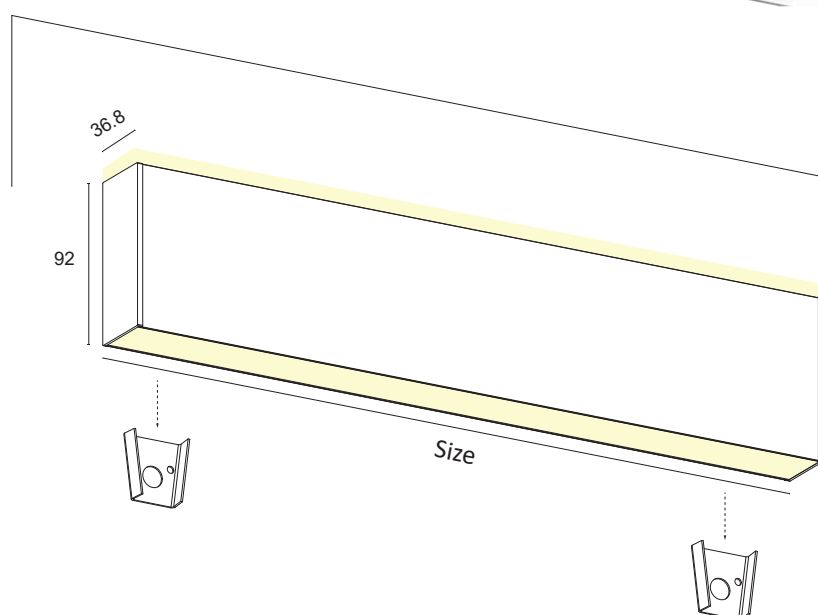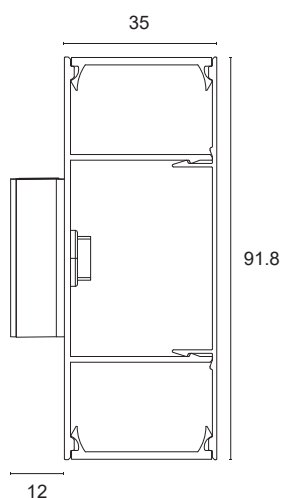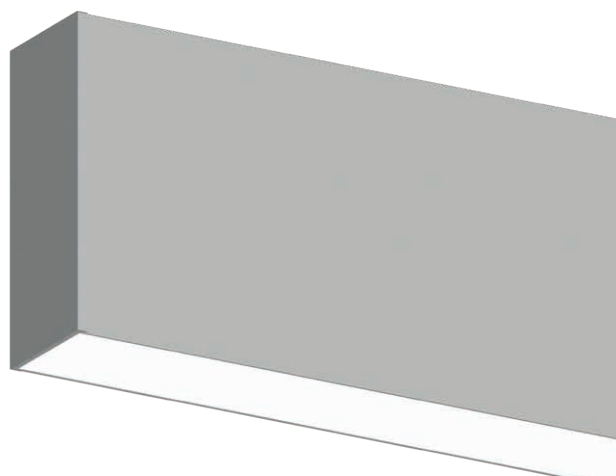

BASIC CODES

K1.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	
M+	40W/m	5000Lm/m	480LED/m	S2835	CRI>90	

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

POWER SUPPLY

- N** ON/OFF
- D** DALI + PUSH


*The lamp can be customised with independent switch-on and dimming on request.

Code example:

KAPPA 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser + ON/OFF = Code: K1.11HBCGSN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA WALL LIGHT AND REM PROJECTOR

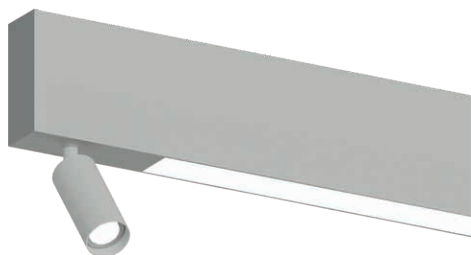


*Details on p. 276

EXAMPLE OF KAPPA WALL LIGHT AND DARK MODULE

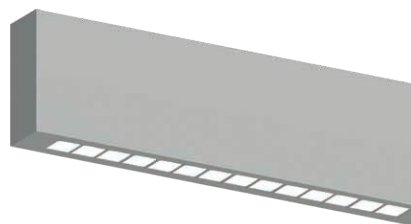

*Details on p. 276

EXAMPLE OF KAPPA WALL LIGHT, REM AND DARK MODULE

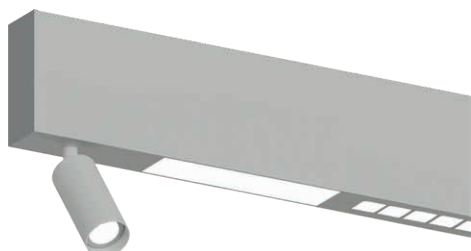

*Details on p. 276

JEY 5

J5.



Decorated anodised aluminium lamp complete with brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for decorative, accent, courtesy and general lighting.




Wall mounting with concealed screws.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**

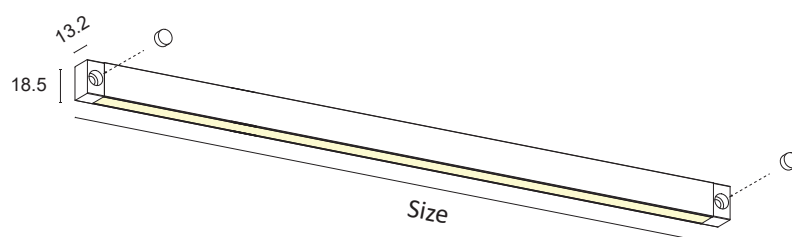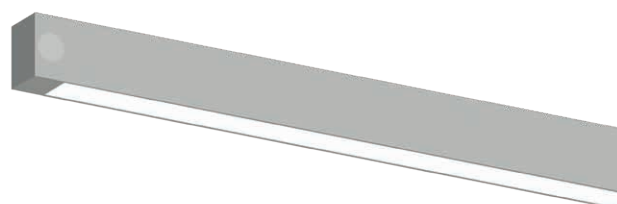

BASIC CODES

J5.

FINISHES

- ☐ **1** White
 - ☒ **2** Matt black
 - ☐ **7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **5** Grey
- ☐ **7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
D+	10W/m	1600Lm/m	112LED/m	S2835	CRI>90	
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
C1+	10W/m	1050Lm/m	LED COB		CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

JEY 5 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: J5.11HBCDS



DIRECTIONAL LINEAR SYSTEMS

DIRECTIONAL RHO	204
DIRECTIONAL DELTA	206

DIRECTIONAL RHO

R4.



Decorated anodised aluminium lamp complete with satin or microprismatic diffuser and high-brightness LED source with high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Ceiling mounting with directional steel brackets.




Constant voltage supply 24Vdc
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

 **MADE IN ITALY**



*On request IP54 or IP65

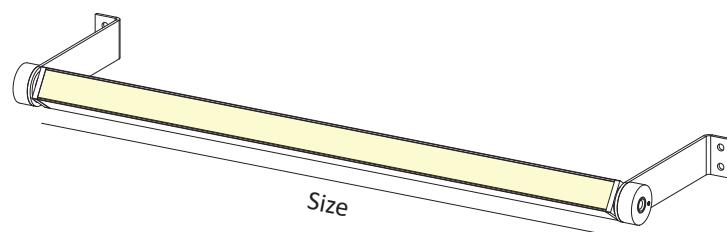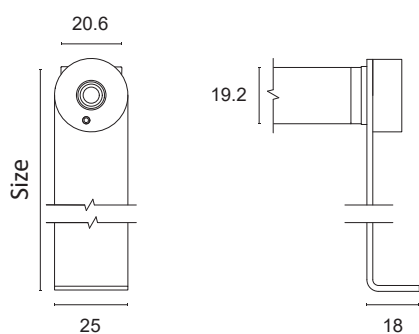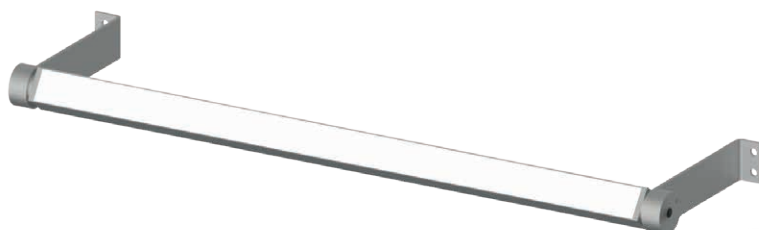

BASIC CODES

R4.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

BRACKET SIZE

- 1** 50mm
- 2** 100mm
- 3** 200mm

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

IP65	D65	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
IP54	E54	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
IP54	F54	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
	F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
	F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
	G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
	L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
	H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER


- M** MICROPRISMATIC
- S** BRUSHED

Code example:

RHO DIRECTIONAL + White + Bracket 100mm + 1000mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: R4.12HBCFS

DIRECTIONAL DELTA

D4

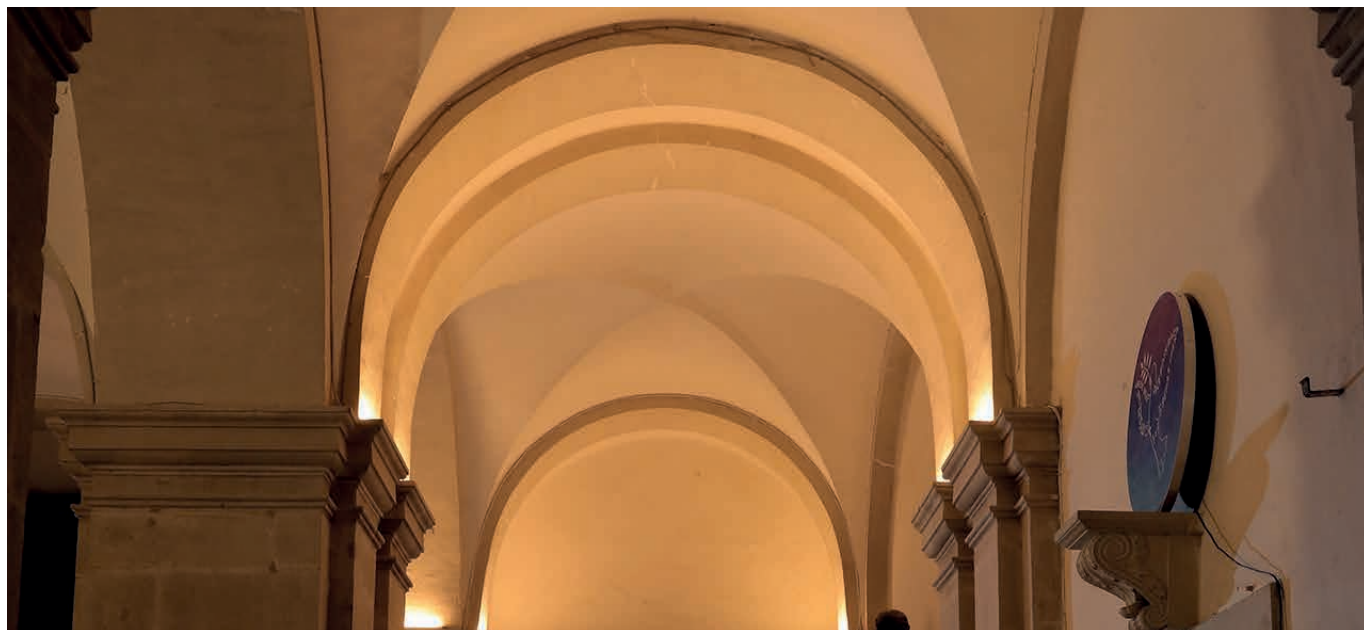

Decorated anodised aluminium lamp complete with satin or micropismatic diffuser and high-brightness LED source with high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Ceiling mounting with directional steel brackets.

Constant voltage supply 24Vdc
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**



*On request IP54 or IP65

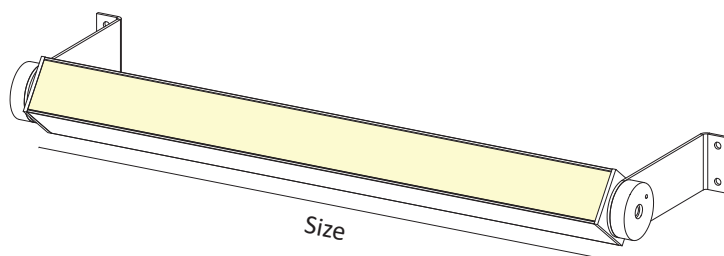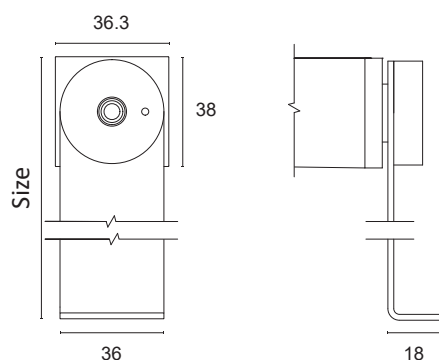

BASIC CODES

D4.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

BRACKET SIZE

- 1** 50mm
- 2** 100mm
- 3** 200mm

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

IP65	D65	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
IP54	E54	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
IP54	F54	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
	F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
	F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
	G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
	L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
	H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

Code example:

DELTA DIRECTIONAL + White + Bracket 100mm + 1000mm + 3000K + 20.2W/m CRI>85 + Satin Diffuser = Code: D4.12HBCFS



FLOOR LINEAR SYSTEM

YPSILON FLOOR LIGHT 210

YPSILON FLOOR LIGHT

Y3.



Decorated anodised aluminium lamp complete with floor-fitting brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. The interlocking profile mechanism allows for easy maintenance. Flush fitting in plasterboard, brickwork or floor.

Constant voltage supply 24Vdc

Parallel connection, 50 cm cable




Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**



*On request IP54 or IP65

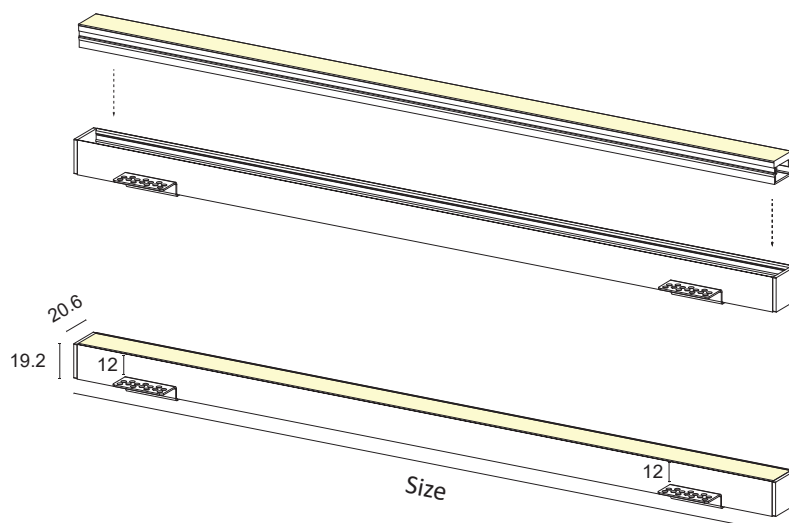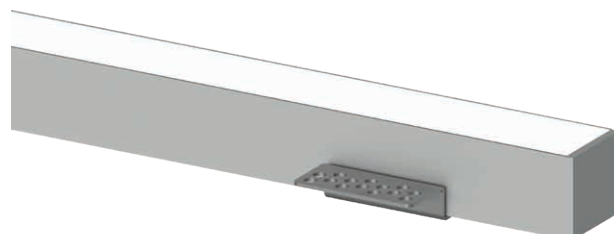

BASIC CODES

Y3.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **7** Brushed aluminium

SIZE

- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☒ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

IP65	D65	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
IP54	E54	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
	E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
	E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
	F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
	F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

YPSILON FLOOR LIGHT + White + Side supports white + 1000mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: Y3.11HBCFS



RGB SYSTEMS

SKY RGB	214
ALGOL RGB	215
HALLEY RGB	216
EOS RGB	217
BASIK 1 RGB	218
BASIK Q RGB	219
BIONIK 1 RGB	220
BIONIK Q RGB	221
FOUR HOLE RGB	222
FOUR HOLE Q RGB	223
DEHO 2 RGB	224
DEHO Q RGB	225
ACSO 1 RGB	226
VERTIGO RGB	227
DUVAR RGB	228

SKY RGB

L90.



Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating an RGB 'starry sky' effect. Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED

Power: 0.3W

Power supply with 12Vdc constant voltage control unit, only with CNL/RGB box


Mandatory connection with CNL/RGB box, cable 150 cm

Compulsory accessories for connection page 247

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L90.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome

LED COLOUR

 **RGB**

Code example:

SKY RGB + Chrome + RGB = Code: L90.6RGB

ALGOL RGB

L80.



Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating an RGB 'starry sky' effect. Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED


Power: 0.3W

Power supply with 12Vdc constant voltage control unit, only with CNL/RGB box


Mandatory connection with CNL/RGB box, cable 150 cm

Compulsory accessories for connection page 247

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L80.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome

LED COLOUR

 **RGB**

Code example:

ALGOL RGB + Chrome + RGB = Code: L80.6RGB

HALLEY RGB

L31.



Flush-fitted in polished aluminium for accent, decoration and courtesy RGB lighting. Also indicated for 'starry sky'.
Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED

Power: 0.3W

Power supply with 12Vdc constant voltage control unit, only with CNL/RGB box


Mandatory connection with CNL/RGB box, cable 150 cm

Compulsory accessories for connection page 247

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L31.

FINISHES

- ☐ **1** White
- ☒ **2** Matt black
- ☐ **6** Chrome
- ☐ **7** Brushed aluminium

GLASS

- ☒ **T** Transparent

LED COLOUR


 **RGB**

Code example:

HALLEY RGB + White + Clear Glass + RGB = Code: L31.1TRGB

EOS RGB

L95.

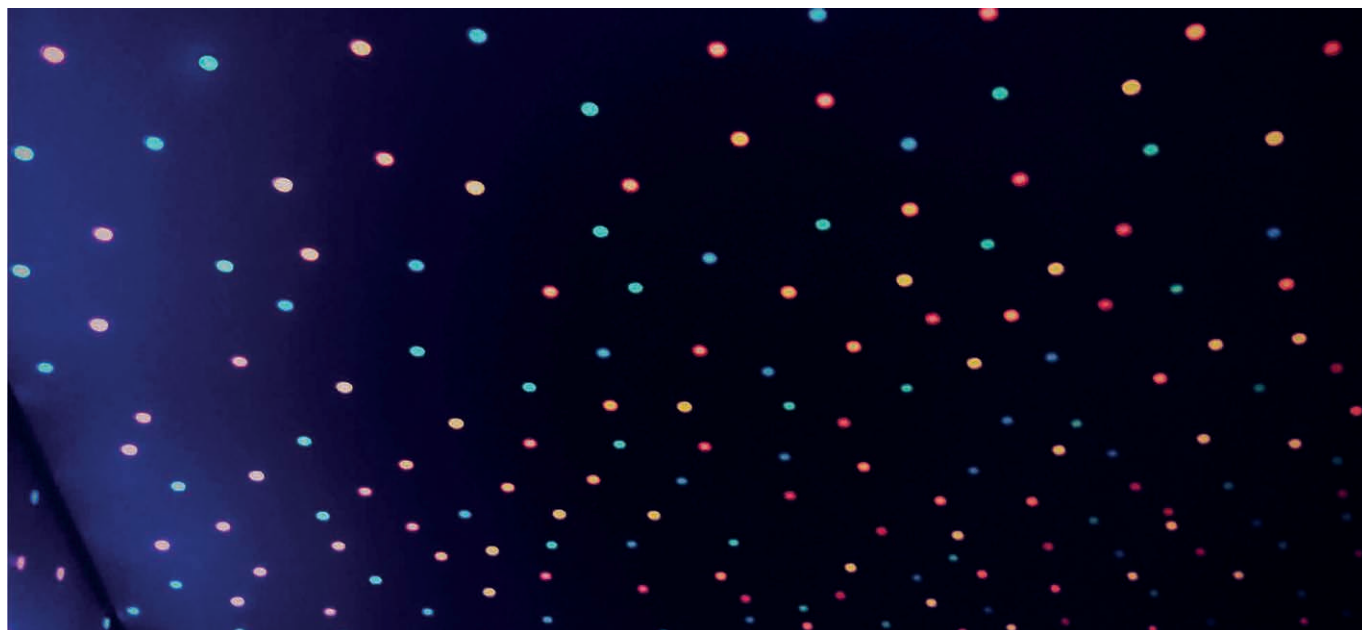

Flush-fitted in thermoplastic with power RGB for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80

Power: 3W@350mA


350mA constant current power supply

Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L95.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 3 Brushed gold
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium
- ☐ 8 Transparent
- ☐ 9 Polished gold

LIGHT BAND

- ☒ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

 **RGB**

Code example:

EOS RGB + Brushed Aluminium + 15° light beam + RGB = Code: L95.715RGB

BASIK 1 RGB

L01.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.


Power LED CRI>80

Power: 3W@350mA


350mA constant current power supply

Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L01.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BAND

- ☒ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

 **RGB**

Code example:

BASIK 1 RGB + Brushed Aluminium + 15° light beam + RGB = Code: L01.715RGB

BASIK Q RGB

L02.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA


350mA constant current power supply

Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L02.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BAND

- ☒ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

 **RGB**

Code example:

BASIK Q RGB + Brushed Aluminium + 15° light beam + RGB = Code: L02.715RGB

BIONIK 1 RGB

L21.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA


350mA constant current power supply

Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L21.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BAND

- ☒ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

 **RGB**

Code example:

BIONIK 1 RGB + Brushed Aluminium + 15° light beam + RGB = Code: L21.715RGB

BIONIK Q RGB

L22.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA


350mA constant current power supply

Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L22.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 6 Chrome
- ☐ 7 Brushed aluminium

LIGHT BAND

- ☒ 15 15°
- ☐ 25 25°
- ☐ 40 40°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

 **RGB**

Code example:

BIONIK Q RGB + Brushed Aluminium + 15° light beam + RGB = Code: L22.715RGB

FOUR HOLE RGB

L24.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA


350mA constant current power supply

Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L24.

FINISHES

- ☐ 1 White
- ☐ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 7 Brushed aluminium

LIGHT BAND

- ☐ 10 10°
- ☐ 35 35°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

 **RGB**

Code example:

FOUR HOLE RGB + White + 80° light beam + RGB = Code: L24.180RGB

FOUR HOLE Q RGB

L25.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80

Power: 3W@350mA


350mA constant current power supply

Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L25.

FINISHES

- ☐ 1 White
- ☒ 2 Matt black
- ☐ 5 Gloss aluminium
- ☐ 7 Brushed aluminium

LIGHT BAND

- ☒ 10 10°
- ☐ 35 35°
- ☐ 60 60°
- ☐ 80 80°

LED COLOUR

 **RGB**

Code example:

FOUR HOLE Q RGB + White + 80° light beam + RGB = Code: L25.180RGB

DEHO 2 RGB

L402.



Polished 304 steel casing with powerful RGB LEDs suitable for decorative lighting and as step markers.
Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 3W@350mA

350mA constant current power supply


Series connection, with 70 + 70 cm cables

Installation accessories page 271

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L402.

LIGHT BAND

	15	15°
	25	25°
	40	40°
	60	60°
	80	80°

GLASS

 **T** Transparent

LED COLOUR

 **RGB**

Code example:

DEHO 2 RGB + Light Beam 25° + Clear Glass + RGB = Code: L402.25TRGB

DEHO Q RGB

L405.



Polished 304 steel casing with powerful RGB LEDs suitable for decorative lighting and as step markers.
Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 3W@350mA

350mA constant current power supply


Series connection, with 70 + 70 cm cables

Installation accessories page 271

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L405.

LIGHT BAND

-  **15** 15°
-  **25** 25°
-  **40** 40°
-  **60** 60°
-  **80** 80°

GLASS

-  **T** Transparent

LED COLOUR

 **RGB**

Code example:

DEHO Q RGB + Light Beam 25° + Clear Glass + RGB = Code: L405.25TRGB

ACSO 1 RGB

L601.



Polished 304 steel casing with powerful RGB LEDs suitable for decorative lighting and as step markers.
Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 3W@350mA

350mA constant current power supply


Series connection, with 70 + 70 cm cables

Installation accessories page 270

Accessories for RGB management page 249



 **MADE IN ITALY**



BASIC CODES

L601.

LIGHT BAND

	15	15°
	25	25°
	40	40°
	60	60°
	80	80°

GLASS

 **T** Transparent

LED COLOUR


 **RGB**

Code example:

ACSO 1 RGB + Light Beam 25° + Clear Glass + RGB = Code: L601.25TRGB

VERTIGO RGB

L14.

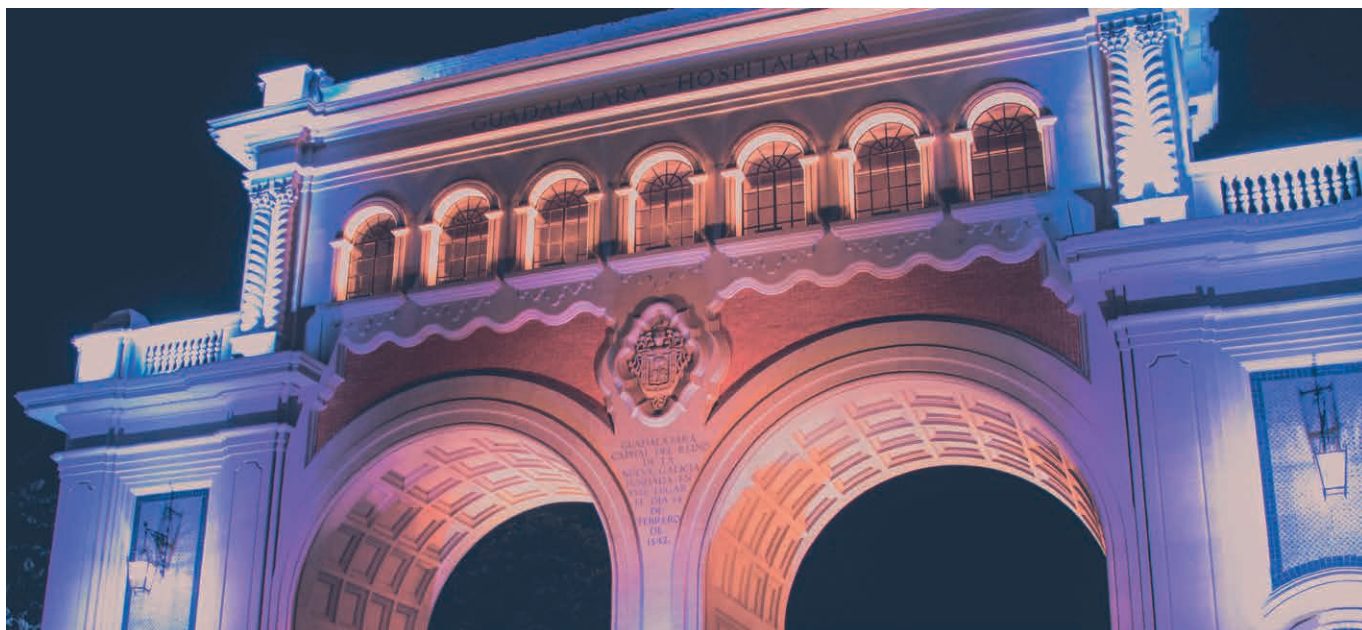

Directional projector made of polished aluminium with powerful RGB LEDs suitable for illuminating architectural facades, shop windows or gardens. Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors, with screw brackets.

Power LED CRI>80

Power: 3W@350mA

350mA constant current power supply


Series connection, with 70 + 70 cm cables

Installation accessories page 272

Accessories for RGB management page 249



 **MADE IN ITALY**

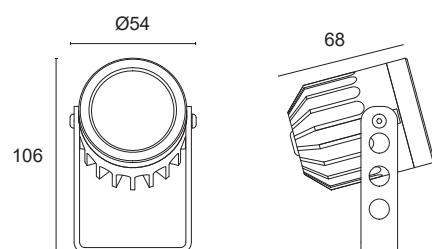

BASIC CODES

L14.

FINISHES

-  **2** Matt black
-  **7** Brushed aluminium

LIGHT BAND

-  **10** 10°
-  **35** 35°
-  **60** 60°
-  **80** 80°

LED COLOUR

 **RGB**

Code example:

VERTIGO RGB + Brushed Aluminium + 10° light beam + RGB = Code: L14.710RGB

DUVAR RGB

L23.



Directional projector made of polished aluminium with powerful RGB LEDs suitable for decorative lighting of architectural facades, shop windows or gardens. Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors, with screw brackets, base or spike.

Power LED CRI>80

Power: 3W@350mA

350mA constant current power supply


Series connection, with 70 + 70 cm cables

Installation accessories page 272

Accessories for RGB management page 249



 **MADE IN ITALY**

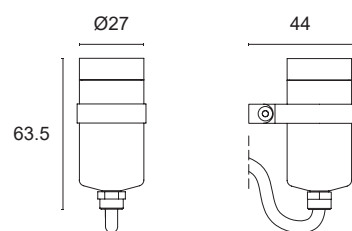

BASIC CODES

L23.

FINISHES

-  **2** Matt black
-  **7** Brushed aluminium

LIGHT BAND

-  **15** 15°
-  **25** 25°
-  **35** 35°

LED COLOUR

 **RGB**

Code example:

DUVAR RGB + Brushed Aluminium + 15° light beam + RGB = Code: L23.715RGB






POWER SUPPLIES


350mA CONSTANT CURRENT	232
500mA CONSTANT CURRENT	233
CONSTANT CURRENT FOR COB	234
MULTICURRENT	235
CONSTANT VOLTAGE 12Vdc	236
CONSTANT VOLTAGE 24Vdc	237
CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH	239
EMERGENCY DEVICE	241

350mA CONSTANT CURRENT


CODE	DESCRIPTION
AL35004IP	Power supply ON/OFF constant current 350mA 4W IN/OUT cables, IP65 Vin 220-240Vac 1 to 3 LEDs Dimensions mm 38x28x22H




CODE	DESCRIPTION
AL141132	Power supply ON/OFF constant current 350mA 8W Protected screw terminals, IP20 Vin 110-240Vac 1 to 7 LEDs Sizes mm 59x42x22H




CODE	DESCRIPTION
AL127303	Power supply ON/OFF constant current 350mA 10W Protected screw terminals, IP20 Vin 110-240Vac 1 to 9 LEDs Sizes mm 112x38x22H



CODE	DESCRIPTION
AL1435IP	Power supply ON/OFF constant current 350mA 14W IN/OUT cables, IP67 Vin 220-240Vac 1 to 12 LEDs Sizes mm 70x38x25H



CODE	DESCRIPTION
AL127713	Power supply ON/OFF constant current 350mA 14.5W Protected screw terminals, IP20 Vin 110-240Vac 1 to 12 LEDs Sizes mm 115x34x20H




500mA CONSTANT CURRENT

CODE	DESCRIPTION
------	-------------

AL50004IP


Power supply ON/OFF constant current
500mA 4W
IN/OUT cables, IP65
Vin 220-240Vac
1 to 2 LEDs
Dimensions mm 38x28x22H



CODE	DESCRIPTION
------	-------------

AL141131


Power supply ON/OFF constant current
500mA 6W
Protected screw terminals, IP20
Vin 110-240Vac
1 to 3 LEDs
Sizes mm 59x42x22H



CODE	DESCRIPTION
------	-------------

AL127711


Power supply ON/OFF constant current
500mA 12W
Protected screw terminals, IP20
Vin 110-240Vac
1 to 7 LEDs
Sizes mm 115x35x20H



CODE	DESCRIPTION
------	-------------

AL1450IP


Power supply ON/OFF constant current
500mA 14W
IN/OUT cables, IP67
Vin 220-240Vac
1 to 7 LEDs
Sizes mm 70x38x25H



CODE	DESCRIPTION
------	-------------

AL50020IP


Power supply ON/OFF constant current
500mA 17.5W
IN/OUT cables, IP67
Vin 110-240Vac
2 to 10 LEDs
Sizes mm 118x35x26H



CODE	DESCRIPTION
------	-------------

AL122248


Power supply ON/OFF constant current
500mA 20W
Protected screw terminals, IP20
Vin 110-240Vac
1 to 12 LEDs
Sizes mm 112x38x27H





CODE	DESCRIPTION
------	-------------


AL50022IP


Power supply ON/OFF constant current
500mA 22W
IN/OUT cables, IP65
Vin 110-240Vac
3 to 10 LEDs
Sizes mm 80x73x30H






CONSTANT CURRENT FOR COB

CODE	DESCRIPTION	CODE	DESCRIPTION
AL20009	Power supply ON/OFF constant current 200mA 9W IN/OUT cables, IP20 Vin 220-240Vac Sizes mm 48x34x24H	AL1020IP	Power supply ON/OFF constant current 200mA 8W IN/OUT cables, IP67 Vin 220-240Vac Sizes mm 70x38x25H
			


CODE	DESCRIPTION
AL25012	Power supply ON/OFF constant current 250mA 10W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 100x38x25H
	

CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
AL45018.MULTI	Multicurrent ON/OFF power supply 200-450mA 18.9W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 98x44x30H	200mA 8.4W 240mA - 10.1W 300mA - 12.6W 350mA 14.7W 400mA - 16.8W 450mA 18.9W	24-42Vdc - 18.9W
			



CODE	DESCRIPTION	CONSTANT CURRENT
AL105042.D2	Multicurrent Power Supply DIMMABLE DALI2 and PUSH 150-1050mA 42W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 131x43x30H	150mA - 7.8W 200mA - 10.4W 250mA - 13W 300mA - 15.6W 350mA - 18.2W 400mA - 20.8W 500mA - 26W 600mA - 31.2W 700mA - 36.4W 750mA - 39W 800mA - 41.6W 850mA - 41.65W 900mA - 41.4W 950mA - 41.8W 1000mA - 42W
		

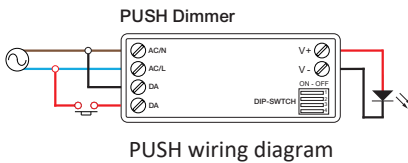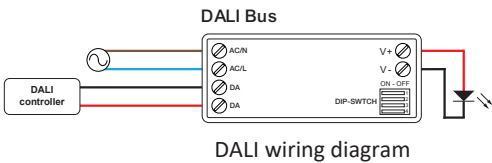

CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
AL122201	Multicurrent ON/OFF power supply 250-700mA 20W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 112x52x22H	250mA - 13W min 3 - max 16 LEDs 350mA - 19W min 1 - max 16 LEDs 400mA - 20W min 1 - max 15 LEDs 450mA - 20W min 1 - max 13 LEDs 500mA - 20W min 1 - max 12 LEDs 550mA - 20W min 1 - max 11 LEDs 600mA - 20W min 1 - max 10 LEDs 700mA - 20W min 1 - max 9 LEDs	24Vdc - 16W





CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
AL125400	Multicurrent Power Supply PUSH DIMMABLE 250-900mA 20W Protected pressure terminals, IP20 Vin 110-240Vac Sizes mm 112x52x22H	250mA - 13W min 6 - max 16 LEDs 300mA - 15W min 6 - max 16 LEDs 350mA - 18W min 4 - max 15 LEDs 400mA - 20W min 4 - max 15 LEDs 450mA - 20W min 1 - max 14 LEDs 500mA - 20W min 1 - max 12 LEDs 550mA - 20W min 1 - max 11 LEDs 600mA - 20W min 1 - max 10 LEDs 650mA - 20W min 1 - max 9 LEDs 700mA - 20W min 1 - max 9 LEDs 750mA - 20W min 1 - max 8 LEDs 800mA - 20W min 1 - max 7 LEDs 850mA - 20W min 1 - max 7 LEDs 900mA - 20W min 1 - max 7 LEDs	12Vdc - 11W 24Vdc - 20W




PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT CURRENT
AL70012.D2	Multicurrent Power Supply DIMMABLE DALI2 and PUSH 150-700mA 12W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 120x30x20H	150mA - 6.3W min 1 - max 13 LEDs 200mA - 8.4W min 1 - max 13 LEDs 250mA - 10.5W min 1 - max 13 LEDs 300mA - 12W min 1 - max 12 LEDs 350mA - 12W min 1 - max 10 LEDs 500mA - 12W min 1 - max 7 LEDs 600mA - 12W min 1 - max 6 LEDs 700mA - 12W min 1 - max 5 LEDs

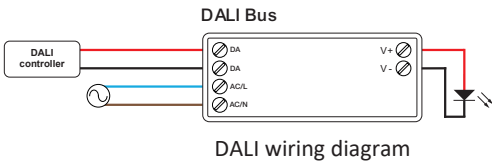


DALI wiring diagram

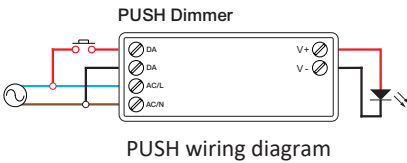


PUSH wiring diagram

CONSTANT VOLTAGE 12Vdc


CODE	DESCRIPTION
AL12004	Constant voltage power supply ON/OFF 12Vdc 4W IN/OUT cables, IP65 Vin 220-240Vac Dimensions mm 38x27x21H




CODE	DESCRIPTION
AL12015	Constant voltage power supply ON/OFF 12Vdc 15W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL12020	Constant voltage power supply ON/OFF 12Vdc 20W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL12030B	Constant voltage power supply ON/OFF 12Vdc 30W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 155x50x16H




CODE	DESCRIPTION
AL12035IP	Constant voltage power supply ON/OFF 12Vdc 36W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 148x40x30H




CODE	DESCRIPTION
AL12050	Constant voltage power supply ON/OFF 12Vdc 50W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 160x58x18H




CODE	DESCRIPTION
AL12075	Constant voltage power supply ON/OFF 12Vdc 75W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 175x58x16H




CODE	DESCRIPTION
AL12100	Constant voltage power supply ON/OFF 12Vdc 100W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 205x58x18H



CODE	DESCRIPTION
AL12100IP	Constant voltage power supply ON/OFF 12Vdc 100W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 190x52x37H




CODE	DESCRIPTION
AL12150	Constant voltage power supply ON/OFF 12Vdc 150W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 210x67x34H




CONSTANT VOLTAGE 24Vdc


CODE	DESCRIPTION
AL24015	Constant voltage power supply ON/OFF 24Vdc 15W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL24020	Constant voltage power supply ON/OFF 24Vdc 20W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL24030B	Constant voltage power supply ON/OFF 24Vdc 30W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 154x50x14,3H




CODE	DESCRIPTION
AL24035IP	Constant voltage power supply ON/OFF 24Vdc 35W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 148x40x30H




CODE	DESCRIPTION
AL24050B	Constant voltage power supply ON/OFF 24Vdc 50W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 175x58x16H




CODE	DESCRIPTION
AL24060	Constant voltage power supply ON/OFF 24Vdc 60W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 160x58x18H




CODE	DESCRIPTION
AL24060IP	Constant voltage power supply ON/OFF 24Vdc 60W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 162x43x32H




CODE	DESCRIPTION
AL24060S	Constant voltage power supply ON/OFF 24Vdc 60W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 305x30x18H




CODE	DESCRIPTION
AL24075	Constant voltage power supply ON/OFF 24Vdc 75W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 175x58x16H




CODE	DESCRIPTION
AL24075S	Constant voltage power supply ON/OFF 24Vdc 75W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 400x32x21,6H



CODE	DESCRIPTION
AL24075X	Constant voltage power supply ON/OFF 24Vdc 75W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 158x38x30H




CODE	DESCRIPTION
AL24100	Constant voltage power supply ON/OFF 24Vdc 100W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 184x61x32H




CONSTANT VOLTAGE 24Vdc


CODE	DESCRIPTION
AL24100B	Constant voltage power supply ON/OFF 24Vdc 100W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 177x57x18H




CODE	DESCRIPTION
AL24100IP	Constant voltage power supply ON/OFF 24Vdc 100W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 140x63x32H




CODE	DESCRIPTION
AL24100S	Constant voltage power supply ON/OFF 24Vdc 100W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 251x30x16H




CODE	DESCRIPTION
AL24120	Constant voltage power supply ON/OFF 24Vdc 120W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 227x38x30H




CODE	DESCRIPTION
AL24150	Constant voltage power supply ON/OFF 24Vdc 150W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 179,4x62,5x31H




CODE	DESCRIPTION
AL24150IP	Constant voltage power supply ON/OFF 24Vdc 150W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 180x63x35H




CODE	DESCRIPTION
AL24150S	Constant voltage power supply ON/OFF 24Vdc 150W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 301x30x16H




CODE	DESCRIPTION
AL24200	Constant voltage power supply ON/OFF 24Vdc 200W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 195x67x32H




CODE	DESCRIPTION
AL24200IP	Constant voltage power supply ON/OFF 24Vdc 200W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 199x63x36H






CODE	DESCRIPTION
AL24240S	Constant voltage power supply ON/OFF 24Vdc 240W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 357x32x23H









CODE	DESCRIPTION
AL24250	Constant voltage power supply ON/OFF 24Vdc 250W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 195x67x31H



CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH


CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24045.D2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 168x38x30H	24Vdc - 45W
 30 168 38 DALI Bus  DALI controller DALI wiring diagram PUSH Dimmer  PUSH wiring diagram		

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24060.SD2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 362x30x21H	24Vdc - 60W
 21 362 30 DALI Bus  DALI controller DALI wiring diagram PUSH Dimmer  PUSH wiring diagram		

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24080.D2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 227x38x30H	24Vdc - 80W
 30 227 38 DALI Bus  DALI controller DALI wiring diagram PUSH Dimmer  PUSH wiring diagram		


CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24150.D2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 318x38x30H	24Vdc - 150W



30
318
38

DALI Bus




DALI wiring diagram

PUSH Dimmer



PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24150.SD2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 337x30x18H	24Vdc - 150W




18
337
30

DALI Bus







DALI wiring diagram

PUSH Dimmer



PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
L1241	Emergency lighting power supply with instant switch on if mains power fails. The device has combined operation for both continuous and emergency lighting. Suitable for power LEDs (max. 4W) or LED modules (12Vdc). Measurements of Power Supply mm 105x46x24H Measurements of Battery mm 90x45x23H	1W 350mA 4h autonomy 2W 350mA 3h autonomy 3W 350mA 2h autonomy	12Vdc - 3.6W 1h autonomy 12Vdc - 1.8W 2h autonomy 12Vdc - 1.2W 3h autonomy
Power supply  Battery 			

CODE	DESCRIPTION	DIP-SWITCH POSITION A	DIP-SWITCH POSITION B
EL6171	Emergency lighting only power supply with instant switch on if mains power fails. The device only operates continuously when combined with dimmable power controls. DIP-SWITCH adjustable version, for 350mA power LEDs or 12Vdc-24Vdc LED modules. Battery life 1h. Measurements of Power Supply mm 156x52x26H Measurements of Battery mm 135x45x23H	12Vdc - 24W 350mA	24Vdc - 48W 350mA
Power supply  Battery 			




CONNECTION SYSTEMS

SERIES CONNECTION	244
PARALLEL CONNECTION	245
SERIES-PARALLEL CONNECTION	246
RGB CONNECTION	247

SERIES CONNECTION ACCESSORIES


SERIES connection boxes solely for power LEDs, suitable for easy installation and observing correct polarity. Available in three versions with three, four and six inputs. Boxes can also be connected to each other to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNL/03




SERIES connection box solely for three-input power LEDs. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/03J




SERIES connection box solely for three-input power LEDs with connector on cable for connection to another box. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/04




SERIES connection box solely for four-input power LEDs. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/04J




SERIES connection box solely for four-input power LEDs with connector on cable for connection to another box. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/06



SERIES connection box solely for six-input power LEDs. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/06J




SERIES connection box solely for six-input power LEDs with connector on cable for connection to another box. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

P300



A closing bridge must be used if not all the Box inputs are used by the LEDs.


EXAMPLE OF USE WITH SINGLE BOX

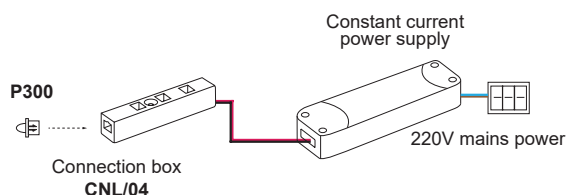

P300

A closing bridge must be used if not all the Box inputs are used by the LEDs.

EXAMPLE OF USE WITH MULTIPLE BOXES

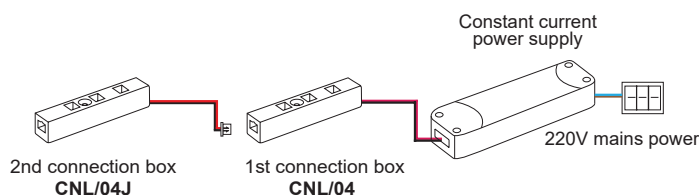

N.B.:

Boxes can also be connected to each other to expand the system. When connecting the boxes to each other, it should be noted that one input of the first box will be occupied by the connector of the second box.


EXAMPLE

Using a CNL/04 as the first box and a CNL/04J as the second box will not result in a total of eight inputs, but seven.

PARALLEL CONNECTION ACCESSORIES


PARALLEL connection box solely for ALGOL model Microspots or large sections of monochrome LED strips. The box makes installation easier while observing the correct polarity. Available in a six-input version. Several boxes can be connected to the same power supply to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNP




PARALLEL connection box solely for ALGOL model Microspots or large sections of monochrome LED strips. The circuit CLOSING BRIDGE is not necessary.

EXAMPLE OF USE WITH SINGLE BOX

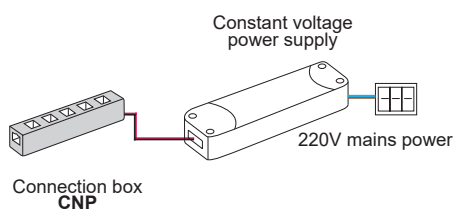


EXAMPLE OF USE WITH MULTIPLE BOXES

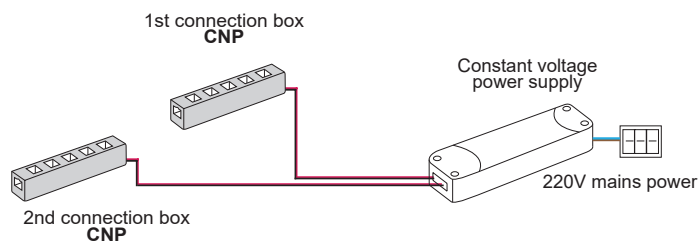

SERIES-PARALLEL CONNECTION ACCESSORIES


SERIES-PARALLEL connection box solely for Microspot models DUST and SKY. The boxes must be used when installing and operating spotlights. Available in a six-input version. A multiplier box can be used to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNTG




Box required for SERIES-PARALLEL connection of DUST and SKY microspots. Only three or six Microspots can be connected to the box.

CNTG/J




Box required for SERIES-PARALLEL connection of DUST and SKY microspots. Only three or six Microspots can be connected to the box. The box is equipped with a multiplier connector.

CNTG/M




Multiplier box for system expansion with Microspot DUST and SKY. Up to six CNTG/J boxes can be connected to the box.


EXAMPLE OF USE WITH SINGLE BOX

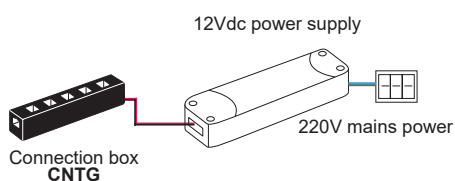

EXAMPLE OF USE WITH MULTIPLE BOXES

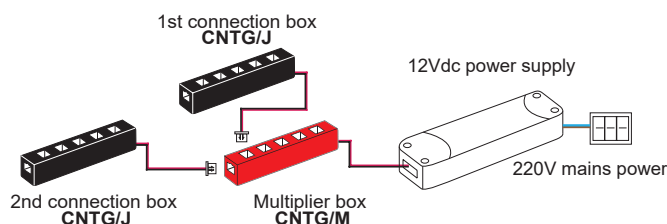


CNTG/18




Box required for SERIES-PARALLEL connection of DUST and SKY microspots. Only three or multiples of three Microspots can be connected to the box.

CNTG/18J




Box required for SERIES-PARALLEL connection of DUST and SKY microspots. Only three or multiples of three Microspots can be connected to the box. The box is equipped with a multiplier connector.

CNTG/M




Multiplier box for system expansion with Microspot DUST and SKY. Up to six CNTG/18J boxes can be connected to the box.

EXAMPLE OF USE WITH SINGLE BOX

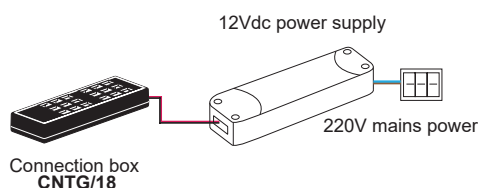


EXAMPLE OF USE WITH MULTIPLE BOXES

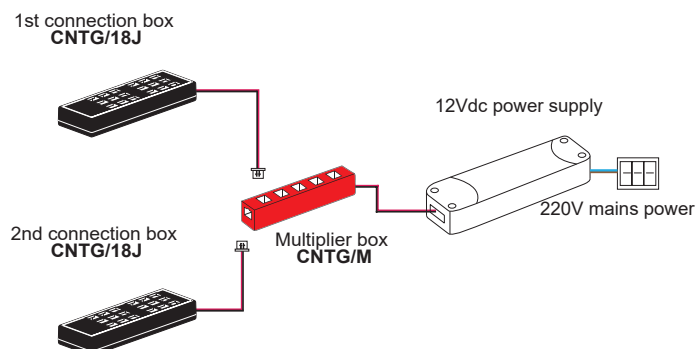

SERIES CONNECTION RGB


Connection box solely for Microspot models SKY RGB, ALGOL RGB and HALLEY RGB. The boxes must be used when installing and operating spotlights. Available in a six-input version. A multiplier box can be used to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNL/RGB




Mandatory box for connection of the Microspots SKY RGB, ALGOL RGB and HALLEY RGB. One to six microspots can be connected to the same box.

CNL/RGBJ




Mandatory box for connection of the Microspots SKY RGB, ALGOL RGB and HALLEY RGB. One to six microspots can be connected to the same box. The box is equipped with a multiplier connector.

CNL/RGBM




Multiplier box to be used for system expansion with Microspot DUST and SKY. Up to six CNL/RGBJ boxes can be connected to this box.

EXAMPLE OF USE WITH SINGLE BOX

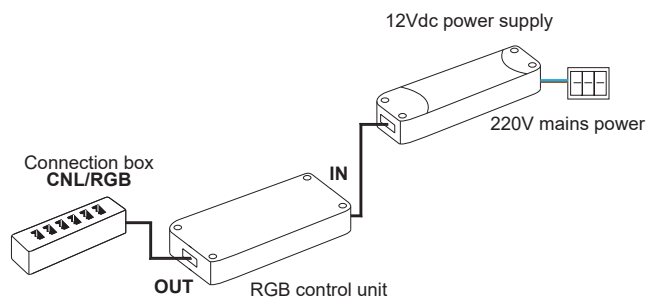

EXAMPLE OF USE WITH MULTIPLE BOXES

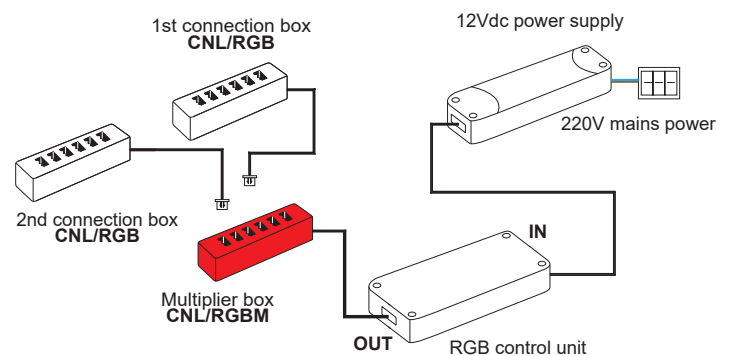



CONTROL SYSTEMS

SK-V1 CONTROL UNIT.....	250
RF.001 CONTROL UNIT.....	251
SR-1029 CONTROL UNIT.....	252
RFL20K CONTROL UNIT.....	253
SR-1029W CONTROL UNIT.....	254
1009FA3 CONTROL UNIT.....	255
DLM1224-1CV CONTROL UNIT.....	256
MINI-1CV CONTROL UNIT.....	257
MINI-1CV-DALI CONTROL UNIT.....	258
MINI-1CV-CASAMBI CONTROL UNIT.....	259
LINE-5CV CONTROL UNIT.....	260
DLX1224-4CV-DALI CONTROL UNIT.....	261
LINE 5CV-CASAMBI CONTROL UNIT.....	262
DLC1248-1CC350 CONTROL UNIT.....	263
DLC1248-1CC500 CONTROL UNIT.....	263
DLX1224-4CC350 CONTROL UNIT.....	264
DLX1224-4CC500 CONTROL UNIT.....	264
VOLUMETRIC SENSOR.....	265
INFRARED SENSOR.....	265
TOUCH SENSOR.....	265
TOUCH MINI SENSOR.....	266
TOUCH DIMMER SENSOR.....	266
MINI MOTION DETECTOR SENSOR.....	267
TOUCH SENSOR SWITCH SENSOR.....	267
IR SENSOR SWITCH SENSOR.....	267



SK-V1 control unit

Professional multifunctional control unit with PUSH or radio remote control for monochrome strips. Active memory function. A remote control or button can be combined with several control units to expand the system

Power supply voltage: $V_{in} = V_{out} - 5...36Vdc$

Output current: 1x8A - 5...36Vdc

Power rating: 40W@5Vdc - 96W@12Vdc - 192W@24Vdc - 288W@36Vdc

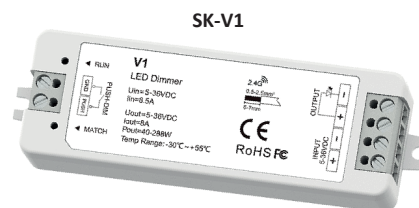

SK-R11

Radio remote control for monochrome LEDs

Radio remote control with magnetic or screw base for switching on, adjusting and switching off.




SK-R1-1W

Radio remote control for dynamic white LED


Round white Touch radio remote control with magnetic base or screw base for switching on, adjusting and switching off.



EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH A CONTROL UNIT

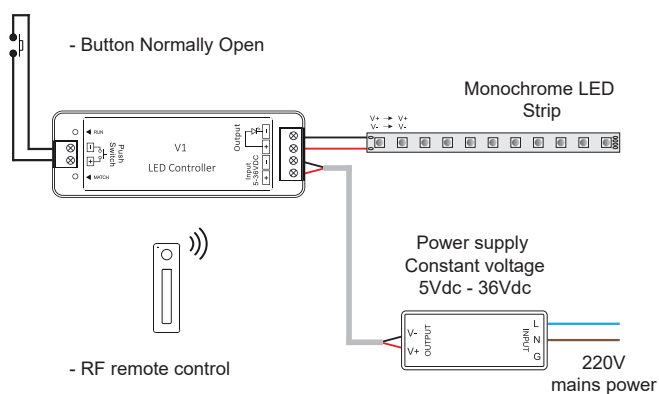

EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH TWO CONTROL UNITS

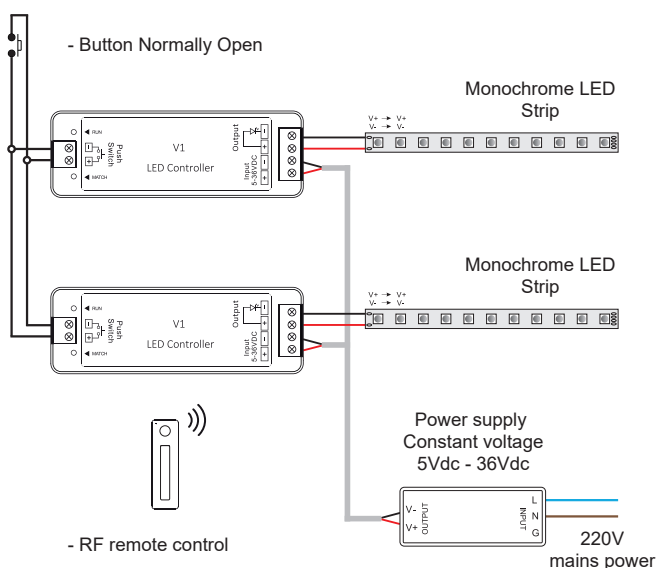


RF.001 control unit

One-channel control unit for 12Vdc or 24Vdc constant voltage control of monochrome LED strips, radio remote control included. On/off, dimmer and active memory function. Possibility of expanding the system with up to nine RF.AMF amplifiers. Installation in unshielded indoor locations.


Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 8A - 12/24Vdc


Power rating: 96W@12Vdc - 192W@24Vdc



EXAMPLE OF MONOCHROME LED STRIP CONTROL

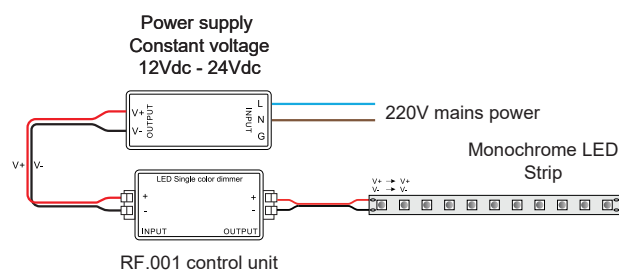

EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH RF.AMF AMPLIFIER

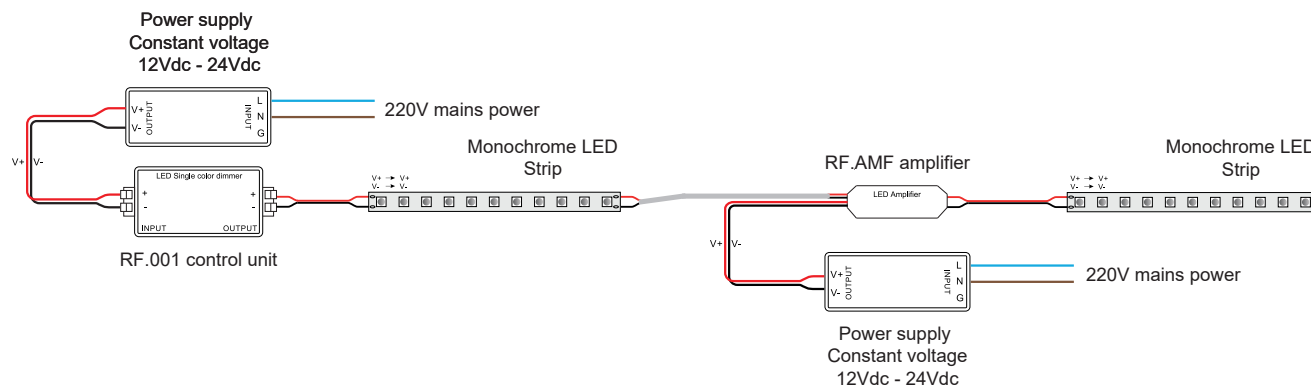

SR-1029 control unit


Professional three-channel control unit for constant voltage 12Vdc or 24Vdc control of monochrome, dynamic white or RGB LED strips. Simple, intuitive pairing system between control units and radio remote controls. A remote control can be combined with several control units to expand the system Installation in unshielded indoor locations.

Active memory function.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 3x5A - 12/24Vdc

Power rating: 3x60W@12Vdc - 3x120W@24Vdc



SR-2839

Radio remote control for monochrome LEDs

Quick, precise light intensity selection and control via the round mini-touch panel. Two pre-set scenes can be stored. Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%. Possibility of coupling the same radio control unit to several control units. Maximum operating distance 20 metres.



SR-2839CCT

Radio remote control for dynamic white LED

Quick, precise colour temperature selection and adjustment via the mini round touch panel. Light intensity adjustment via two buttons. Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%. Two pre-set scenes can be stored. Possibility of coupling the same radio control unit to several control units. Maximum operating distance 20 metres.




SR-2839RGB

Radio remote control for RGB LEDs


Quick, precise colour selection and adjustment via the mini round touch panel. Adjustment of light intensity of the chosen colour via a single button. Adjustment of light intensity of the primary colours via three buttons. Preset scene selection via single button. Possibility of adjusting the speed of scenes. Possibility of coupling the same radio remote control unit to several control units. Maximum operating distance 20 metres.




EXAMPLE OF MONOCHROME LED STRIP CONTROL

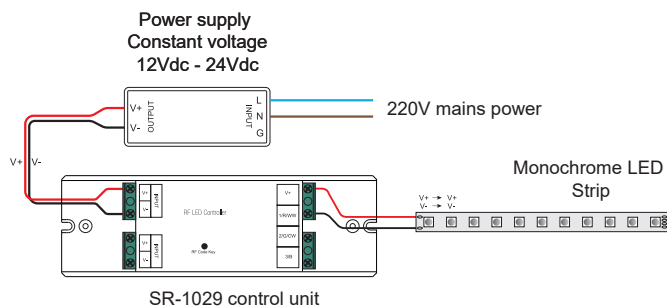

EXAMPLE OF DYNAMIC WHITE LED STRIP CONTROL

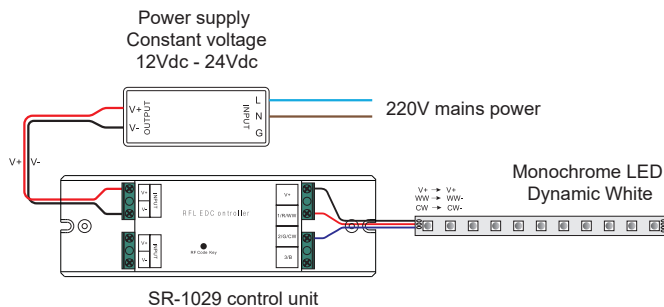

EXAMPLE OF RGB LED STRIP CONTROL

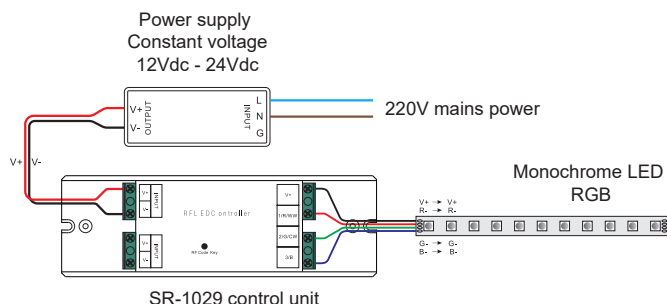


RFL20K control unit

Three-channel control unit for 12Vdc or 24Vdc constant voltage control of RGB LED strips, radio remote control included. On/off function, dimmer, choice of colours, choice of scene speed and active memory. Possibility of expanding the system with up to nine RGB.AMF amplifiers. Installation in unshielded indoor locations.


Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 18A - 12/24Vdc


Power rating: 216W@12Vdc - 432W@24Vdc



EXAMPLE OF RGB LED STRIP CONTROL

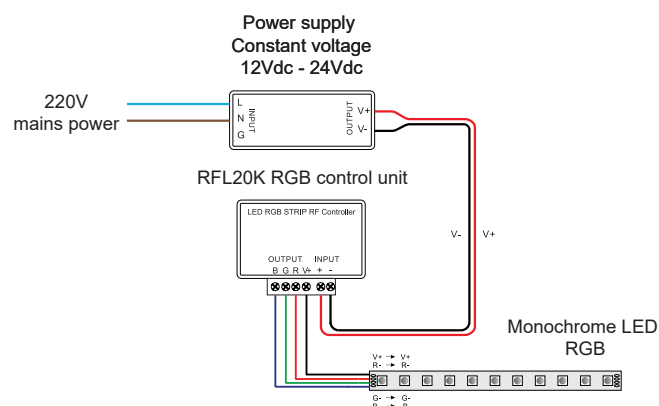

EXAMPLE OF RGB LED STRIP CONTROL WITH AMPLIFIER

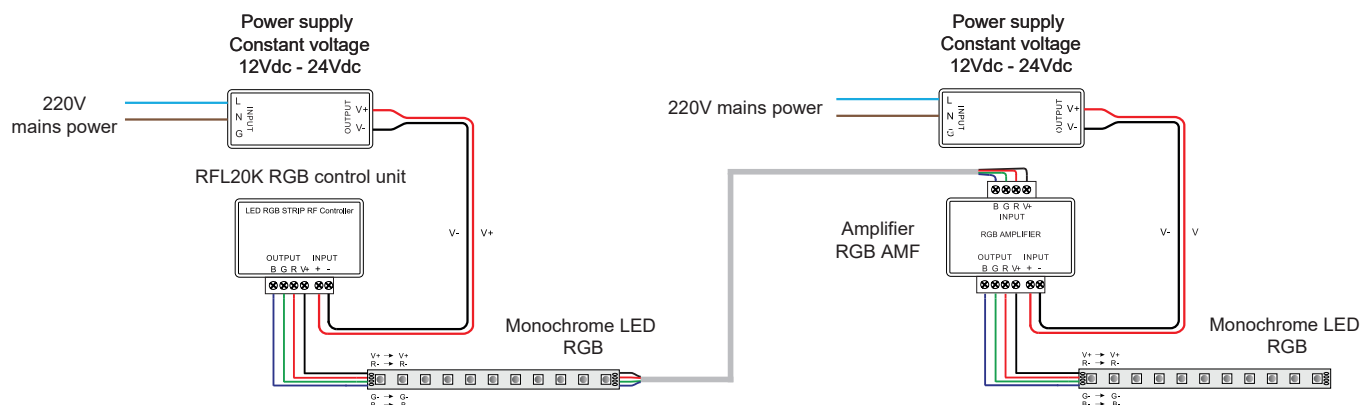


SR-1029W control unit

Professional four-channel control unit for 24Vdc constant voltage control of RGBW LED strips. Simple, intuitive pairing system between control units and radio remote controls. A remote control can be combined with several control units to expand the system Installation in unshielded indoor locations. Active memory function.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 3x5A - 12/24Vdc

Power rating: 3x60W@12Vdc - 3x120W@24Vdc




SR-2839RGBW Radio remote control for RGBW LEDs



Quick, precise colour selection and adjustment via the mini round touch panel.
Adjustment of light intensity of the chosen colour via a single button.
Adjustment of light intensity of the primary colours via three buttons.
Two pre-set scenes can be stored.
Possibility of adjusting the speed of scenes.
Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.

EXAMPLE OF RGBW LED STRIP CONTROL

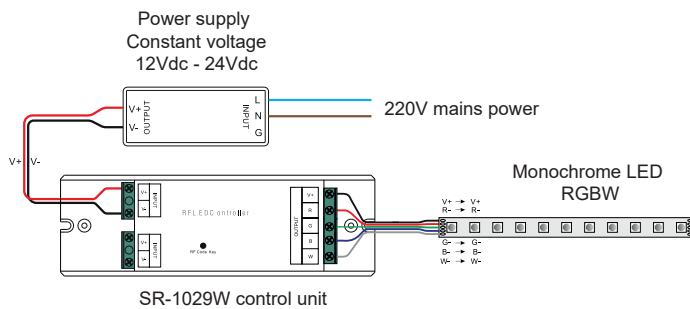


SR-1009FA3 control unit

Professional four-channel control unit for 350mA constant current control of monochrome, dynamic white or RGB power LEDs. Simple, intuitive pairing system between control units and radio remote controls. A remote control can be combined with several control units to expand the system Installation in unshielded indoor locations. Active memory function.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 4x350mA - 12/24Vdc

Power rating: 4x4.2W@12Vdc - 4x8.4W@24Vdc



SR-2819SDIM Radio remote control for monochrome LEDs
Quick, precise light intensity selection and control via the round mini-touch panel.
Three pre-set scenes can be stored. Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%. Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.




SR-2819SCCT Radio remote control for dynamic white LED
Quick, precise colour temperature selection and adjustment via the mini round touch panel.
Light intensity adjustment via two buttons.
Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%. Three pre-set scenes can be stored. Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.




SR-2819S Radio remote control for RGB LEDs
Quick, precise colour selection and adjustment via the mini round touch panel.
Adjustment of light intensity of the chosen colour via a single button. Adjustment of light intensity of the primary colours via three buttons. Preset scene selection via single button. Possibility of adjusting the speed of scenes.
Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.




EXAMPLE OF MONOCHROME LED SPOT CONTROL

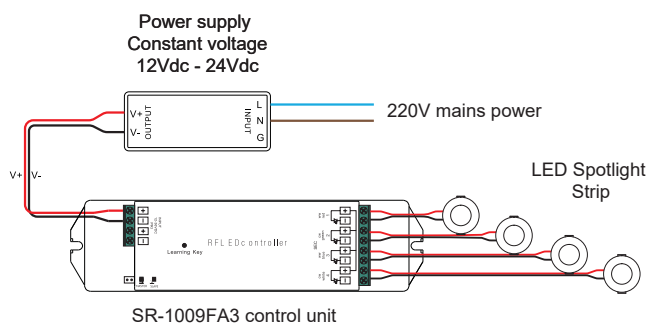

EXAMPLE OF DYNAMIC WHITE LED SPOTLIGHTS

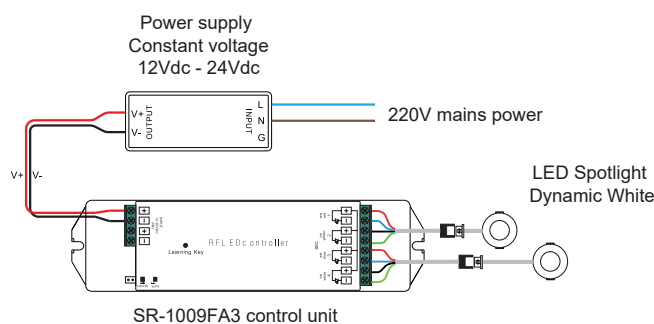

EXAMPLE OF RGB LED SPOTLIGHT CONTROL

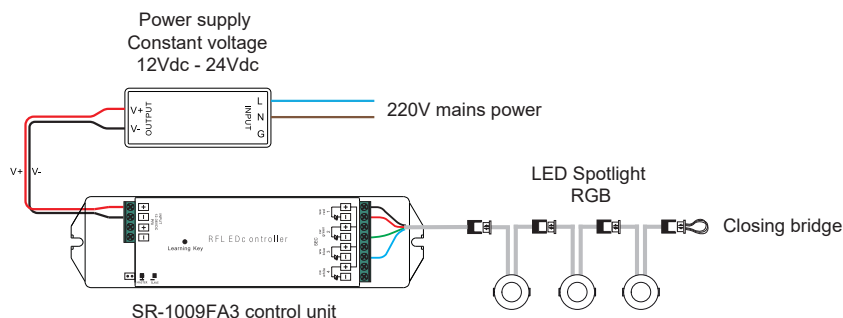

DLM1224-1CV control unit


One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. Control via a normally open button, 0-10V / 1-10V signal or potentiometer. The system can be expanded with the use of additional control units. Can be installed in unshielded indoor environments.

Active memory function.


Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 10A - 12/24Vdc


Power rating: 120W@12Vdc - 240W@24Vdc



EXAMPLE OF MONOCHROME LED STRIPS CONTROL

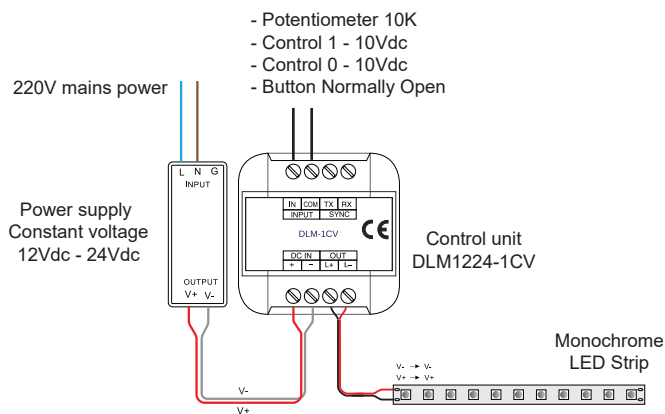

EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH AMPLIFIER

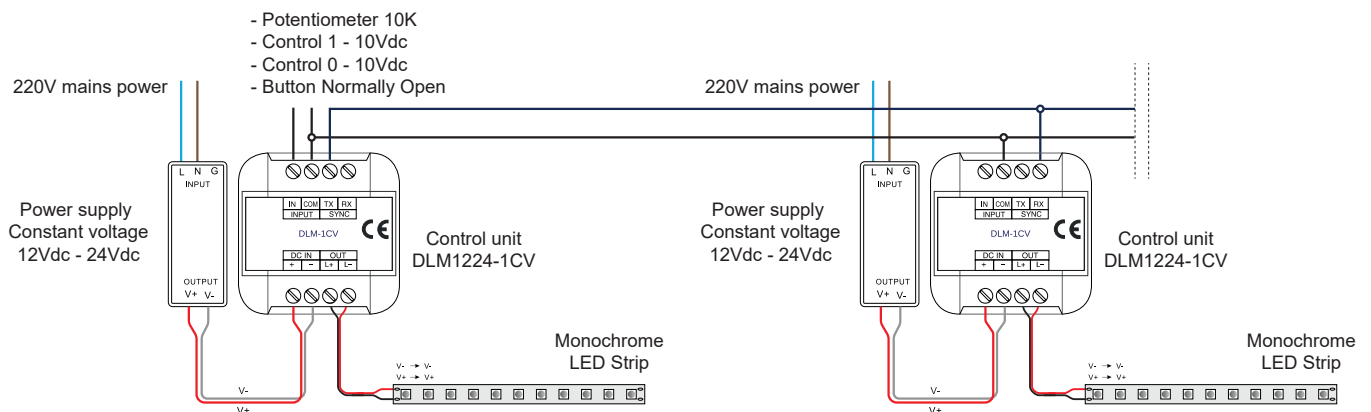

MINI-1CV control unit


One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. Control via a normally open button, 0-10V / 1-10V signal or potentiometer. The system can be expanded with the use of additional control units. Can be installed in unshielded indoor environments.

Active memory function. Using the LightApp mobile application, it is possible to configure the dimming frequency, dimming curve, brightness level and dynamic scenarios or animations.


Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 12A - 12/24Vdc


Power rating: 144W@12Vdc - 288W@24Vdc



EXAMPLE OF MONOCHROME LED STRIPS CONTROL

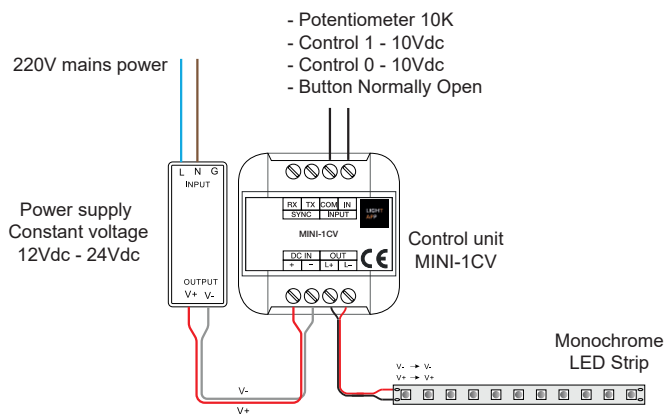

EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH AMPLIFIER

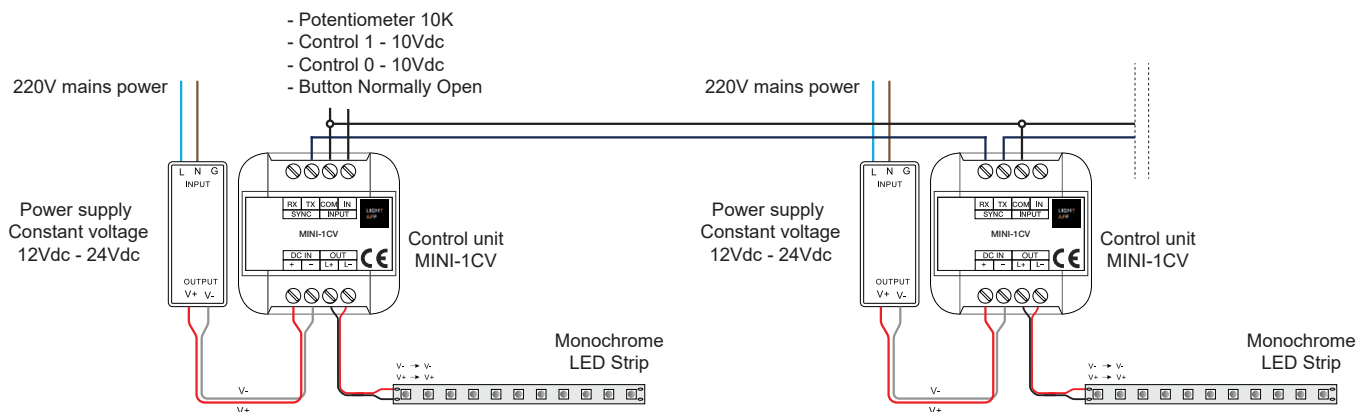


MINI-1CV-DALI control unit

One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. DALI control system via a normally open button, 0-10V / 1-10V signal or potentiometer. Can be installed in unshielded indoor environments. Active memory function. Using the LightApp mobile application, it is possible to configure the dimming frequency, dimming curve, brightness level and dynamic scenarios or animations.


Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 10A - 12/24Vdc

Power rating: 120W@12Vdc - 240W@24Vdc



EXAMPLE OF MONOCHROME LED STRIPS CONTROL

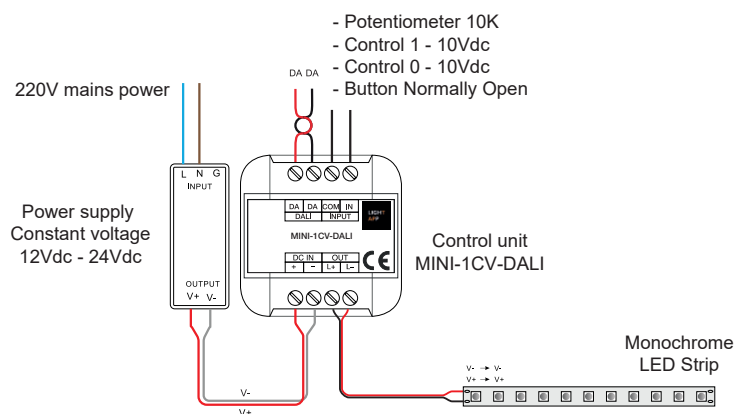


MINI-1CV-CASAMBI control unit

One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. CASAMBI control system or via a normally open button. Can be installed in unshielded indoor environments. Active memory function. Using the CASAMBI application, it is possible to make simple brightness adjustments right up to more complex lighting control systems, thanks to the creation of multiple scenes, animations, timers, daylight controls, etc.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 12A - 12/24Vdc


Power rating: 144W@12Vdc - 288W@24Vdc



MINI-1CV-CASAMBI



EXAMPLE OF MONOCHROME LED STRIPS CONTROL

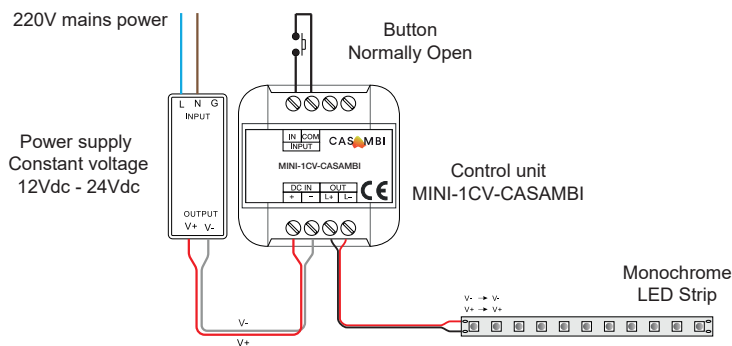

LINE-5CV control unit


Five-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome, dynamic white, RGB or RGBW LEDs. Control system via two normally open buttons. Can be installed in unshielded indoor environments. The system can be expanded with the use of the DLA-1224-4CV amplifier.

Active memory function.


Power supply voltage: $V_{in} = V_{out} - 12/24/48Vdc$

Output current: 12A - 12/24/48Vdc

Power rating: 144W@12Vdc - 288W@24Vdc - 576W@48Vdc

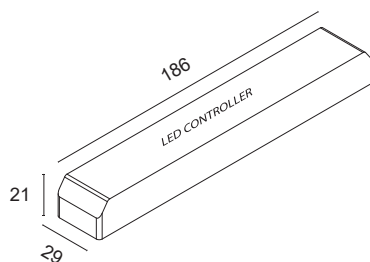

EXAMPLE OF RGBW LED STRIP CONTROL

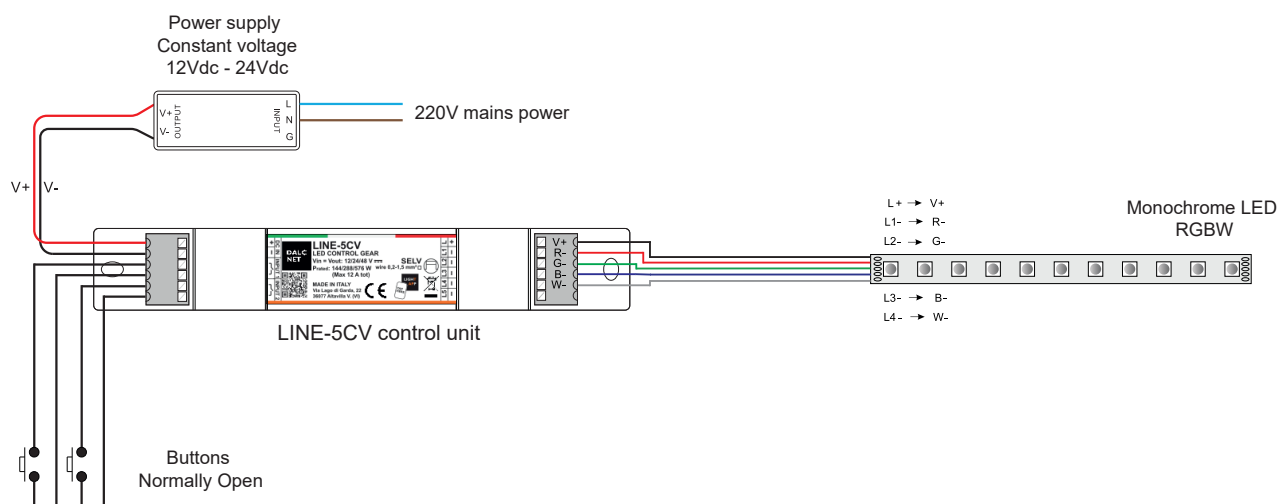


DLX1224-4CV-DALI control unit

Four-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome, dynamic white, RGB or RGBW LEDs. DALI control system or via DIP-SWITCH. Can be installed in unshielded indoor environments. The system can be expanded with the use of the DLA-1224-4CV amplifier. Active memory function.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 10A - 12/24Vdc

Power rating: 120W@12Vdc - 240W@24Vdc




DLX1224-4CV-DALI




DLA1224-4CV



EXAMPLE OF RGBW LED STRIP CONTROL

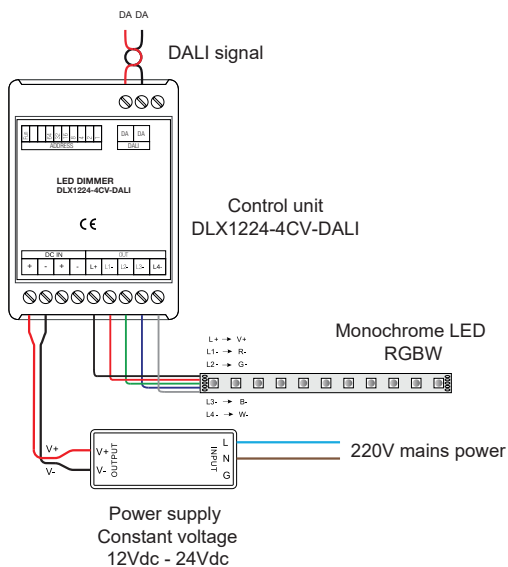

EXAMPLE OF RGBW LED STRIP CONTROL WITH AMPLIFIER

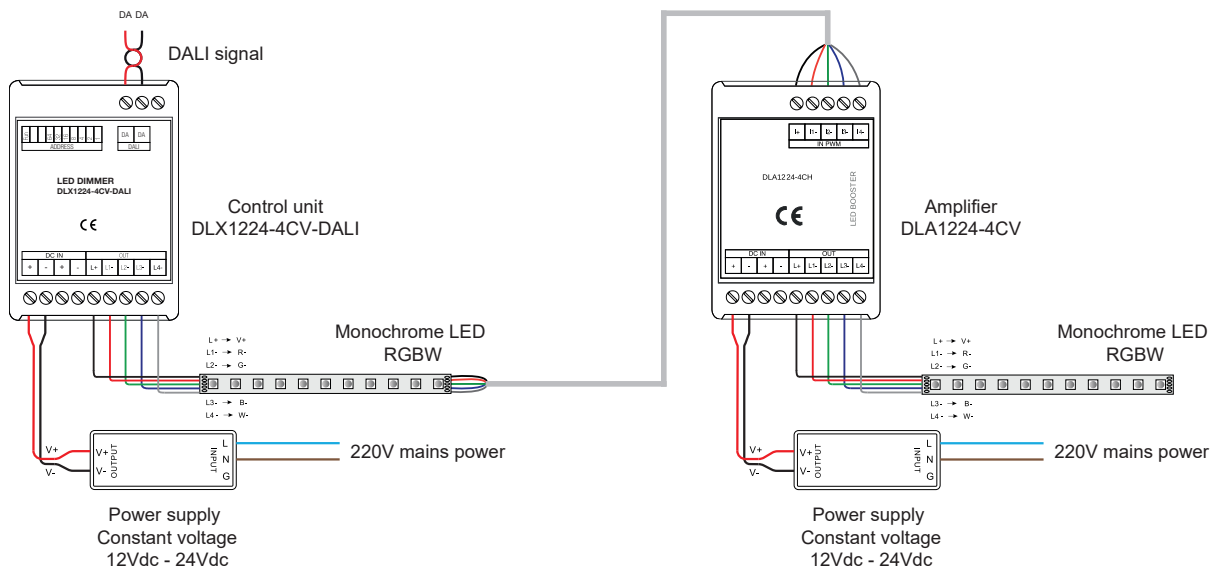


LINE 5CV-CASAMBI CONTROL UNIT

Five-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome, dynamic white, RGB or RGBW LEDs. Control system via two normally open buttons. Can be installed in unshielded indoor environments. The system can be expanded with the use of the DLA-1224-4CV amplifier. Active memory function. Using the CASAMBI application, it is possible to make simple brightness adjustments right up to more complex lighting control systems, thanks to the creation of multiple scenes, animations, timers, daylight controls, etc.


Power supply voltage: $V_{in} = V_{out} - 12/24/48Vdc$

Output current: 12A - 12/24/48Vdc

Power rating: 144W@12Vdc - 288W@24Vdc - 576W@48Vdc

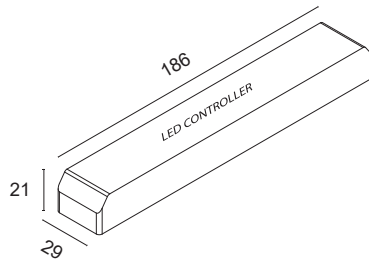

EXAMPLE OF RGBW LED STRIP CONTROL

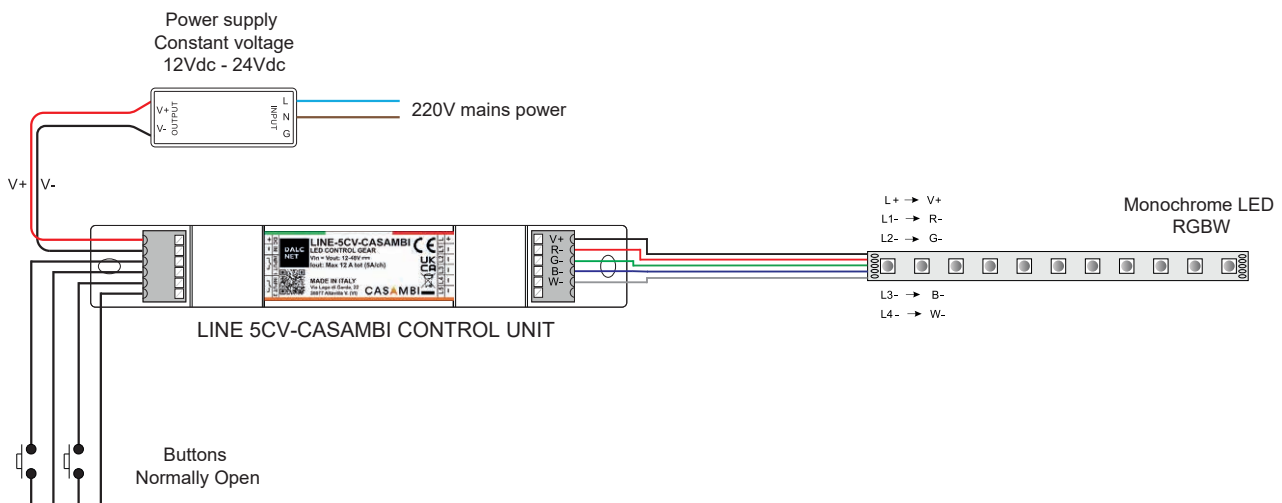

DLC1248-1CC350 control unit

DLC1248-1CC500 control unit


One-channel control unit with ON/OFF and DIMMER function for 350mA or 500mA constant voltage monochrome LEDs. control system via a normally open button. Possibility to expand the system with the use of DLA1248-1CC350 or DLA1248-1CC500 amplifiers. Can be installed in unshielded indoor environments.

Memory function possible.

Power supply voltage: $V_{in} = 24Vdc$

Output current: 350mA - 500mA

Power rating: 8.4W@350mA Total - 12W@500mA Total



DLC1248-1CC350
DLC1248-1CC500




DLA1248-1CC350
DLA1248-1CC500




EXAMPLE OF MONOCHROME LED SPOTLIGHT CONTROL

- Connected to 5V = MEMORY
- Connected to 5V = NO MEMORY

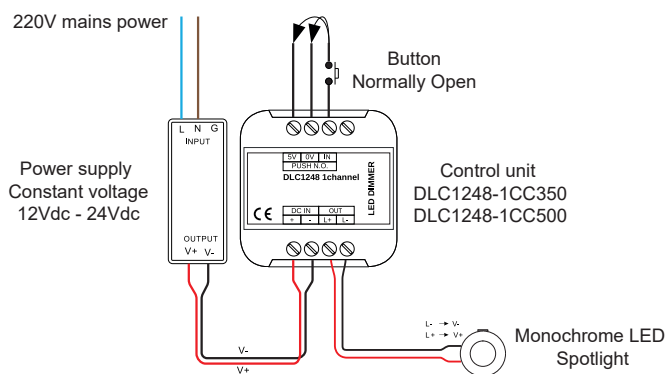

EXAMPLE OF MONOCHROME LED SPOTLIGHT CONTROL WITH AMPLIFIER

- Connected to 5V = MEMORY
- Connected to 5V = NO MEMORY

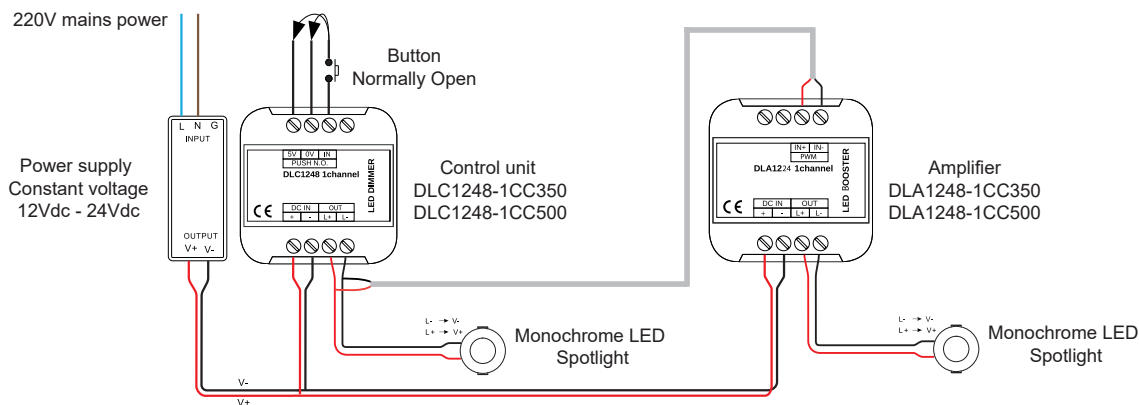

DLX1224-4CC350 control unit


DLX1224-4CC500 control unit

Four-channel control unit with ON/OFF and DIMMER function for 350mA or 500mA constant voltage RGB LEDs. Control system via two normally open buttons. Possibility to expand the system with the use of DLA1224-4CC350 or DLA1224-4CC500 amplifiers. Can be installed in unshielded indoor environments. Memory function possible.

Power supply voltage: $V_{in} = 24Vdc$

Output current: 350mA - 500mA

Power rating: 33.6W@350mA Total - 48W@500mA Total




DLX1224-4CC350
DLX1224-4CC500




DLA1224-4CC350
DLA1224-4CC500



EXAMPLE OF RGB LED SPOTLIGHT CONTROL

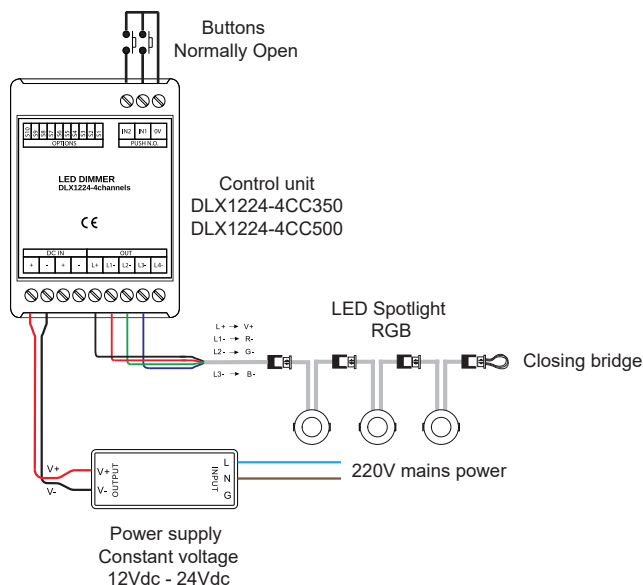

EXAMPLE OF RGB LED SPOTLIGHT CONTROL WITH AMPLIFIER

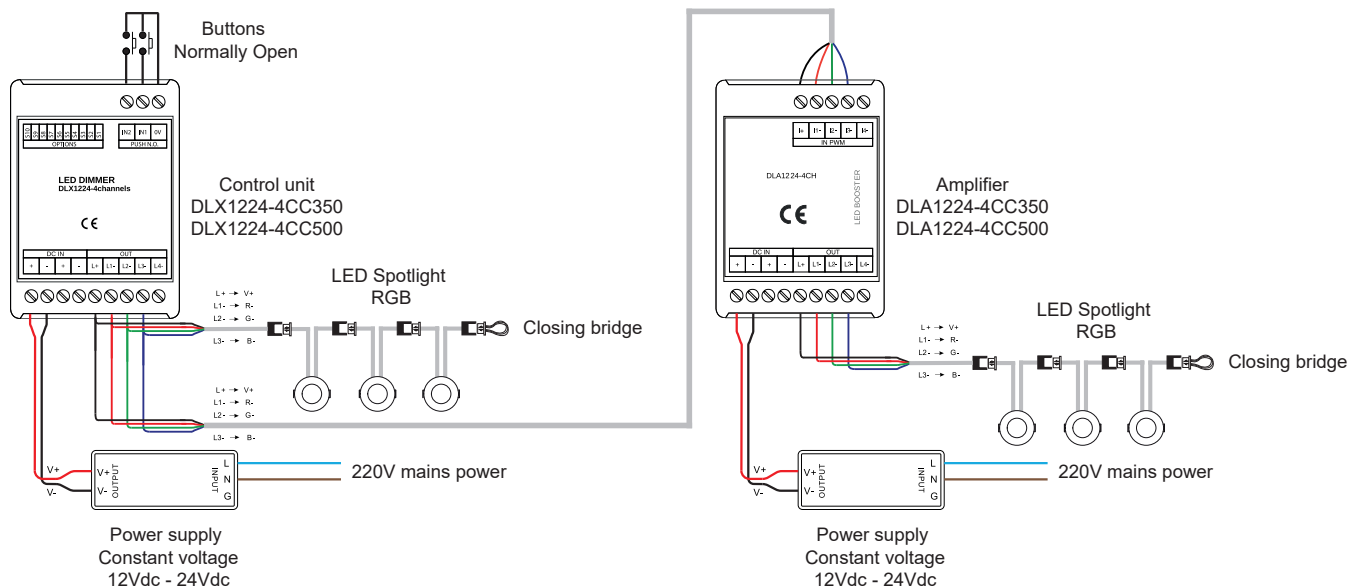


VOLUMETRIC SENSOR

Electronic device for switching the constant voltage LED on and off. Up to a maximum distance of 3m and at an angle of 120°, the SENSOR system detects a presence through movement and switches on the LED; if there is no movement, the system will switch off the LED after approximately 30 seconds. Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 4A - 12/24Vdc

Power rating: 48W@12Vdc - 96W@24Vdc

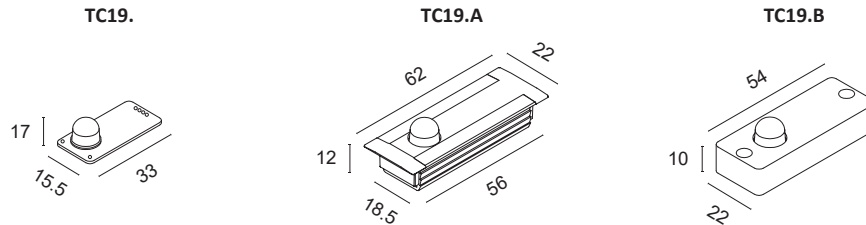


INFRARED SENSOR

Electronic device for switching the constant voltage LED on and off. The IR system will switch the LED on or off with hand movement up to a maximum distance of 10cm. Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 4A - 12/24Vdc

Power rating: 48W@12Vdc - 96W@24Vdc

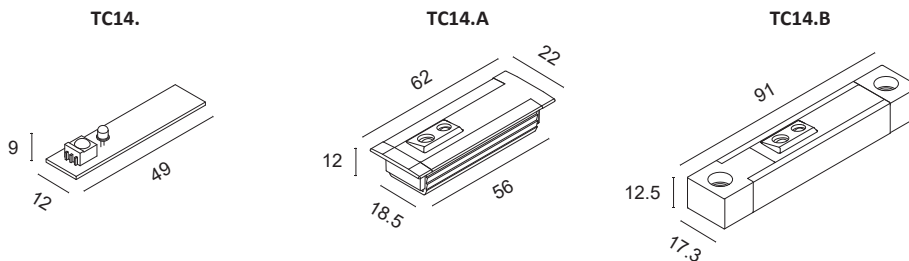


TOUCH SENSOR

Electronic device for switching the constant voltage LED on and off. The TOUCH system will switch the LED on or off with a light touch of the hand. Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 4A - 12/24Vdc

Power rating: 48W@12Vdc - 96W@24Vdc

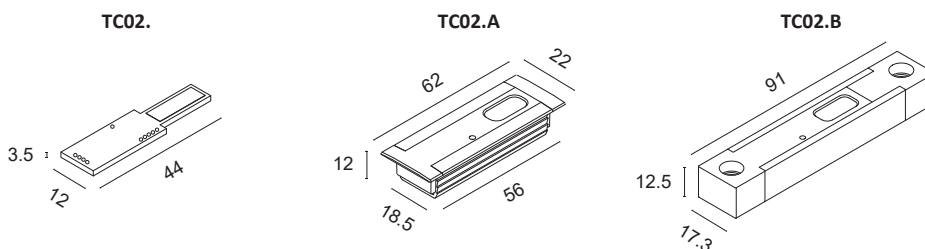

TOUCH MINI SENSOR



Electronic device for switching the constant voltage LED on and off. The TOUCH system will switch the LED on or off with a light touch of the hand. Supplied only pcb tested and wired.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$

Output current: 3A - 12/24Vdc

Power rating: 48W@12Vdc - 96W@24Vdc

TC22.

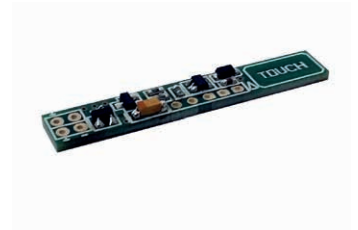

TOUCH DIMMER SENSOR


Electronic device for adjusting and switching the constant voltage LED on and off. The TOUCH system switches the LED on or off with a light touch of the hand. Lightly pressing the DIMMER system will increase or decrease the light intensity. Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: $V_{in} = V_{out} - 12/24Vdc$


Output current: 4A - 12/24Vdc

Power rating: 48W@12Vdc - 96W@24Vdc



TC20.



TC20.A



TC20.B

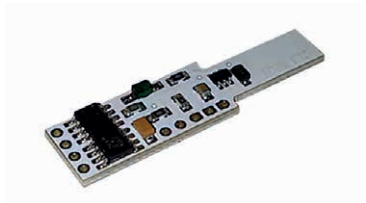


MINI MOTION DETECTOR

Electronic device for switching on and off via the volumetric sensor. The controller turns on the switch when body movement is detected within its range. The switch switches off after the time set in the controller's timer has elapsed. Set the desired timing on the potentiometer. The switch-on time can be set from 10sec. to 3 minutes.

Power supply voltage: $V_{in} = V_{out} - 100/240V_{ac}$

Power rating: Max 250W

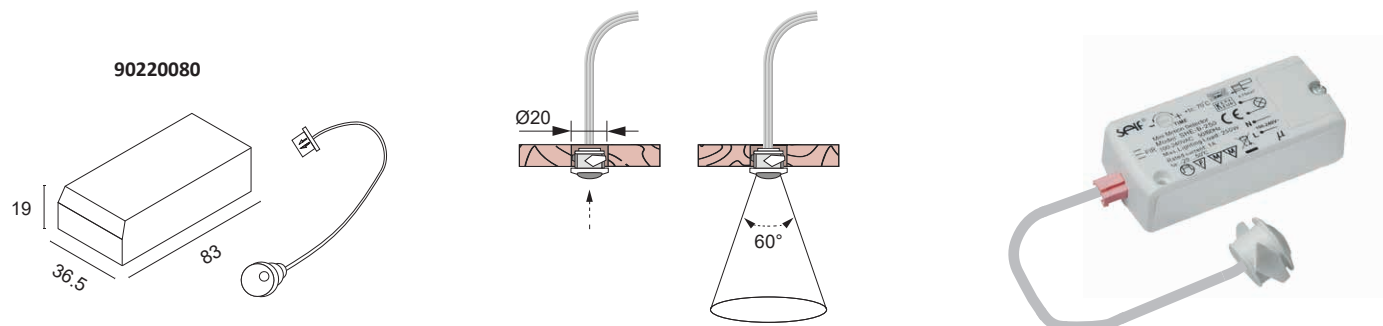


TOUCH SENSOR SWITCH

Electronic device for switching on and off via the TOUCH system. The device turns by lightly touching the sensitive surface connected to the controller's touch sensor. The device's sensitivity is preset to a mid-range; it can be adjusted by turning the potentiometer on the side of the device.

Power supply voltage: $V_{in} = V_{out} - 220/240V_{ac}$

Power rating: Max 500W

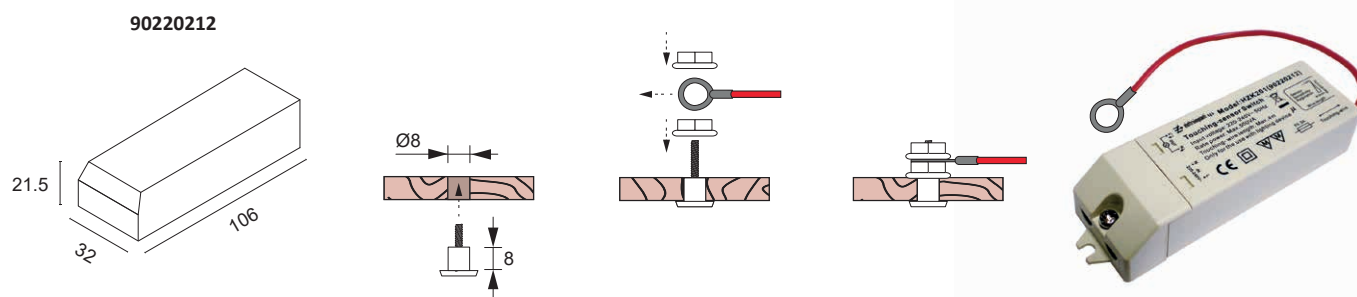



IR SENSOR SWITCH

Electronic device for switching on and off via the INFRARED system. The sensor reacts to approaching objects or hands. The IR sensor controller switches on when it detects a body in its range and switches off when a body is detected again.

Power supply voltage: $V_{in} = V_{out} - 100/240V_{ac}$

Power rating: Max 250W

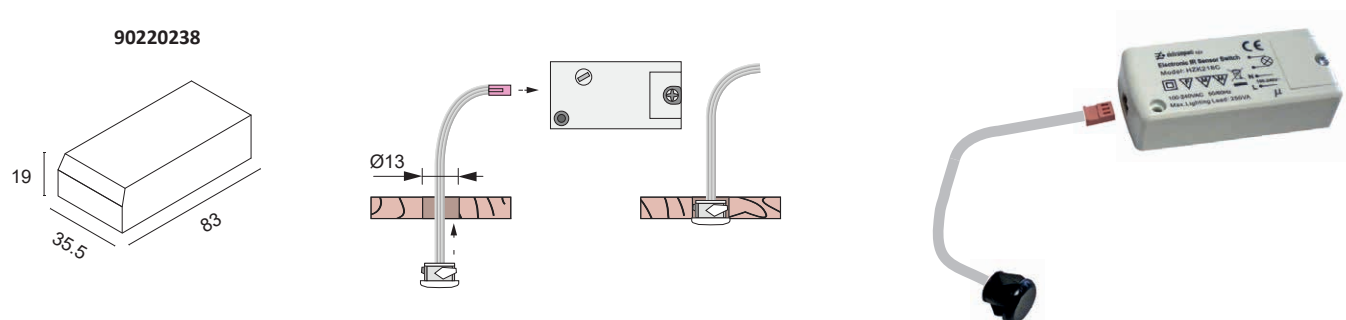

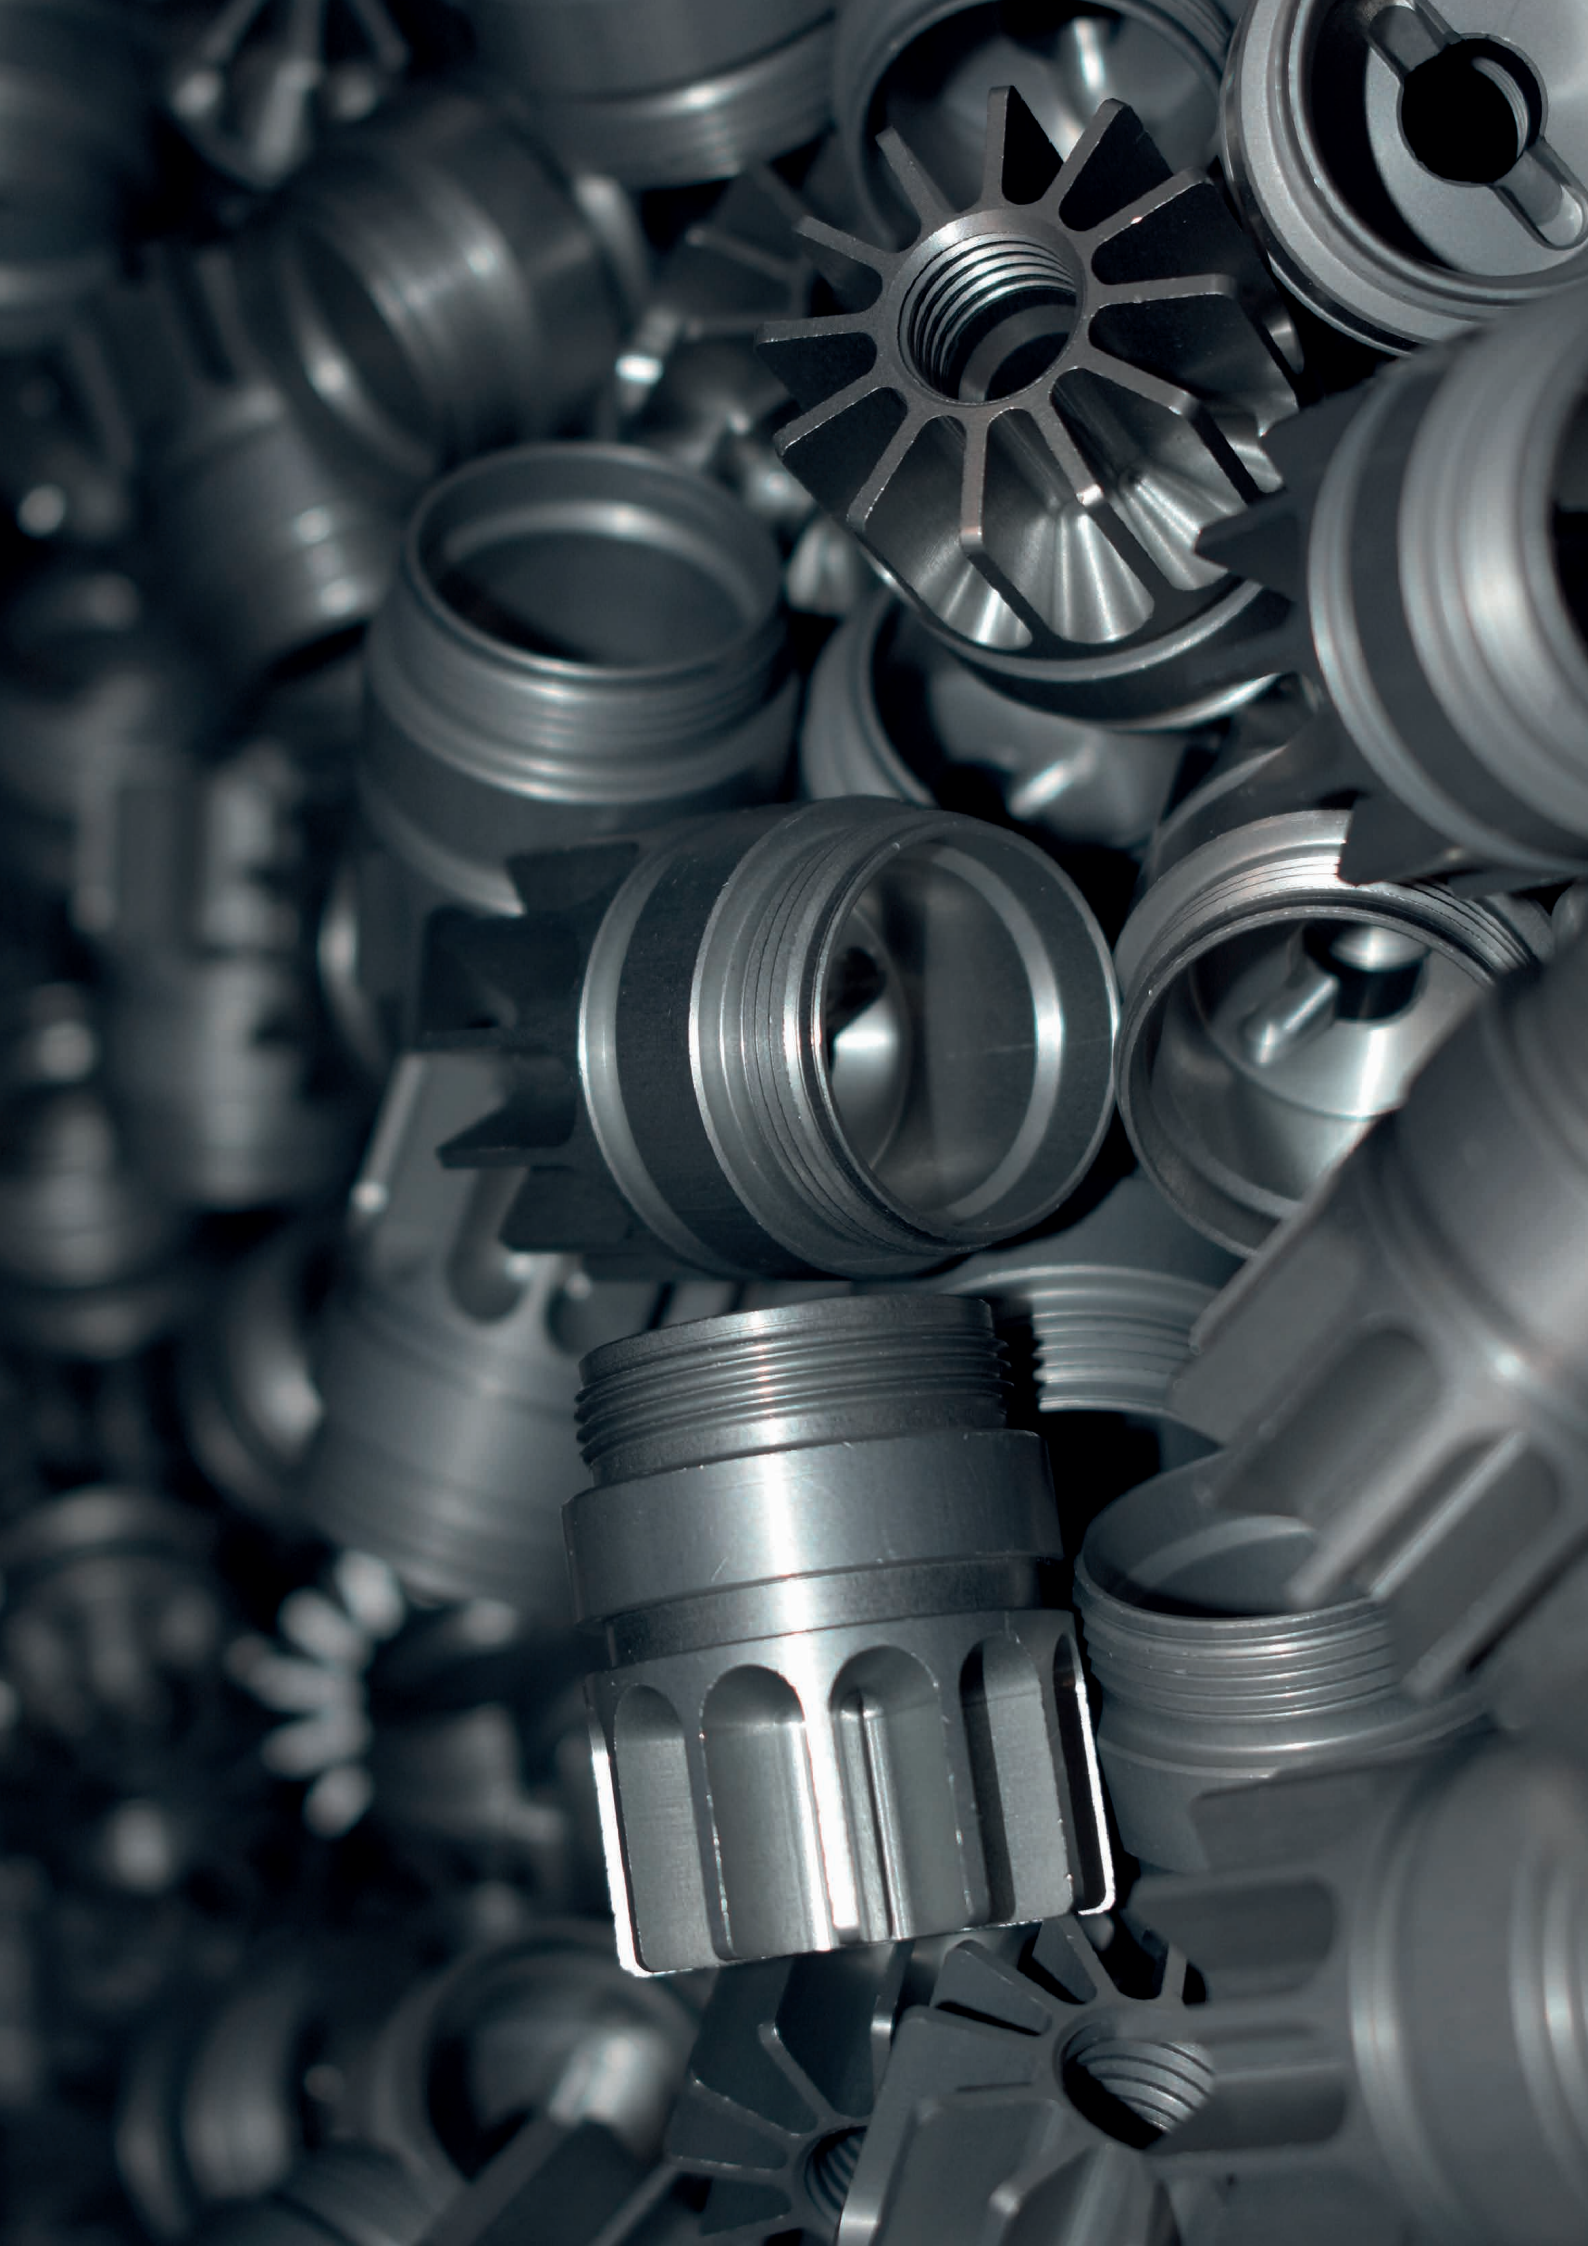



INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK	270
ACSO AND ACRUX SERIES FORMWORK	270
ACSO AND ACRUX SERIES RING	270
DEHO AND DARDO FORMWORK	271
DEHO AND DARDO SERIES RING	271
PAD FORMWORK	271
REMOVE PLUS FORMWORK	272
REMOVE MINUS FORMWORK	272
DUVAR BASE AND STAKE	272


HOLLY, HALISSA AND MEMO FORMWORK

Thermoplastic formwork for HOLLY, HALISSA and MEMO series models for use during installation.
Can be installed in brick walls or floors. Necessary for correct installation.


548/20



Position the formwork flush with the wall or floor.



Fix the formwork with glue or putty and level it flush with the wall or floor. Prevent foreign bodies from entering the formwork.






Connect the electricals as stipulated in the product sheet and check it works correctly. Insert the product into the formwork using light pressure.


ACSO AND ACRUX SERIES FORMWORK

Thermoplastic formwork for ACSO and ACRUX series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.


548/80



Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.



Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.






After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.


ACSO AND ACRUX SERIES RING

Aluminium ring for ACSO and ACRUX series models for use during flush fitting in plasterboard.


TES0065



Place the ring in the spotlight.






Secure the ring with the supplied grub screws.




Drill the plasterboard to the indicated size and insert the spotlight into the hole.

DEHO AND DARDO FORMWORK


Thermoplastic formwork for DEHO and DARDO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.



Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.





Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.




After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.

DEHO AND DARDO SERIES RING


Aluminium ring for DEHO and DARDO series models for use during flush fitting in plasterboard.



Place the ring in the spotlight.






Secure the ring with the supplied grub screws.




Drill the plasterboard to the indicated size and insert the spotlight into the hole.

PAD FORMWORK


Metal formwork for the PAD model for use during installation. Can be wall mounted on stone, brick or plasterboard. Necessary for correct installation.

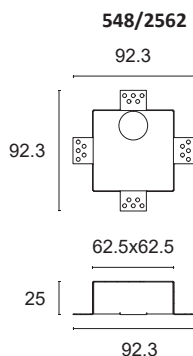

Insert the housing for the formwork and fix it with glue, putty or screws.






Finish off the edges of the formwork and prevent foreign bodies from entering the formwork. Route the electrical cable from the formwork to the shaft or to the shunt box.




Connect the electricals according to the product sheet, check that it works properly and insert it into the formwork using light pressure.

REMOVE PLUS FORMWORK


Metal formwork for the REMOVE PLUS model for use during installation. Can be wall mounted on stone, brick or plasterboard. Necessary for correct installation.



Insert the housing for the formwork and fix it with glue, putty or screws.





Finish off the edges of the formwork and prevent foreign bodies from entering the formwork. Route the electrical cable from the formwork to the shaft or to the shunt box.




Connect the electricals according to the product sheet, check that it works properly and insert it into the formwork using light pressure.

REMOVE MINUS FORMWORK


Metal formwork for the REMOVE MINUS model for use during installation. Can be wall mounted on stone, brick or plasterboard. Necessary for correct installation.

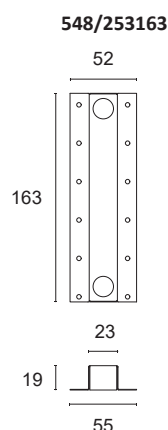

Insert the housing for the formwork and fix it with glue, putty or screws.







Finish off the edges of the formwork and prevent foreign bodies from entering the formwork. Route the electrical cable from the formwork to the shaft or to the shunt box.



Connect the electricals according to the product sheet, check that it works properly and insert it into the formwork using light pressure.

DUVAR BASE AND STAKE

Mounting systems for DUVAR projector, necessary for correct installation.

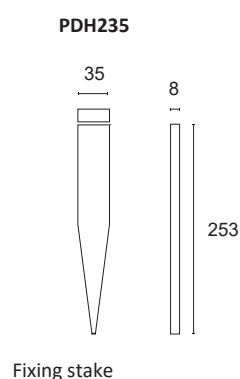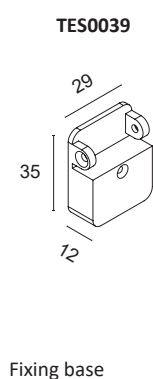







COMPLEMENTARY SYSTEMS

REM COMPLEMENTARY SYSTEMS	276
DARK COMPLEMENTARY SYSTEMS	276

COMPLEMENTARY SYSTEMS REM

Ø32mm anodised aluminium directional projector decorated with CRI>90 LEDs for spot, decorative or courtesy lighting.
Choice of secondary optics, can be installed indoors, with concealed faceplate on Delta or Kappa pendant,
Delta or Kappa flush ceiling light, or flush-mounted Delta or Tau.
N.B. positioning, switch on management and other details to be defined in the order.

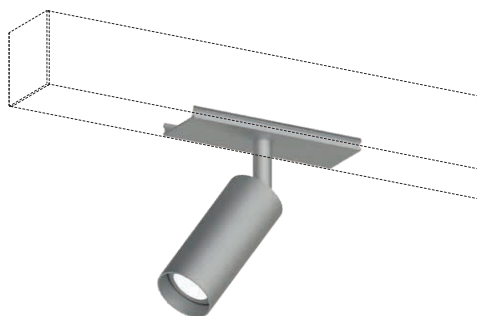

BASIC CODES

RG1.

FINISHES

- 1 White
- 2 Matt black
- 7 Brushed aluminium
- 9 Polished gold

LIGHT BEAM

- 15 15°
- 25 25°
- 35 35°

LED COLOUR

- BN 4000K
- BC 3000K
- CC 2700K
- BL Blue
- VE Green
- RO Red
- AM Amber



POWER



- 3 1x2W
500mA - 216 lm
- 5 3x2W
500mA - 648 lm

Code example:

REM + White + Light Beam 15° + 4000K + 2W = Code: RG1.115BC3

DARK

320mm anodised aluminium module decorated with 14 high-efficiency CRI>90 LEDs for spot, decorative or courtesy lighting.
Choice of secondary optics, can be installed indoors, with flush-mounted faceplate on Delta or Kappa pendant,
Delta or Kappa flush ceiling light, or flush-mounted Delta or Tau.
N.B. positioning, switch on management and other details to be defined in the order.

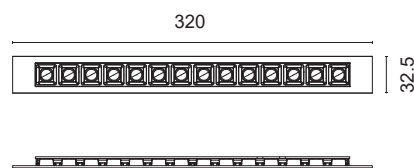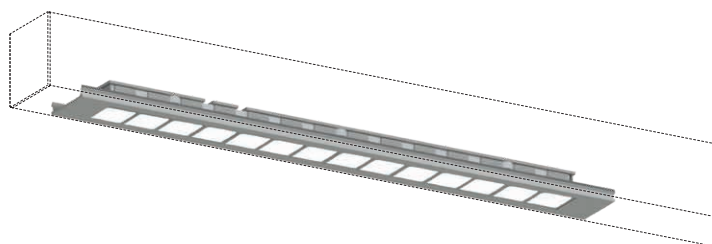

BASIC CODES

DK14.

FACEPLATE FINISH

- 1 White
- 2 Matt black
- 7 Brushed aluminium

*Other finishes on request.

LIGHT BEAM

- 30 30°
- 55 55°
- 65 65°

LED COLOUR

- BN 4000K
- BC 3000K
- CC 2700K

POWER

- 1 7.2W
24Vdc - 780 lm

Code example:

DARK + White + Light Beam 30° + 4000K + 7.2W = Code: DK14.130BN1





NANOLED LIGHTING

It is a brand of Tecnocavi Service srl
61021 Carpegna (PU) via Pian dei Roghi, 32
Tel. + 39 0722 77418
www.nanoledlighting.com

CONTACTS

Information office

info@nanoledlighting.com

Federico Francioni

Owner and Sales Manager
federico@nanoledlighting.com

Francesco Francioni Jr.

Italy Sales
commerciale@nanoledlighting.com

Fabrizio Francioni

Owner and Production and Procurement Manager
fabrizio@nanoledlighting.com

Francesco Francioni

Owner and General Management
francesco@nanoledlighting.com


Francesca Severi

Head of Administration
amministrazione@nanoledlighting.com

2025 LIGHTING CATALOGUE Ed. 03

Graphic design and realisation: Team Nanoled Lighting

Tecnocavi Service S.r.l. accepts no liability for printing errors, measurements and technical data. The company reserves the right to make changes to the products illustrated, at any time, without prior notice. Unauthorised reproduction or copying is prohibited.

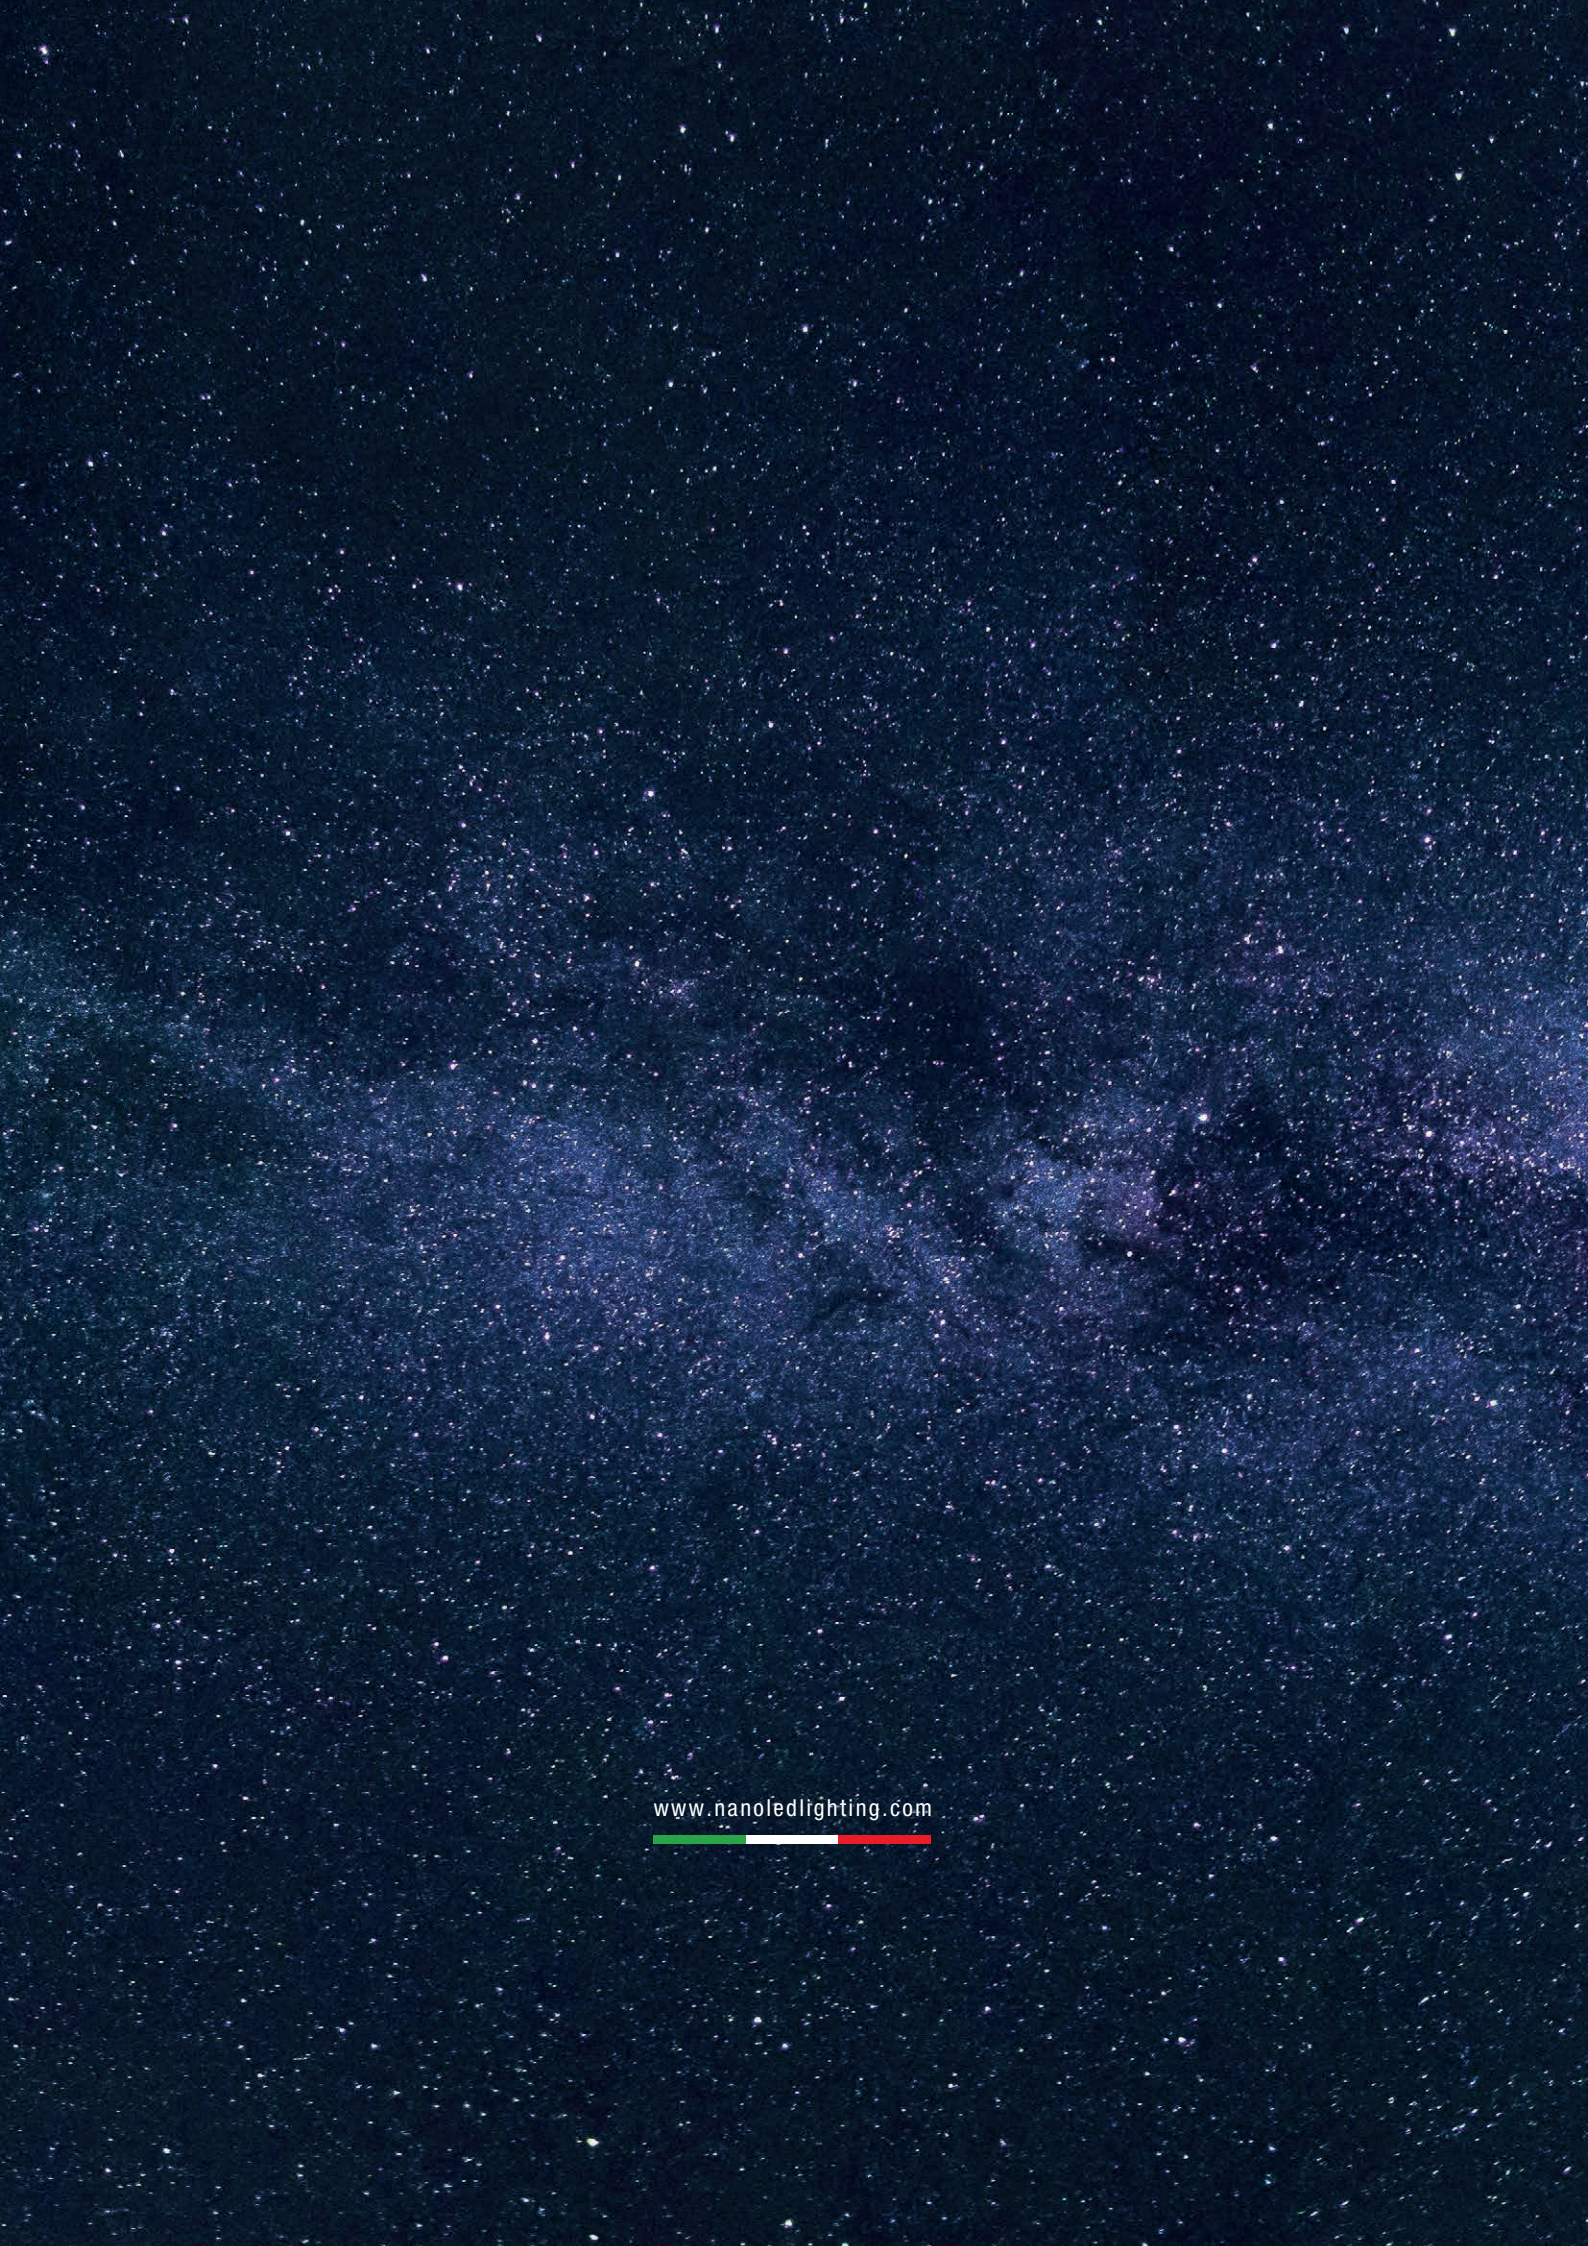

www.nanoledlighting.com

